

LH5316600

CMOS 16M (2M × 8/1M × 16)
Mask-Programmable ROM

FEATURES

- 2,097,152 words × 8 bit organization (Byte mode)
1,048,576 words × 16 bit organization (Word mode)
- Access time: 100 ns (MAX.)
- Power consumption:
Operating: 550 mW (MAX.)
Standby: 2750 μW (MAX.)
- Static operation
- TTL compatible I/O
- Three-state outputs
- Single +5 V power supply
- Packages:
42-pin, 600-mil DIP
44-pin, 600-mil SOP

DESCRIPTION

The LH5316600 is a 16M-bit mask-programmable ROM organized as 2,097,152 × 8 bits (Byte mode) or 1,048,576 × 16 bits (Word mode) that can be selected by a $\overline{\text{BYTE}}$ input pin. It is fabricated using silicon-gate CMOS process technology.

PIN CONNECTIONS

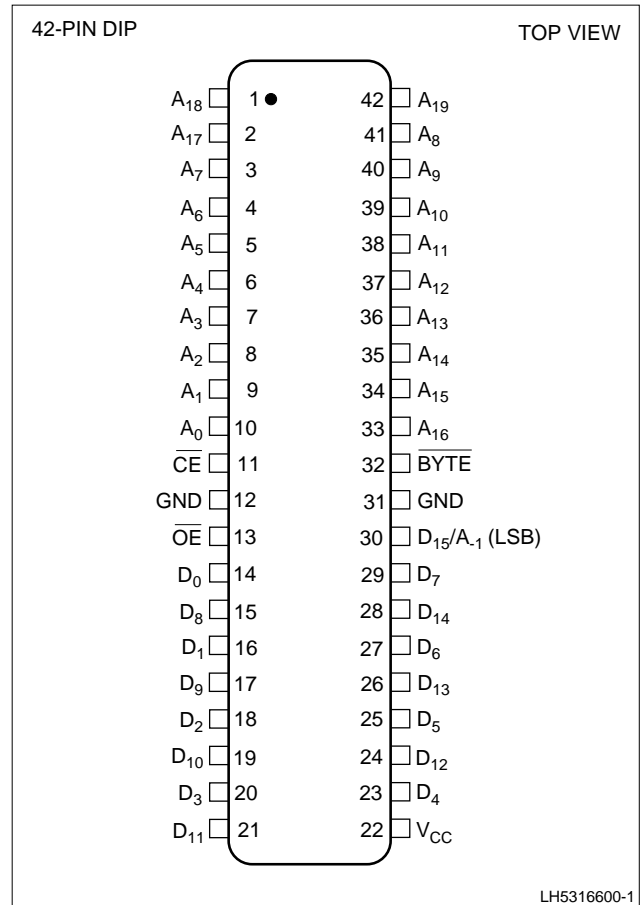


Figure 1. Pin Connections for DIP Package

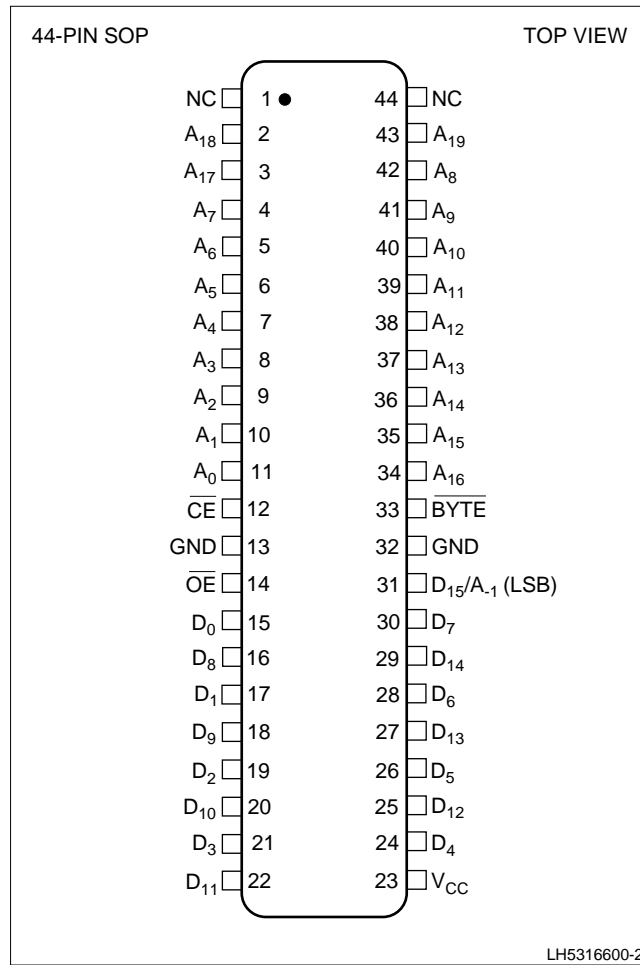


Figure 2. Pin Connections for SOP Package

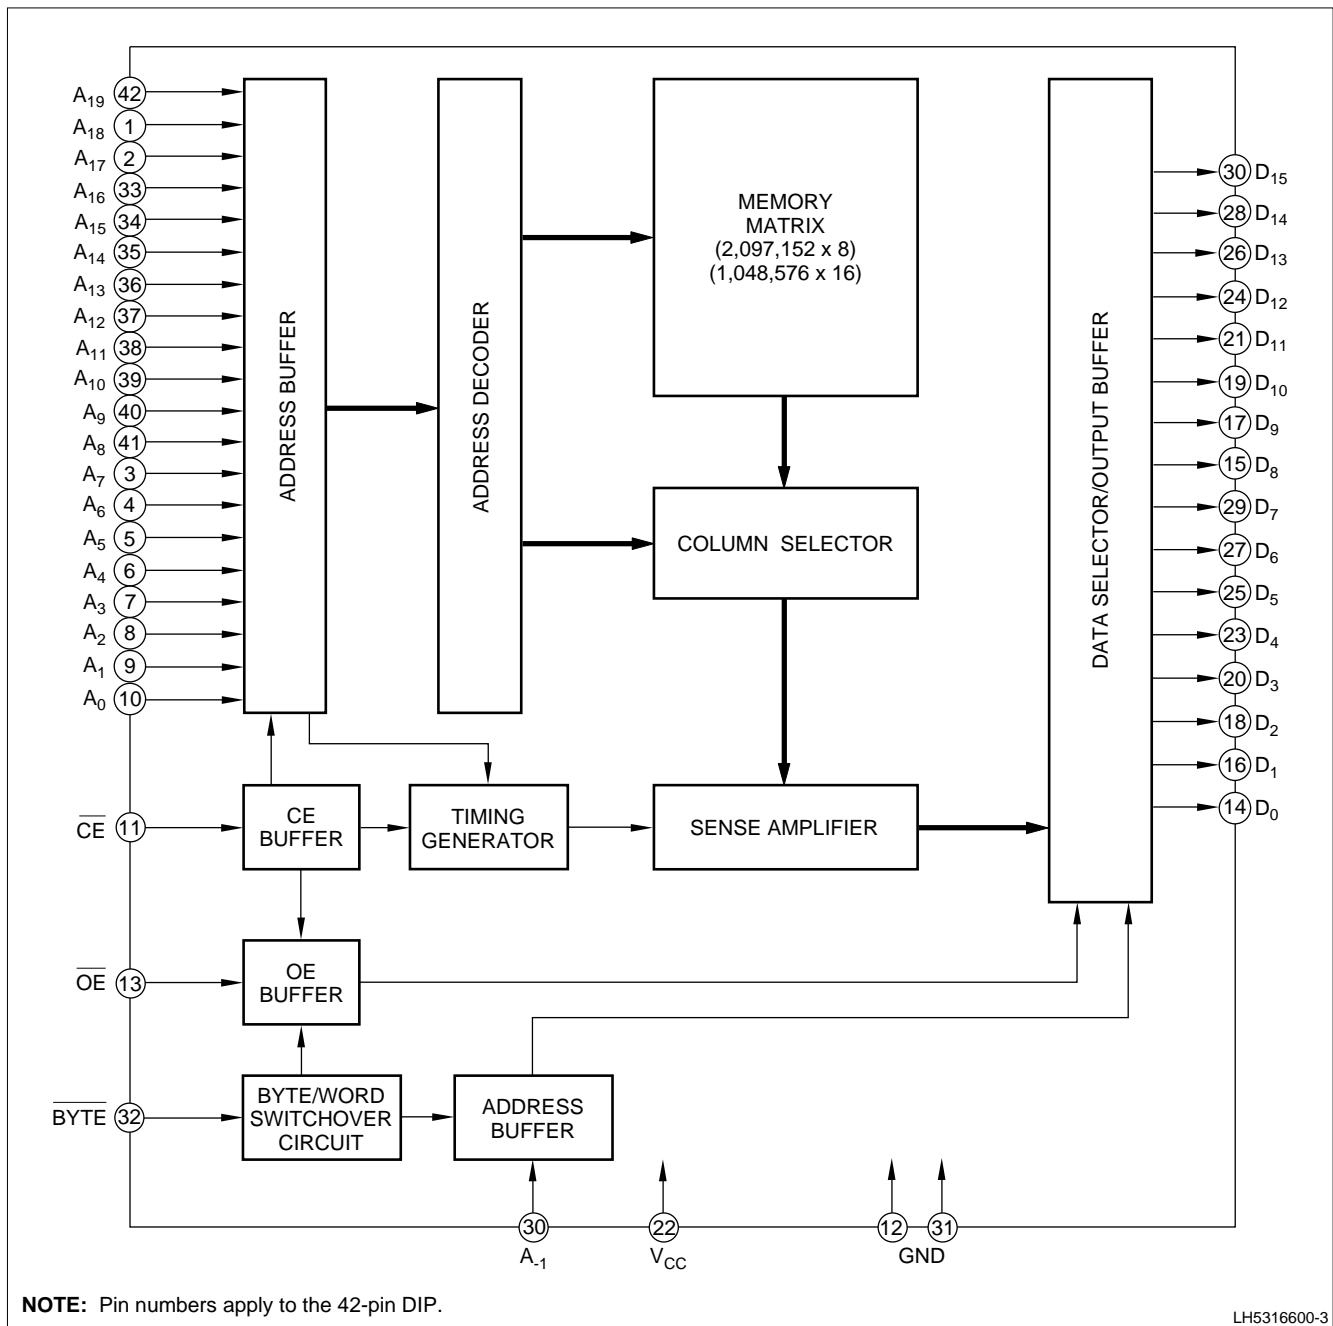


Figure 3. LH5316600 Block Diagram

PIN DESCRIPTION

SIGNAL	PIN NAME	NOTE
A ₋₁ – A ₁₉	Address input	
D ₀ – D ₁₅	Data output	
$\overline{\text{BYTE}}$	Byte/word mode switch	1
$\overline{\text{CE}}$	Chip Enable input	

SIGNAL	PIN NAME	NOTE
$\overline{\text{OE}}$	Output Enable input	
V _{CC}	Power supply (+5 V)	
GND	Ground	

NOTE:

1. The D₁₅/A₋₁ pin becomes LSB address input (A₋₁) when the $\overline{\text{BYTE}}$ pin is set to be LOW in byte mode, and data output (D₁₅) when set to be HIGH in word mode.

TRUTH TABLE

\overline{CE}	\overline{OE}	BYTE	A ₋₁ (D ₁₅)	DATA OUTPUT		ADDRESS INPUT		SUPPLY CURRENT
				D ₀ – D ₇	D ₈ – D ₁₅	LSB	MSB	
H	X	X	X	High-Z	High-Z	–	–	Standby (I _{SB})
L	H	X	X	High-Z	High-Z	–	–	Operating (I _{CC})
L	L	H	–	D ₀ – D ₇	D ₈ – D ₁₅	A ₀	A ₁₉	Operating (I _{CC})
L	L	L	L	D ₀ – D ₇	High-Z	A ₋₁	A ₁₉	Operating (I _{CC})
L	L	L	H	D ₈ – D ₁₅	High-Z	A ₋₁	A ₁₉	Operating (I _{CC})

NOTE:

X = H or L; High-Z = High-impedance

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Supply voltage	V _{CC}	–0.3 to +7.0	V
Input voltage	V _{IN}	–0.3 to V _{CC} + 0.3	V
Output voltage	V _{OUT}	–0.3 to V _{CC} + 0.3	V
Operating temperature	T _{opr}	0 to +70	°C
Storage temperature	T _{stg}	–65 to +150	°C

RECOMMENDED OPERATING CONDITIONS (T_A = 0°C to +70°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage	V _{CC}	4.5	5.0	5.5	V

DC CHARACTERISTICS (V_{CC} = 5 V ±10%, T_A = 0°C to +70°C)

PARAMETER	SYMBOL	CONDITIONS	MIN.	MAX.	UNIT	NOTE
Input 'High' voltage	V _{IH}		2.2	V _{CC} + 0.3	V	
Input 'Low' voltage	V _{IL}		–0.3	0.8	V	
Output 'High' voltage	V _{OH}	I _{OH} = –400 μA	2.4		V	
Output 'Low' voltage	V _{OL}	I _{OL} = 2.0 mA		0.4	V	
Input leakage current	I _{LI}	V _{IN} = 0 V to V _{CC}		10	μA	
Output leakage current	I _{LO}	V _{OUT} = 0 V to V _{CC}		10	μA	1
Operating current	I _{CC1}	t _{RC} = 100 ns		100	mA	2
	I _{CC2}	t _{RC} = 1 μs		90		
Standby current	I _{SB1}	$\overline{CE} = V_{IH}$		2	mA	
	I _{SB2}	$\overline{CE} = V_{CC} - 0.2 V$		500		
Input capacitance	C _{IN}	f = 1 MHz		10	pF	
Output capacitance	C _{OUT}	T _A = 25°C		10	pF	

NOTES:

1. $\overline{CE}/\overline{OE} = V_{IH}$
2. V_{IN} = V_{IH} or V_{IL}, $\overline{CE} = V_{IL}$, outputs open

AC CHARACTERISTICS ($V_{CC} = 5\text{ V} \pm 10\%$, $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	NOTE
Read cycle time	t_{RC}	100		ns	
Address access time	t_{AA}		100	ns	
Chip enable access time	t_{ACE}		100	ns	
Output enable delay time	t_{OE}		50	ns	
Output hold time	t_{OH}	5		ns	
CE to output in High-Z	t_{CHZ}		40	ns	1
OE to output in High-Z	t_{OHZ}		40	ns	

NOTE:

1. This is the time required for the outputs to become high-impedance.

AC TEST CONDITIONS

PARAMETER	RATING
Input voltage amplitude	0.4 V to 2.6 V
Input rise/fall time	10 ns
Input/output reference level	1.5 V
Output load condition	1TTL + 100 pF

CAUTION

To stabilize the power supply, it is recommended that a high-frequency bypass capacitor be connected between the V_{CC} pin and the GND pin.

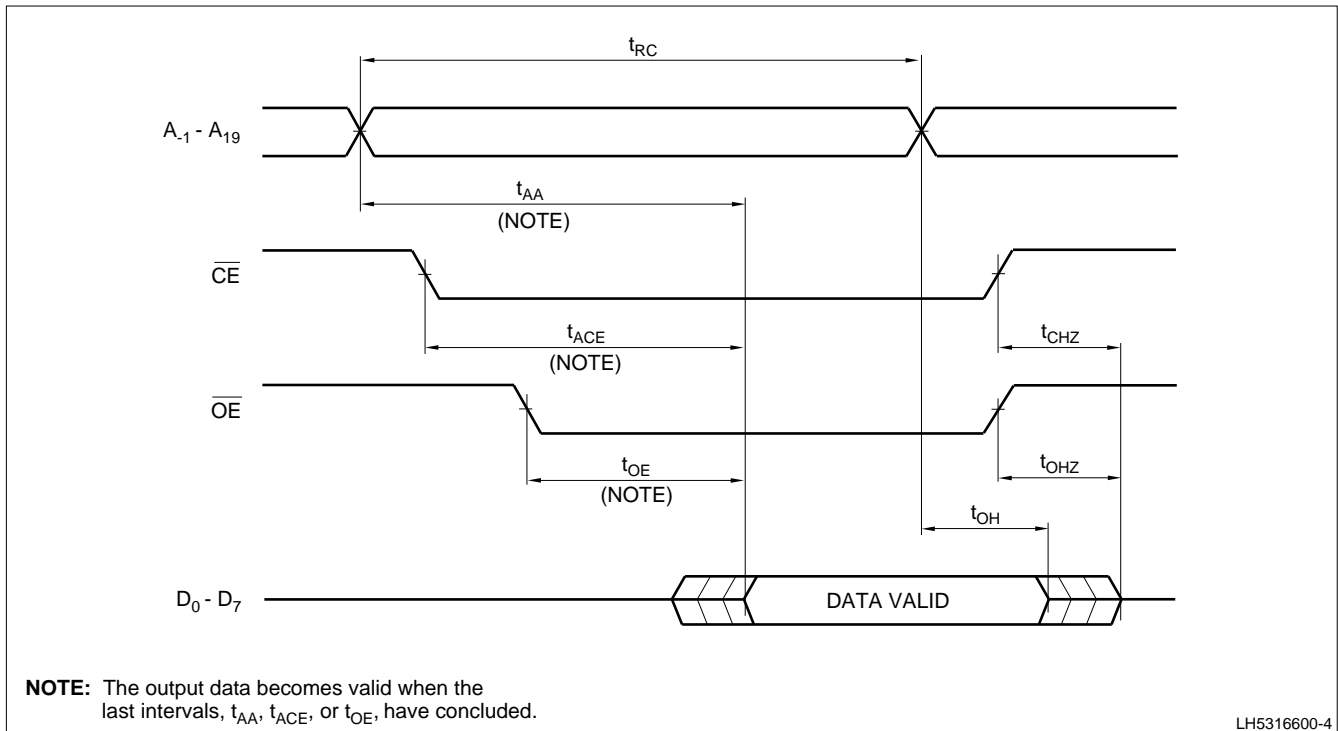


Figure 4. Byte Mode ($\overline{\text{BYTE}} = \text{VIL}$)



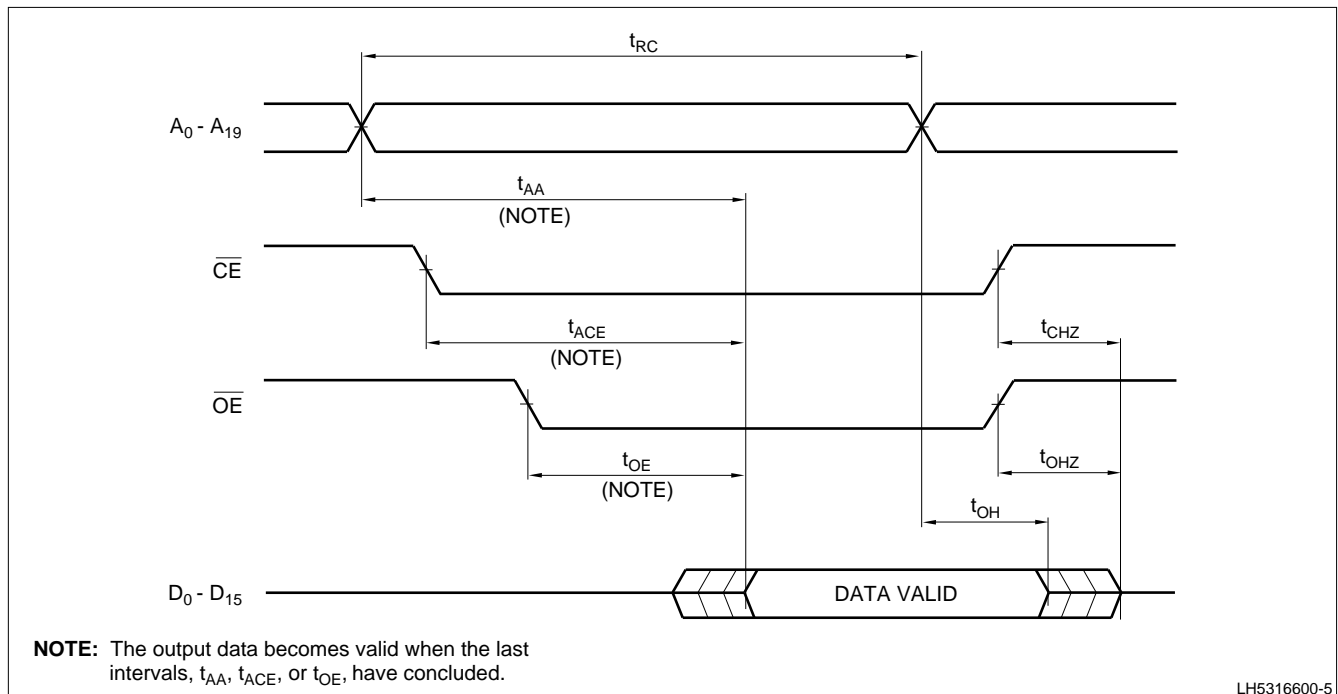


Figure 5. Word Mode ($\overline{\text{BYTE}} = \text{VIH}$)

PACKAGE DIAGRAMS

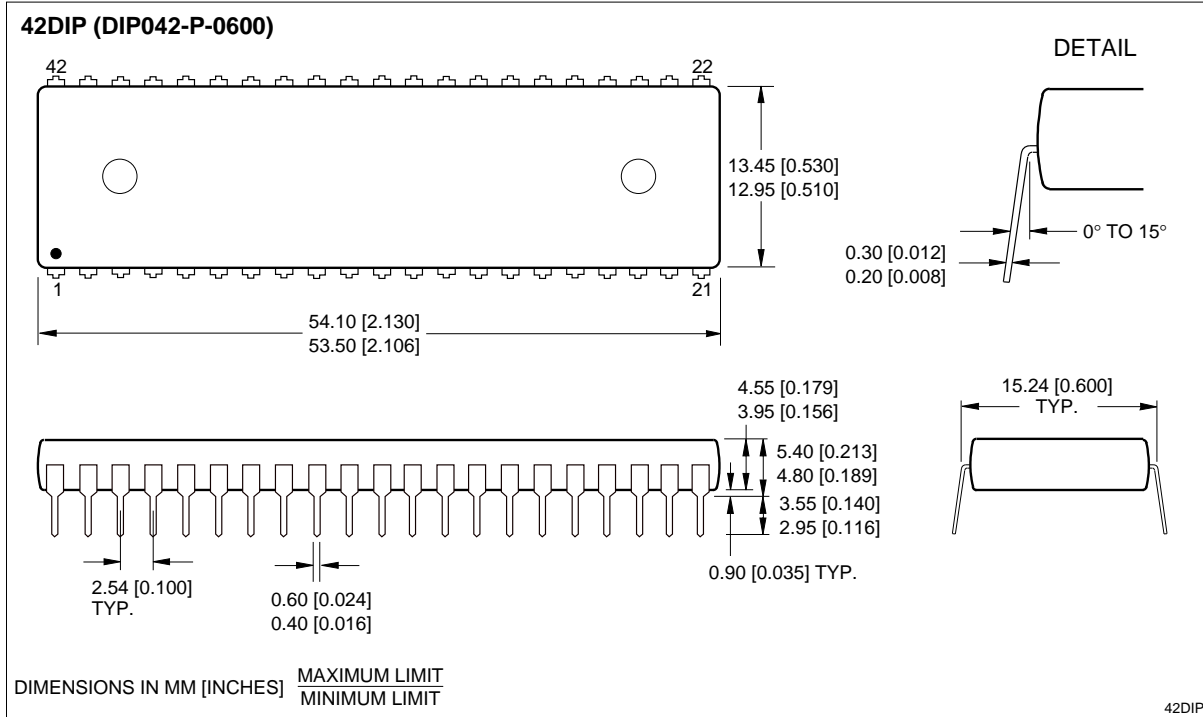

42-pin, 600-mil DIP

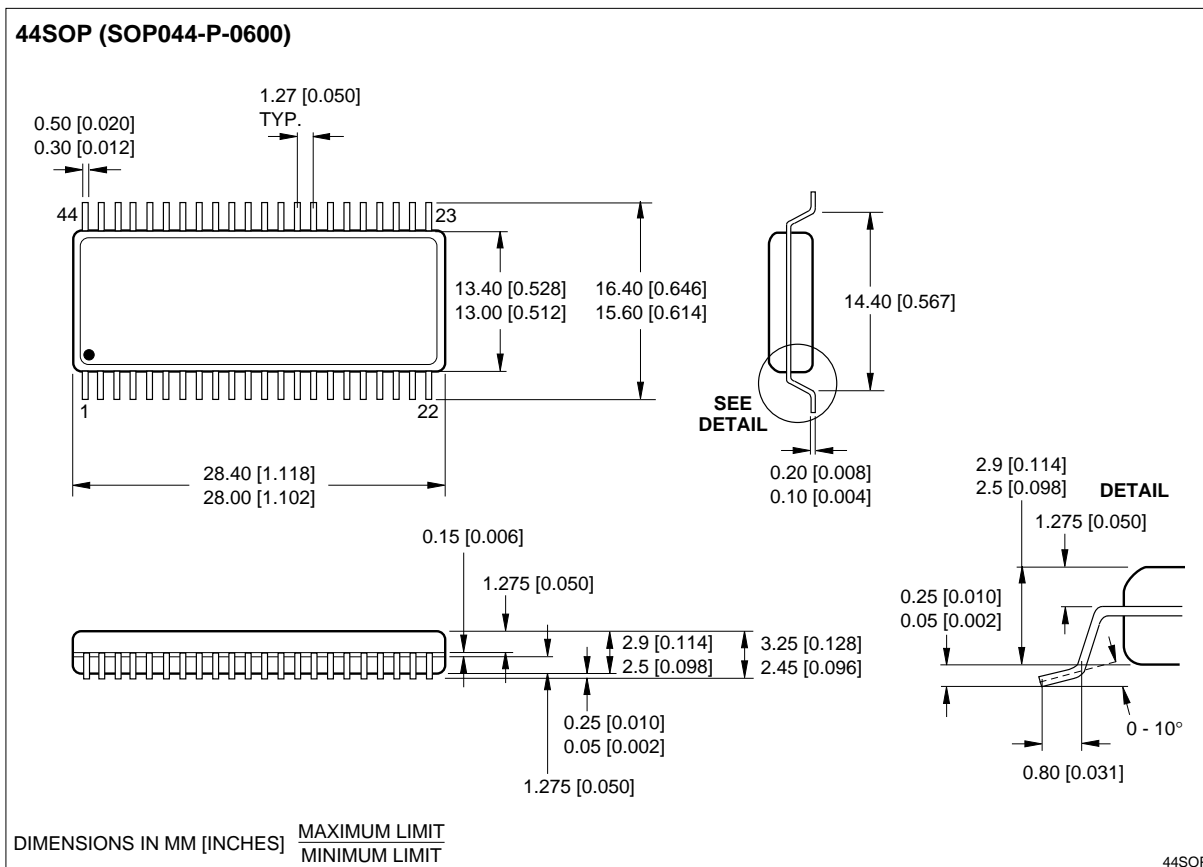

44-pin, 600-mil SOP

ORDERING INFORMATION

