

REARED BY : DATE

PPROVED BY : DATE

SHARP

LIQUID CRYSTAL DISPLAY GROUP
SHARP CORPORATION

SPECIFICATION

SPEC No. LD7505 B
FILE No.
ISSUE : May .12 .1995
PAGE : 17 pages
APPLICABLE GROUP
Liquid Crystal Display
Group

DEVICE SPECIFICATION FOR
TFT-LCD Module

MODEL No.

LQ10D341

•1 CUSTOMER' S APROVAL

DATE _____

BY _____

PRESENTED

BY

H. FUKUOKA

Department General Manager

Engineering Department 2

TFT LCD Development Center

LIQUID CRYSTAL DISPLAY GROUP

SHARP CORPORATION

RECORDS OF REVISION

LQ1OD341

1. Application

This specification applies to color TFT-LCD module, LQ 10D341.

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver ICs, control circuit and power supply circuit and a backlight unit. Graphics and texts can be displayed on a $640 \times 3 \times 480$ dots panel with 262,144 colors by supplying 18 bit data signal (6bit/color), four timing signals, +5V DC supply voltage for TFT-LCD panel driving and supply voltage for backlight.

The TFT-LCD panel used for this module is a low-reflection and higher-color-saturation type. Therefore, this module is also suitable for the multimedia use.

Optimum viewing direction is 9 o'clock.

Backlight-driving DC/AC inverter is not built in this module.

3. Mechanical Specifications

Parameter	Specifications	Unit
Display size	26 (10.4") Diagonal	cm
Active area	211.2(H) \times 158.4(V)	mm
Pixel format	640(H) \times 480(V)	pixel
	(1 pixel = R + G + B dots)	
Pixel pitch	0.330(H) \times 0.330(V)	μm
Pixel configuration	R,G,B vertical stripe	
Display mode	Normally white	
Unit outline dimensions *1	265.0(W) \times 195.0(H) \times 11.0(D)	mm
Mass	680 \pm 10	g
Surface treatment	Anti-glare and hard-coating 2H Haze value = 25=5%	

* 1. Note: excluding backlight cables.

Outline dimensions is shown in Fig. 1

4. Input Terminals

4-1. TFT-LCD panel driving

CN1 Usedcomector:DF9BA-31 P-IV (Hirose Electric Co., Ltd.)

CN 1 pin arrangement from module surface (Transparent view)

DF9A-31S-IV

DF9B-31S-1V

Pin No.	Symbol	Function	Remark
1	GND		
2	CK	Clock signal for sampling each data signal	
3	Hsync	Horizontal synchronous signal	【Note1】
4	Vsync	Vertical synchronous signal	【Note1】
5	GND		
6	R0	R E D data signal LSB)	
7	R1	R E D data signal	
8	R2	R E D data signal	
9	R3	R E D data signal	
10	R4	R E D data signal	
11	R5	R E D data signal(MSB)	
12	GND		
13	G0	G R E E N data signal(LSB)	
14	G1	G R E E N data signal	
15	G2	G R E E N data signal	
16	G3	G R E E N data signal	
17	G4	G R E E N data signal	
18	G5	G R E E N data signal(MSB)	
19	GND		
20	B0	B L U E data signal(LSB)	
21	B1	B L U E data signal	
22	B2	B L U E data signal	
23	B3	B L U E data sisal	
24	B4	B L U E data signal	
25	B5	B L U E data signal(MSB)	
26	GND		
27	ENAB	Signal to settle the horizontal display position	【Note2】
28	Vcc	+ 5 .0V power supply	
29	Vcc	+5 .0V power supply	
30	R/L	Horizontal display mode select signal	【Note3】
31	U/D	Vertical display mode select signal	【Note4】

※ The shielding case is connected with GND.

[Note] 1480 line, 400 line or 350 line mode

is selected by the polarity combination of the both synchronous signals,

Mode	480 lines	400 lines	350 lines
Hsync	negative	negative	positive
Vsync	negative	positive	negative

【Note2】The horizontal display start timing is settled in accordance with a rising timing of ENAB signal. In case ENAB is fixed "Low", the horizontal start timing is determined as described in 7-2. Don't keep ENAB 'High" during operation.

【Note 3】




display reverse

R/L=High . U/D=Low

R/L=Low \ U/D=Low

【Note 4】

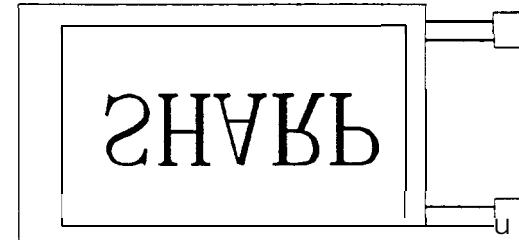

display reverse

R/L=High . U/D=Low

R/L=High , U/D=High

4-2. Backlight driving

Used connector : BHR-03VS- 1 (JST)

CN2 Corresponding connector:SM02(8.0)B-BHS(JST)

Pin no.	symbol	function
1	V _{HIGH}	Power supply for lamp (High voltage side)
2	NC	This is electrically opened.
3	V _{LOW}	Power supply for lamp (Low voltage side)

5. Absolute Maximum Ratings

Parameter	Symbol	Condition	Ratings	Unit	Remark
Input voltage	V _I	T _a =25°C	-0,3 ~ V _{cc} +0,3	V	【Note 11】
+5V supply voltage	V _{cc}	T _a =25 °C	0 ~ + 6	V	
Storage temperature	T _{stg}	-	-25 ~ +60	'C	【Note2】
Operating temperature (Ambient)	T _{opa}	-	0 ~ + 50	°C	

【Note1】CK,R0~R5,G0~G5,B0~B5,Hsync,Vsync,ENAB,R/L,U/D

【Note2】Humidity : 95%RH Max. at T_a ≤ 40°C.Maximum wet-bulb temperature at 39°C or less at T_a>40°C.

No condensation.


6. Electrical Characteristics

6-1. TFT-LCD panel driving


 $T_a = 25^\circ C$

Parameter	symbol	Min.	Typ.	Max.	unit	Remark
+5V supply voltage	V _{cc}	+4.5	+5.0	+5.5	V	[Note1]
Current dissipation	I _{cc}	—	280	450	mA	[Note2]
Permissive input ripple voltage	V _{RP}	—	—	100	mVp-p	V _{cc} =+5V
Input voltage (Low)	V _L	—	—	0.3V _{cc}	V	
Input voltage (High)	V _H	0.7V _{cc}	—	—	v	[Note3]
Input current ('low)	I _{OL1}	—	—	1.0	μA	V _T =0V [Note4]
	I _{OL2}	—	—	60.0	μA	V _T =0V [Note5]
Input current (High)	I _{OH1}	—	—	1.0	μA	V _T =V _{cc} [Note6]
	I _{OH2}	—	—	60.0	μA	V _T =V _{cc} [Note7]


[Note1]
V_{cc}-turn-on conditions

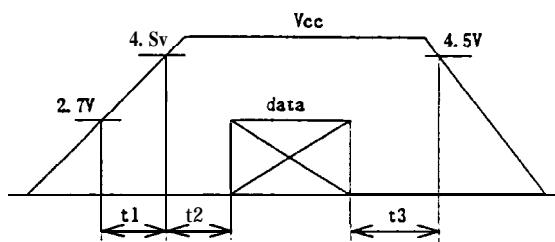 $t_1 \leq 10ms$ $0 < t_2 \leq 10ms$ $0 < t_3 \leq 1s$ V_{cc}-dip conditions

1) $2.7V \leq V_{cc} < 4.5V$
 $t_d \leq 10ms$

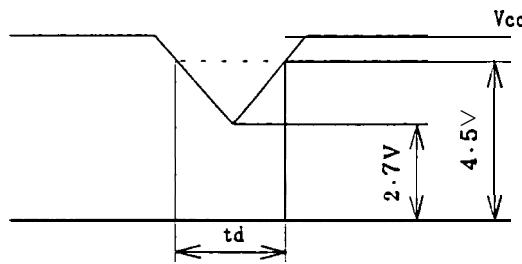2) $V_{cc} < 2.7V$ V_{cc}-dip conditions should also follow the V_{cc}-turn-on conditions**[Note2]** Typical current situation : 16-gray-bar pattern.

480 line mode

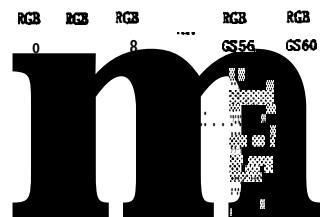
 $V_{cc}=+5.0V$ **[Note3]** CK,R0~R5,G0~G5,B0~B5,Hsync,Vsync,ENAB,R/L,U/D**[Note4]** CK,R0~R5,G0~G5,B0~B5,Hsync,Vsync,ENAB**[Note5]** R/L**[Note6]** CK,R0~R5,G0~G5,B0~B5,Hsync,Vsync**[Note7]** ENAB,U/D

6-2. Backlight driving

The-backlight **system** is an edge-lighting **type** with single CCFT (Cold Cathode Fluorescent Tube). The characteristics of single lamp are shown in the following table.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp current	I _L	2.5	4.2	6.0	mArms	[Note1]
Lamp power consumption	P _L	-	2.1	-	W	[Note2]
Lamp frequency	F _L	20	35	60	KHz	[Note3]
Kick-off voltage	V _s	-	-	1100	Vrms	T _a =25 °C
		-	-	1300	Vrms	T _a =0 °C [Note4]
Lamp life time	L _L	10000	-	-	hour	[Note5]

[Note1] Lamp current is measured with current meter for high frequency as shown below.

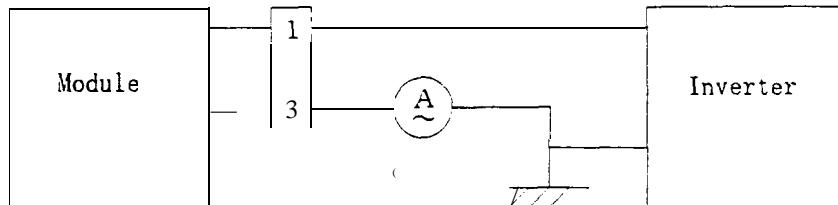

* 3pin is V_{LOW}

[Note2] At the condition of Y_L=200cd/m²

[Note3] Lamp frequency **may** produce interference with horizontal synchronous frequency, and this **may** cause beat on the display. Therefore lamp frequency shall be detached as much as possible from the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.

[Note4] The open output voltage of the **inverter** shall be maintained for more than 1 sec; otherwise the lamp may not be turned on.

[Note5] Lamp life time is defined that it applied either ① or ② under this condition
(Continuous turning on at T_a=25 °C, I_L=6.0mArms)

① **Brightness** becomes 50% of the original value under standard condition.

② Kick-off voltage at T_a=0 °C exceeds maximum value, 1300 Vrms.

Note) The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) **never** occur. when YOU confirm it, the module should be operated in the same condition as it is installed in your instrument.

7. Timing Characteristics of input signals

Timing diagrams of input signal are shown in Fig.2 -1-3.

7-1. Timing characteristics

Parameter		Symbol	Mode	Min.	Typ.	Max.	Unit	Remark
Clock	Frequency	in-c	all	—	25.18	28.33	MHz	
	High time	Tch	“	5	—	—	ns	
	Low time	Tcl	“	10	—	—	ns	
Data	Setup time	Tds	“	5	—	—	ns	
	Hold time	Tdh	“	10	—	—	ns	
Horizontal sync. signal	Cycle	TH	“	30.00	31.78	—	μs	
			“	750	800	900	clock	
	Pulse width	THp	“	2	96	200	clock	
Vertical sync. signal	Cycle	Tv	480	515	525	560	line	
			400	445	449	480	line	
			350	447	449	510	line	
	Pulse width	TVp	all	1	—	34	line	
Horizontal display period		THd	“	640	640	640	clock	
Hsync-Clock phase difference		THc	“	10	—	Tc-10	ns	
Hsync-Vsync phase difference		TVh	“	0	—	TH-THp	clock	

Note) In case of lower frequency, the deterioration of display quality, flicker etc. ,may be occurred.

7-2. Horizontal display position

The horizontal display position is determined by ENAB signal and the input data corresponding to the rising edge of ENAB signal is displayed at the left end of the active area.

Parameter		symbol	Min.	Typ.	Max.	Unit	Remark
Enable signal	Setup time	Tes	5	—	Tc-10	ns	
	Pulse width	Tep	2	640	640	clock	
Hsync-Enable signal phase difference		THE	44	—	164	clock	

Note) When ENAB is fixed "Low", the display starts from the data of C104(clock) as shown in Fig.2- 1-3. Be careful that the module does not work when ENAB is fixed "High".

7-3. Vertical display position

The vertical display position is automatically centered in the active area at each mode of VGA ,480 -,400 -,and 350-line mode . Each mode is selected depending on the polarity of the synchronous signals described in 4-1 (Note1).

In each mode ,the data of TVn is displayed at the top line of the active area. And the display position will be centered on the screen like the following figure when the period of vertical synchronous signal,TV, is typical value.

In 400-, and 350-line mode, the data in the vertical data invalid period is also displayed, So ,inputting all data "O" is recommended during vertical data invalid period.


ENAB signal has no relation to the vertical display position.

mode	V-data start(TVs)	V-data period(TVd)	V-display start(TVn)	V-display period	unit	Remark
480	34	480	34	480	line	
400	34	400	443-TV	480	line	
350	61	350	445-TV	480	line	

The diagram illustrates the timing of video signals. It shows two main sections: 400 lines mode (TV=449) and 350 lines mode (TV=449). Each section contains three horizontal bars representing the vertical timing. The top bar is labeled 'data invalid period'. The middle bar is labeled 'data period' and contains a vertical dashed line indicating the center of the active display area. The bottom bar is labeled 'data invalid period'. In the 400 lines mode diagram, the middle bar is divided into four segments labeled '4 0 lines' vertically. In the 350 lines mode diagram, the middle bar is divided into six segments labeled '6 5 lines' vertically. The entire width of the middle bar is labeled '4 00 lines' horizontally. The entire height of the middle bar is labeled '3 5 0 lines' horizontally. The entire height of the middle bar is labeled '65 lines' horizontally.

7-4. Input Data Signals and Display Position on the screen

Display position of input data(480 lines mode)
(H. V)

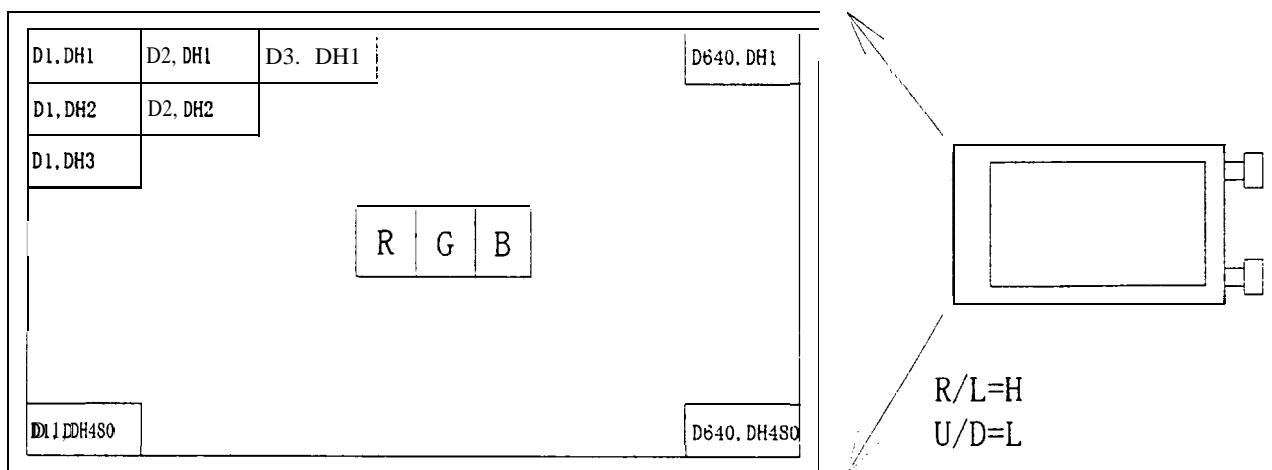

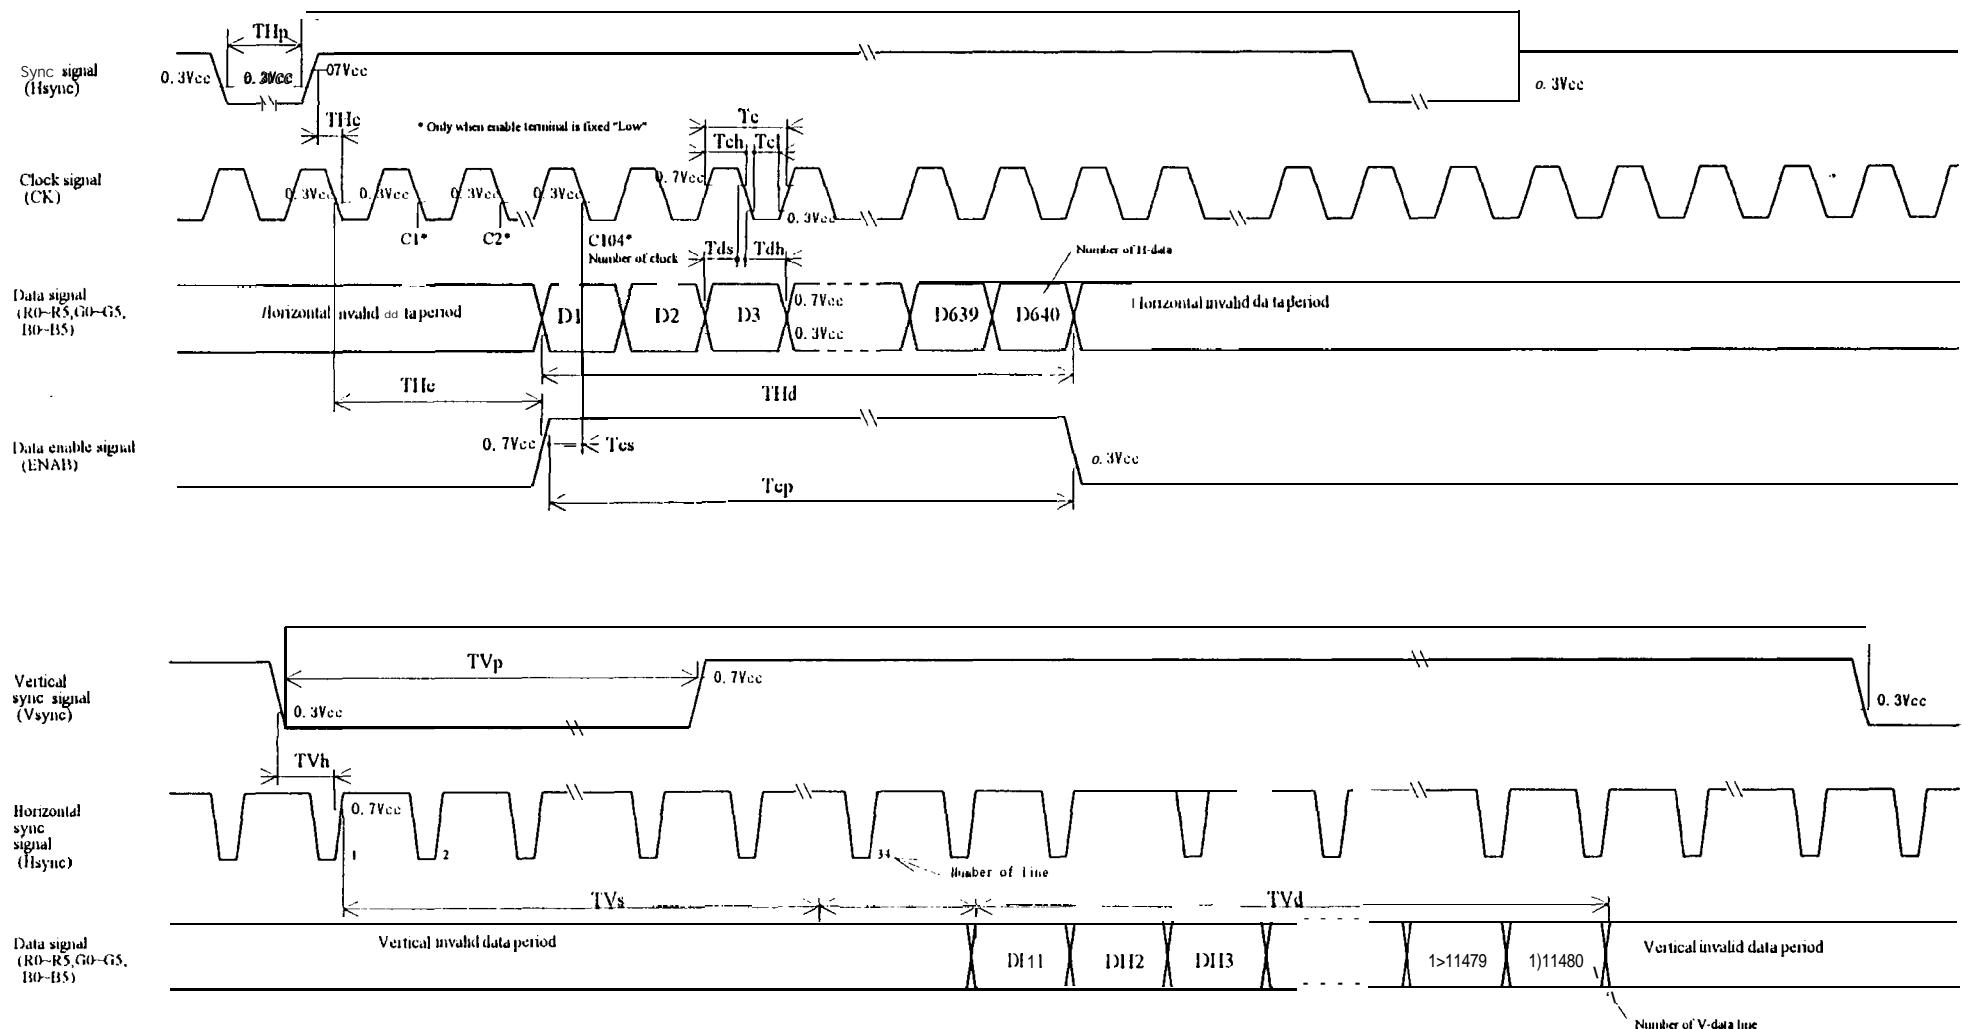


Fig 2-1 Input signal waveforms (480 line mode)

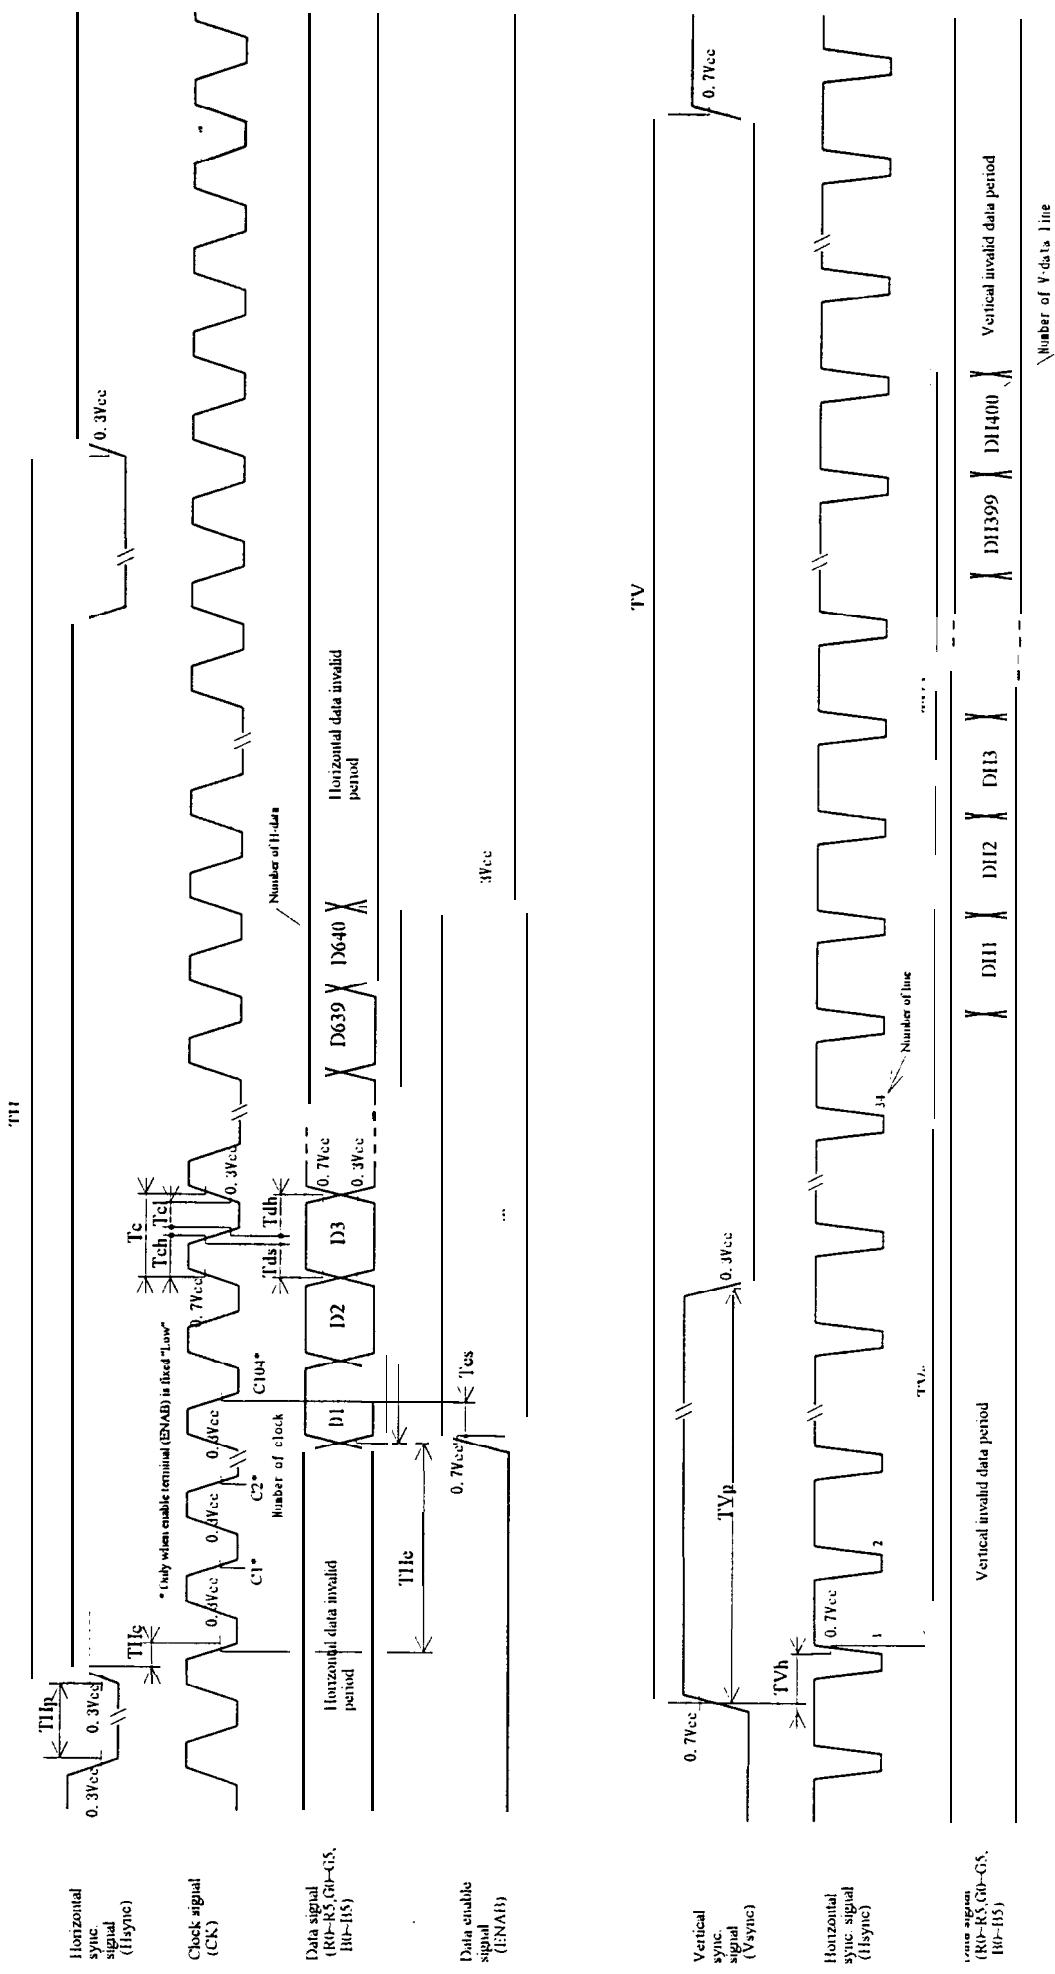


Fig.2-2 Input signal waveforms (400 line mode)

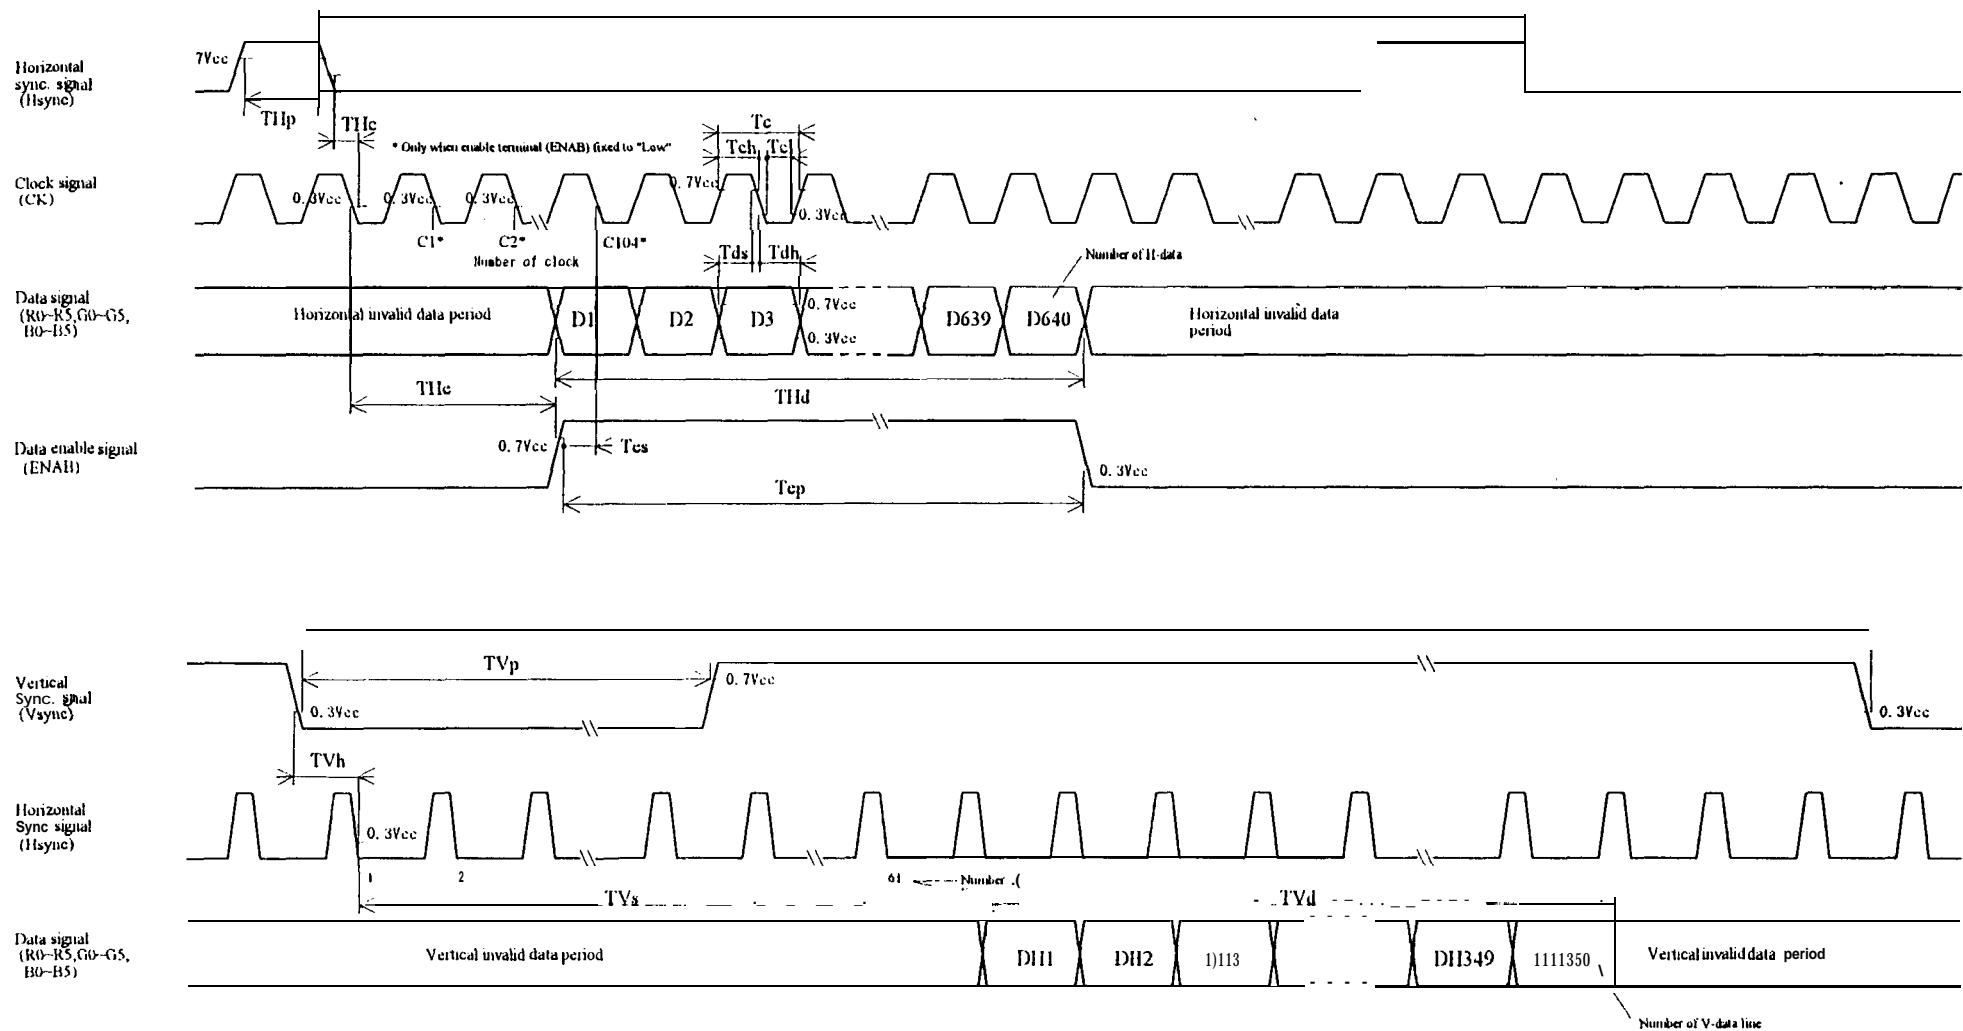


Fig.2-3 Input signal waveforms (350 line mode)

8. Input Signals. Basic Display Colors and Gray Scale of Each Color

Colors & ray scale		Data signal																		
		GrayScale	RO	RI	R2	R3	R4	R5	GO	G1	G2	G3	G4	G5	BO	B1	B2	B3	B4	B5
Basic color	Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	-	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	-	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	"	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	-	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	-	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	-	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of red	Black	GSO	0	0	0	0	0	0	0	0	0	0	0	0	()	()	()	()	()	()
	↑	GS1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	1	0	0	0	0	0	0	0	0	0	0	()	()	()	()	()	()
	0	↓		↓						↓					↓					
	↓	↓		↓						↓					↓					
	Brighter	GS61	1	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0
	0	GS62	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0
	Red	GS63	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of green	Black	GSO	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	0	1	0	0	0	0	0	()	()	()	()	()
	Darker	GS2	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	↑	↓		↓						↓					↓					
	↓	↓		↓						↓					↓					
	Brighter	GS61	0	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0
	↓	GS62	0	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0
	Green	GS63	0	0	0	0	0	0	0	1	1	1	1	1	1	()	()	()	0	0
Gray Scale of blue	Black	GSO	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	↑	↓		↓						↓					↓					
	0	↓		↓						↓					↓					
	Brighter	GS61	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1
	↓	GS62	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1
	Blue	GS63	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1

0 :Low level voltage, 1: High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. According to the combination of total 18 bit data signals, the 262, 144-color display can be achieved on the screen

9. Optical Characteristics

 $T_a=25^\circ C, V_{CC}=+5V$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	Vertical	CR>10	35	—	—	Deg.	[Note1,4]
	Horizontal		10	—	—	Deg.	
	e 22		30	—	—	Deg.	
Contrast ratio	C R	$\theta = 0^\circ$	100	—	—		[Note2,4]
Response time	R i s e		—	30	—	m s	[Note3,41]
	Decay		—	50	—	m s	
Chromaticity of white	X		—	0.313	—		[Note4]
	Y		—	0.329	—		
Luminance of white	Y_{L1} [Note4]	160	200	—	cd/m ²	$I_L=4.2mArms$	
White Uniformity	δ_w	—	—	1.45	—		[Note5]

※The measurement shall be executed 30 minutes after lighting at rating. (typical condition: $I_L=4.2mArms$)

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.3 below.


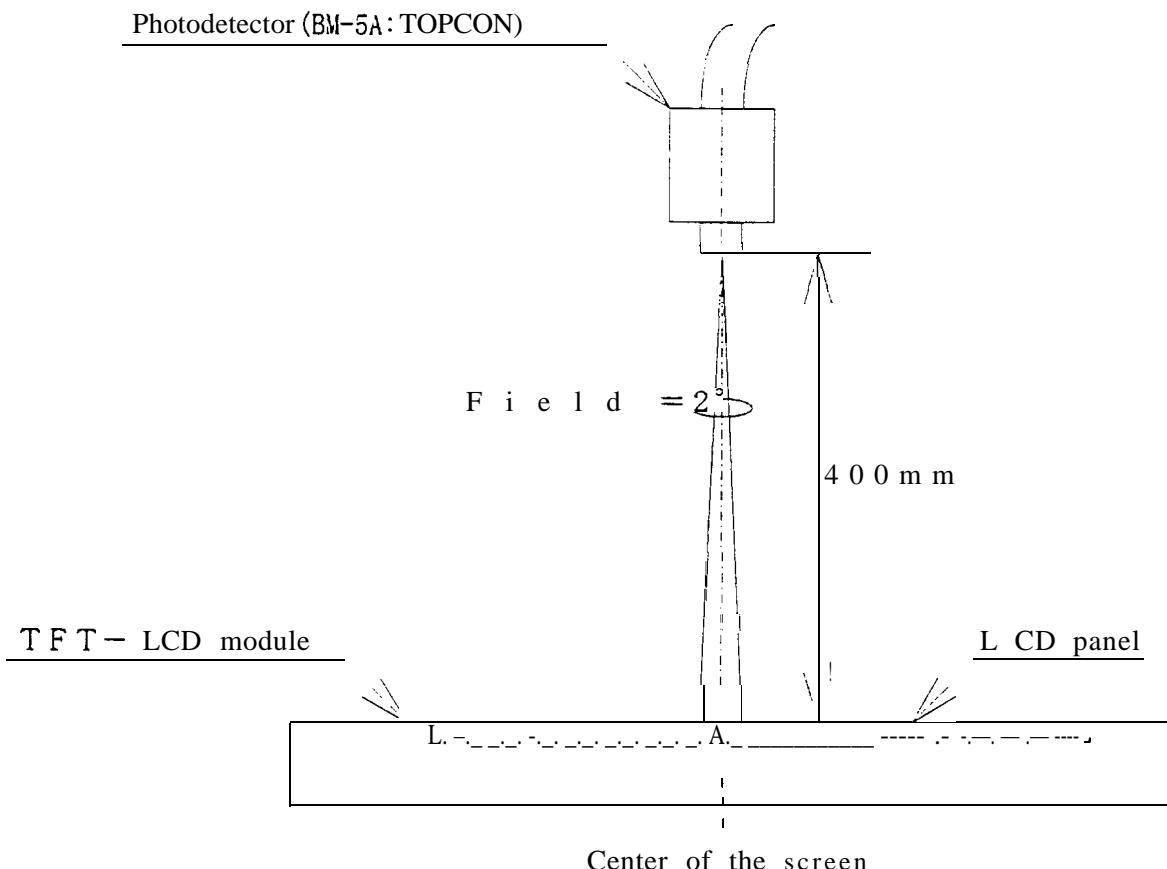


Fig. 3 Optical characteristics measurement method

[Note1] Definitions of viewing angle range:

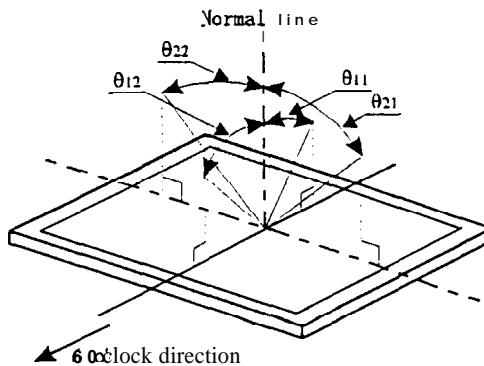


[Note2] Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

[Note3] Definition of response time:


The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white"

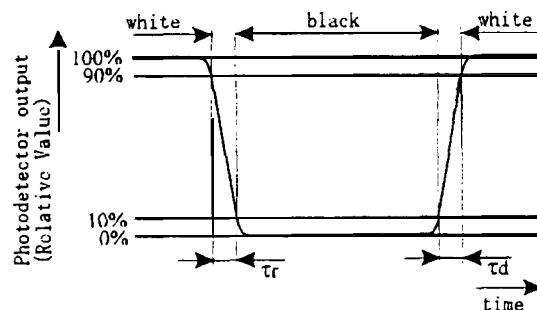

[Note4] This shall be measured at center of the screen.

[Note5] Definition of white uniformity:

White **uniformity** is defined as the following with five measurements (A~E).

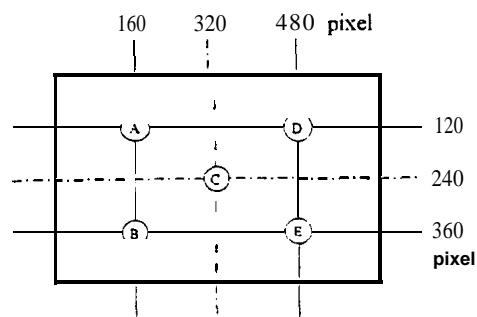

$$\delta_w = \frac{\text{Maximum Luminance of five points (brightness)}}{\text{Minimum Luminance of five points (brightness)}}$$

10. Display Quantity

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standard.

11. Handling Precautions

- a) Be **sure** to turn off the power supply when inserting or disconnecting the cable.
- b) Be sure to design the cabinet so that the module can be installed without **any** extra stress such as **warp or twist**.
- c) Since the front polarizer is easily damaged, pay attention not to scratch it.
- d) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
Handle with care.
- g) Since CMOS LSI is used in this module, take care of static electricity and injure the human earth when handling.
- h) Observe all other **precautionary** requirements in handling components.
- i) This module has its **circuitry PCBs** on the rear side and should be **carefully** handled in order not to be stressed.
- j) Laminated film is attached to the module surface to prevent it from being scratched. Peel the film off slowly, just before the use, **with** strict attention to electrostatic charges. Ionized air shall be blown over during the action. **Blow off** 'dust' on the polarizer **by** using an ionized nitrogen gun, etc.

12. Packing form

- a) Piling number of cartons : MAX. 7
- b) Package **quantity** in one carton : 10pts
- c) Carton size : 460(W) × 300(D) × 380(H)mm
- d) Total mass of 1 carton tilled with fill modules : 8750g

Packing form is shown in Fig.4

13. Reliability test items


No.	Test item	Conditions
1	High temperature storage test	Ta=60°C 240h
2	Low temperature storage test	Ta=-25°C 240h
3	High temperature & high humidity operation test	Ta=40°C ; 95%RH 240h (No condensation)
4	High temperature operation test	Ta=50°C 240h
5	Low temperature operation test	Ta=0°C 240h
6	Vibration test (non-operating)	Frequency : 10~57Hz/Vibration width (one side) :0.075mm : 58~500Hz/Gravity:9.8m/s ² Sweep time :11 minutes Test period :3 hours (1 hour for each direction of X,Y,Z)
7	Shock test (non-operating)	Max. gravity :490m/s ² Pulse width :1 ms, half sine wave Direction : ±X,±Y,±Z once for each direction.

[Result Evaluation Criteria]

Under the display **quality** test conditions with normal operation state, these shall be no change which may affect practical display fiction.

14. Others

1) Lot No. Label:

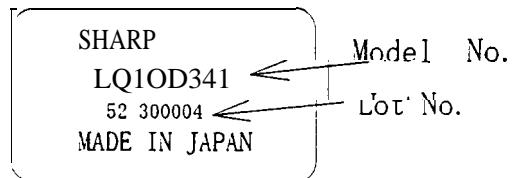

- 2) Adjusting volume have been set optimally before shipment, so do not change **any** adjusted value.
If adjusted value is changed, the specification may not be satisfied.
- 3) Disassembling the module can cause permanent damage and should be strictly avoided.
- 4) Please be careful since **image** retention **may** occur when a **fixed** pattern is displayed for a long time
- 5) If **any** problem occurs in relation to the description of this specification , it shall be resolved through discussion with spirit of cooperation.


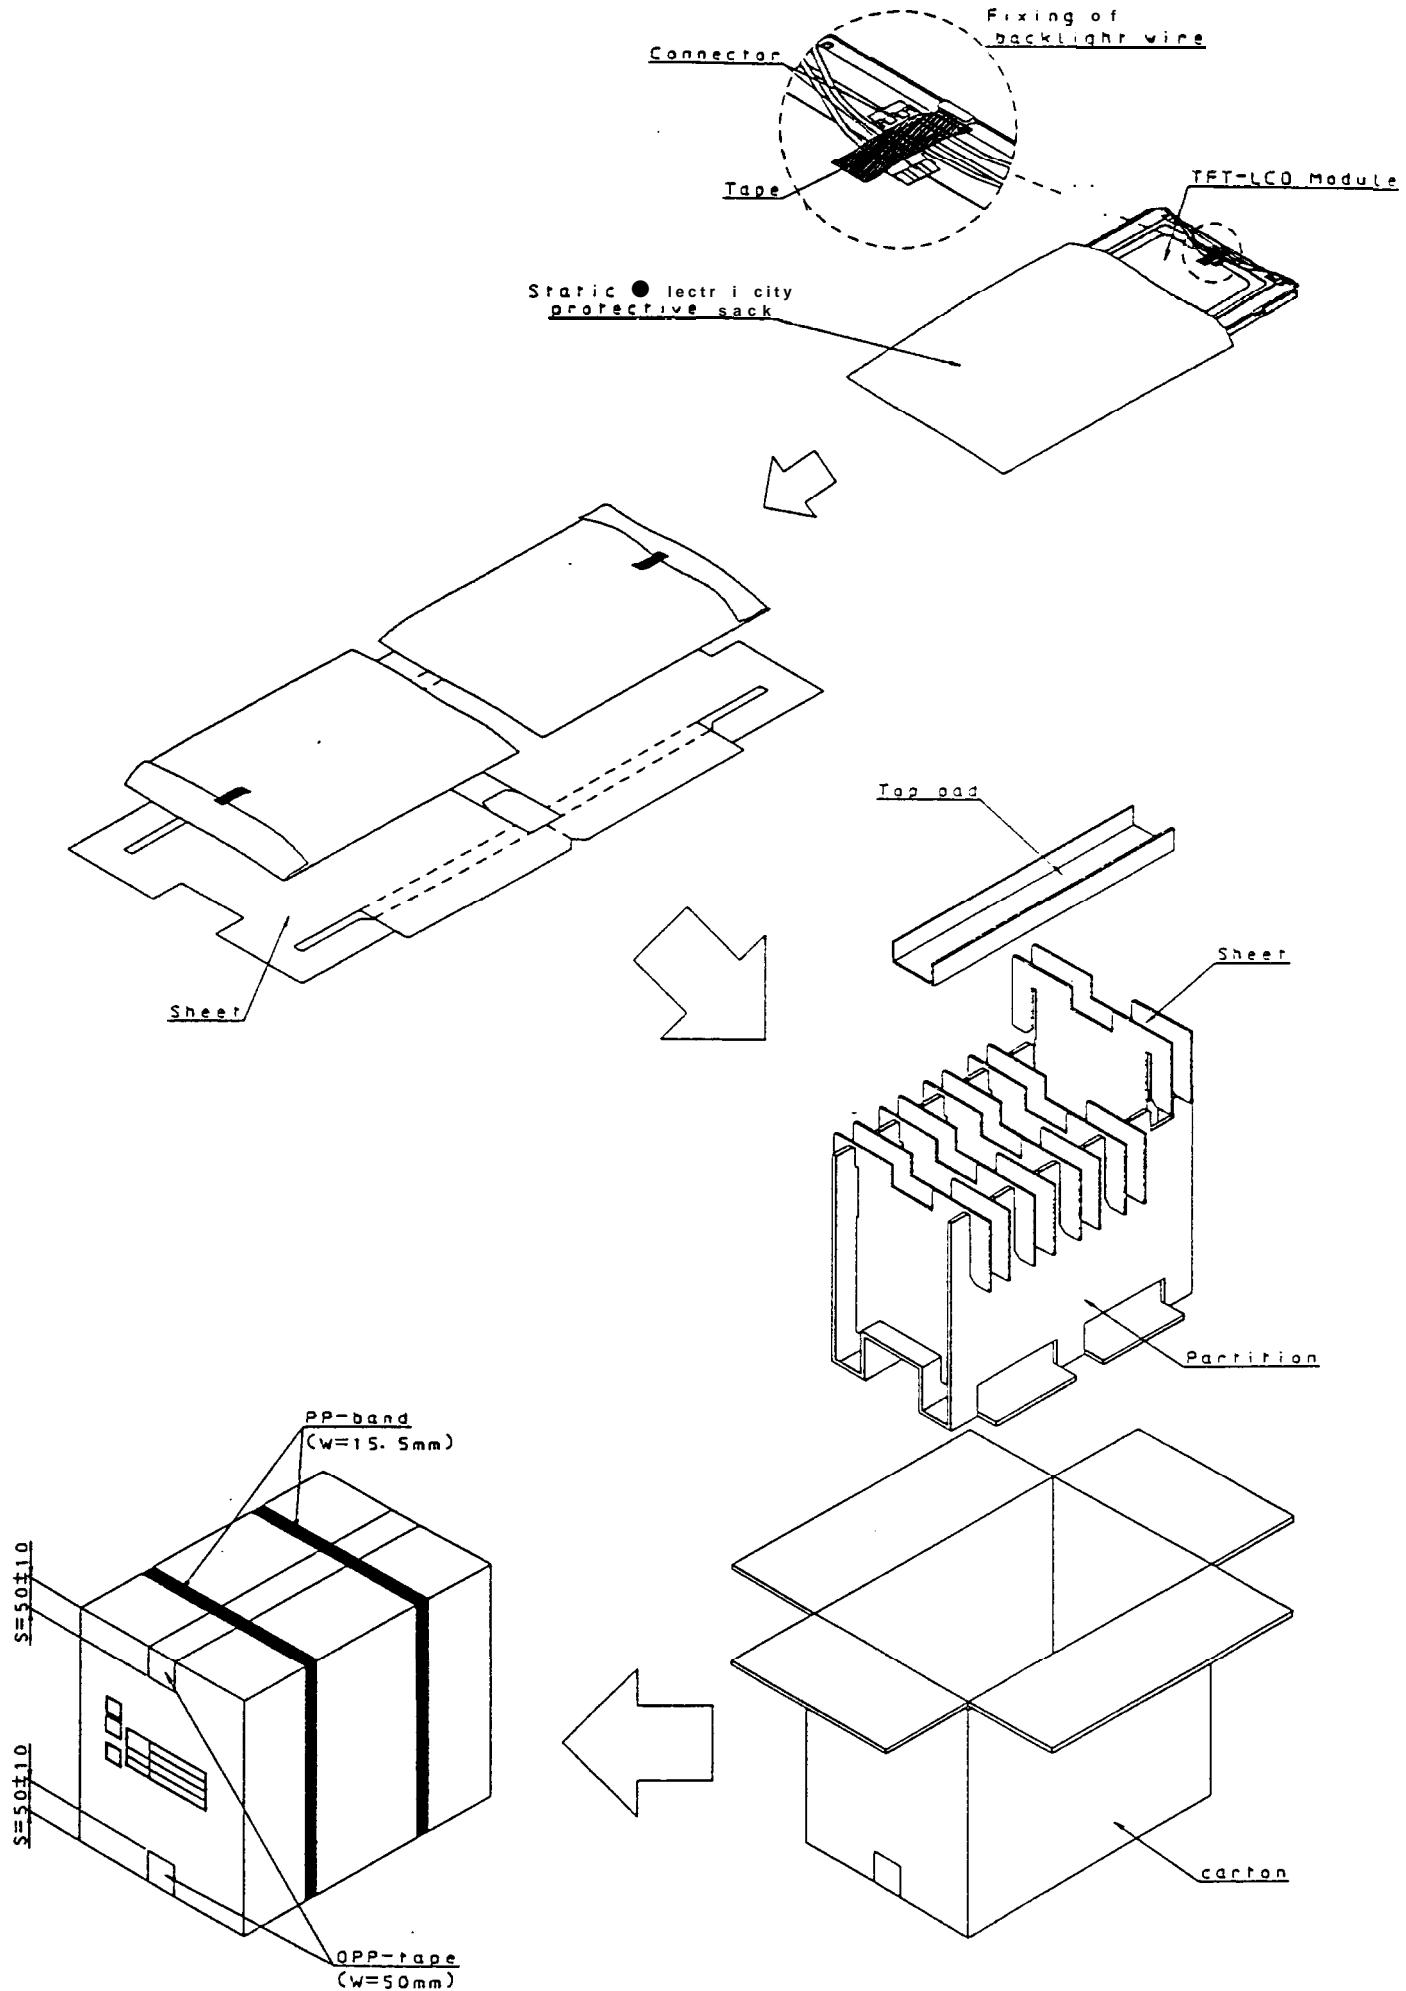


Fig 4 , Packing form

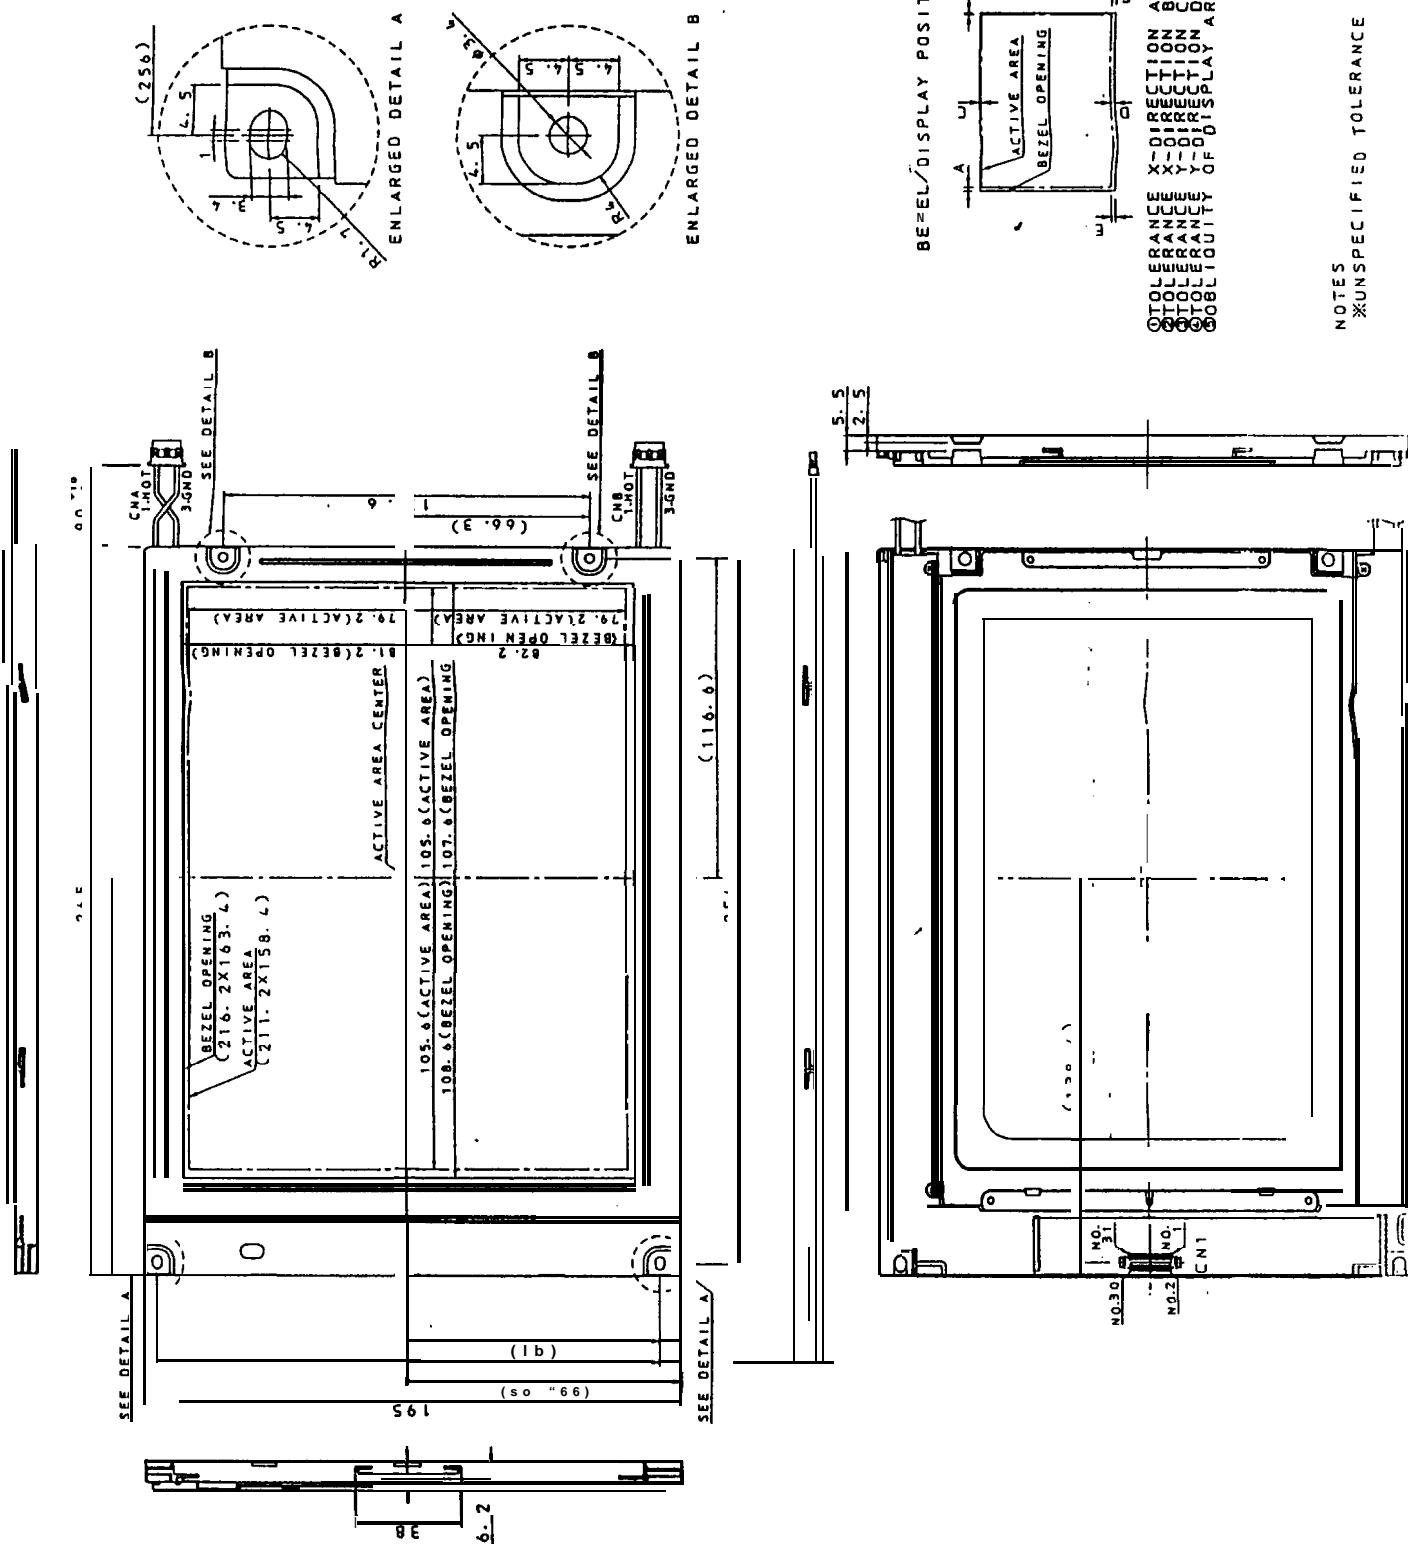

NOTES **X** UNSPECIFIED TOLERANCE TO BE ± 0.5

F G L 0 0 0 3 4 OUTLINE DIMENSIONS