

GL8□□5 Series

Rectangle type Dichromatic LED Lamps

Model No.

GL8ED5 Yellow-green
Red
GL8HP5 Yellow
Red


GaP
GaAsP/GaP
GaAsP/GaP
GaP

Features

- 1.9mm × 3.9mm rectangle type all resin mold
- Radiation color
GL8ED5 : Red, yellow-green and orange (mixed color)
GL8HP5 : Red, yellow and orange (mixed color)
- Milky diffusion lens type

Outline Dimensions

(Unit: mm)

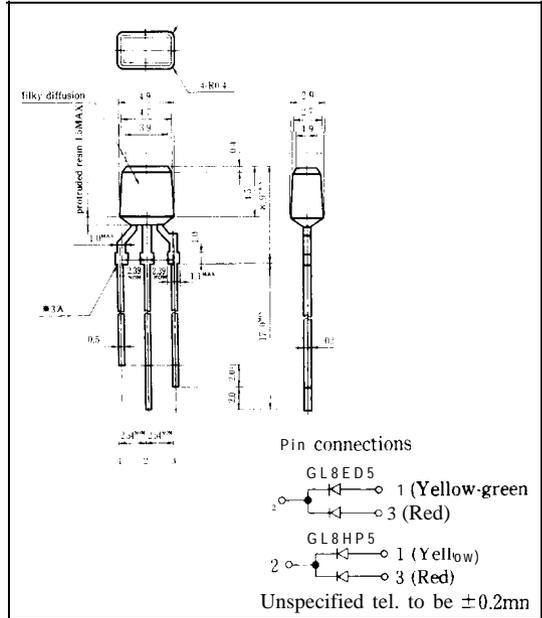

Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	GL8ED5		GL8HP5		Unit
		Yellow-green	Red	Yellow	Red	
*1 Power dissipation	P	84	84	50	35	mW
Continuous forward current	I _F	30	30	20	15	mA
*2 Peak forward current	I _{FM}	50	50	50	50	mA
Derating factor	DC	—	0.40	0.27	0.20	mA/°C
	Pulse	—	0.67	0.67	0.67	mA/°C
Reverse voltage	V _R	5		5		v
Operating temperature	T _{opr}	-25 to +85				°C
Storage temperature	T _{stg}	-25 to +100				°C
*3 Soldering temperature	T _{sol}	260 (within 5 seconds)				°C

*1 The value of power dissipation is specified under the condition that either yellow-green or red/yellow or red is lightened separately. When the both diodes of yellow-green and red/yellow or red are lightened simultaneously, the power dissipation of each diode should be less than the half of the value specified in this table.

*2 Duty ratio = 1/10, Pulse width = 0.1ms

*3 At the (A) position of above outline dimensions



GL8ED5 (Yellow-green/Red)

■ Electro-optical Characteristics

(Ta = 25°C)


Parameter	Symbol	Radiation color	Conditions	MIN.	TYP.	MAX.	Unit
Forward voltage	V _F	Yellow-green	I _F = 20mA	—	2.1	2.8	V
		Red	I _F = 20mA	—	2.0	2.8	
*4 Luminous intensity	I _v	Yellow-green	I _F = 20mA	4.0	10	—	mcd
		Red	I _F = 20mA	2.5	6.0	—	
Peak emission wavelength	λ _p	Yellow-green	I _F = 20mA	—	565	—	‘m
		Red	I _F = 20mA	—	635	—	
Spectrum radiation bandwidth	Δλ	Yellow-green	I _F = 20mA	—	30	—	‘m
		Red	I _F = 20mA	—	35	—	
Reverse current	I _R	Yellow-green	V _R = 4V	—	—	10	μA
		Red	V _R = 4V	—	—	10	
Terminal capacitance	C _t	Yellow-green	V = 0V f = 1 MHz	—	35	—	‘F
		Red	V = 0V f = 1 MHz	—	20	—	
Response frequency	f _c	Yellow-green	—	—	4	—	‘Hz
		Red	—	—	4	—	

*4 Tolerance: ±30%

■ Characteristics Diagrams


Forward Current vs. Forward Voltage

(Ta = 25°C)

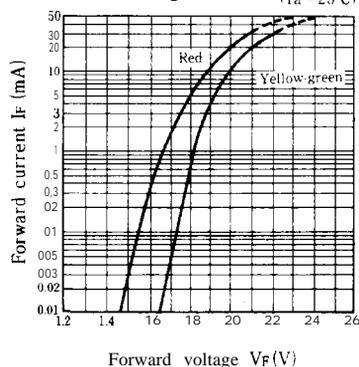


Luminous Intensity vs. Forward Current

(Ta = 25°C)

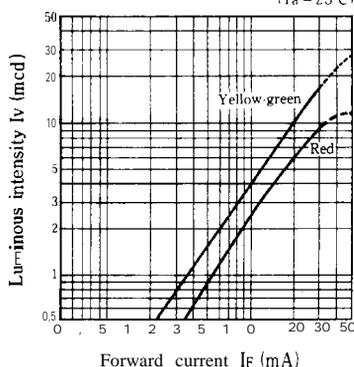


Forward Current Derating Curve

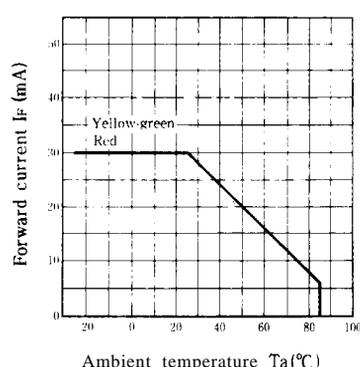


Relative Luminous Intensity vs. Ambient Temperature

(I_F = 20mA)

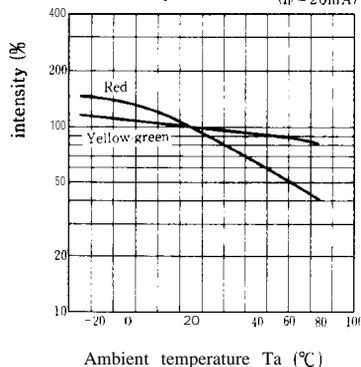

Spectrum Distribution

(Ta = 25°C)

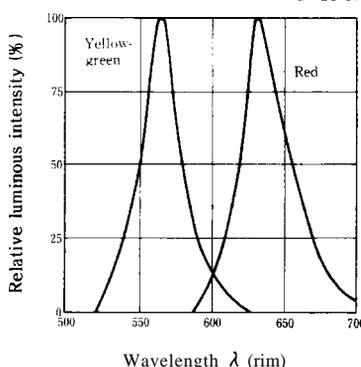

GL8HP5 (Yellow/Red)

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter	Symbol	Radiation color	Conditions	MIN.	TYP.	MAX.	Unit
Forward voltage	V _F	Yellow	I _F = 10mA	—	1.9	2.5	V
		Red	I _F = 10mA	—	2.0	2.4	
※4 Luminous intensity	I _v	Yellow	I _F = 10mA	1.0	3.0	—	mcd
		Red	I _F = 10mA	0.5	1.5	—	
Peak emission wavelength	λ _p	Yellow	I _F = 10mA	—	585	—	‘m
		Red	I _F = 10mA	—	695	—	
Spectrum radiation bandwidth	Δλ	Yellow	I _F = 10mA	—	30	—	‘m
		Red	I _F = 10mA	—	100	—	
Reverse current	I _R	Yellow	V _R = 4V	—	—	10	μA
		Red	V _R = 4V	—	—	10	
Terminal capacitance	C _t	Yellow	V = 0V f = 1 MHz	—	35	—	pF
		Red	V = 0V f = 1 MHz	—	55	—	
Response frequency	f _c	Yellow	—	—	4	—	MHz
		Red	—	—	4	—	


※4 Tolerance: ±30%

3

■ Characteristics Diagrams


Forward Current vs. Forward Voltage

(Ta = 25°C)

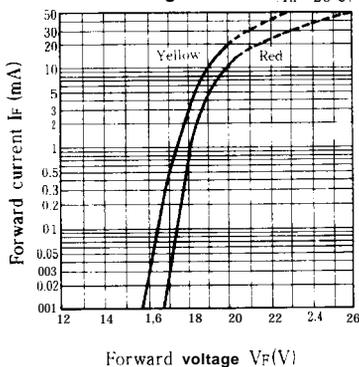


Luminous Intensity vs. Forward Current

(Ta = 25°C)

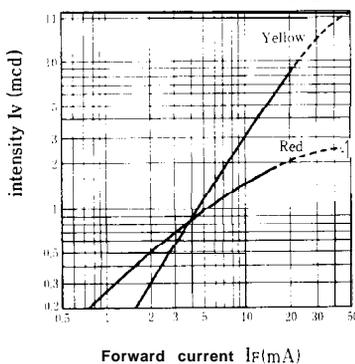


Forward Current Derating Curve

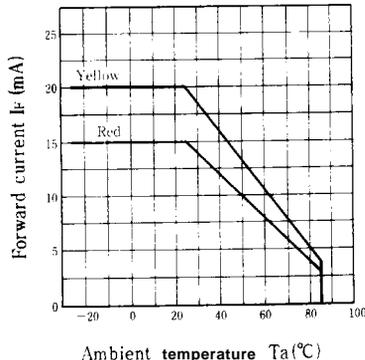

Relative Luminous Intensity vs. Ambient Temperature

(If = 10mA)

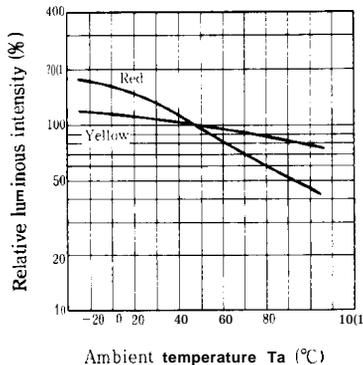

Spectrum Distribution

(Ta = 25°C)

