

# S11MS7

**High Speed/ High Noise-resistance Type Phototriac Coupler**

## ■ Features


1. High speed ( $t_{on}$  : MAX. 15  $\mu$ s)
2. High noise resistance  
(dV/dt : MIN. 500V/ $\mu$ s)
3. Low trigger current ( $I_{FT}$  : MAX. 5mA)
4. Mini-flat package type
5. Recognized by UL, file No. E64380

## ■ Applications

1. For triggering medium/high power triac

## ■ outline Dimensions

(Unit : mm)

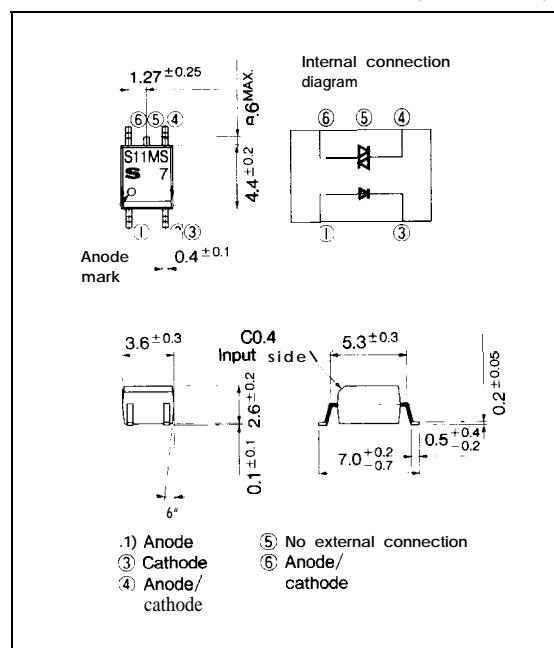

## ■ Absolute Maximum Ratings



(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	Reverse voltage	V <sub>R</sub>	6	V
output	*1 RMS ON-state current	I <sub>T</sub>	0.05	A <sub>rms</sub>
	Peak one cycle surge current	I <sub>surge</sub>	0.6	A
	Repetitive peak OFF-state voltage	V <sub>DRM</sub>	400	V
*isolation voltage		V <sub>iso</sub>	2500	V <sub>rms</sub>
Operating temperature		T <sub>opr</sub>	-30 to +100	°C
Storage temperature		T <sub>stg</sub>	-40 to +125	°C
*3 Soldering temperature		T <sub>sol</sub>	260	°C

\*1 The definition of conduction angle  $\theta$  of effective on current It should be as shown in the right drawing.

\*2 40 to 60%RH, AC for 1 minute, f=60Hz

\*3 For 10 seconds

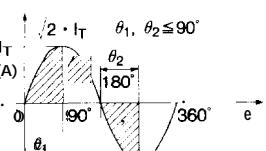


## ■ Electro-optical Characteristics


(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 20mA		1.2	1.4	v
	Reverse current	I <sub>R</sub>	V <sub>R</sub> = 3V	—	10	μA	
Output	Repetitive peak OFF-state current	I <sub>DRM</sub>	V <sub>DRM</sub> = Rated	—	—	—	μA
	ON-state voltage	V <sub>T</sub>	I <sub>T</sub> = 0.05A	—	1.3	2.5	v
Transfer characteristics	Holding current	I <sub>H</sub>	V <sub>D</sub> = 6V	—	0.5	3.5	mA
	Critical rate of rise of OFF-state voltage	dV/dt	V <sub>DRM</sub> = (1/√2) . Rated	500	—	—	V/μs
	Minimum trigger current	I <sub>FT</sub>	V <sub>D</sub> = 6V, R <sub>L</sub> = 100Ω	—	5	mA	
	Isolation resistance	R <sub>ISO</sub>	DC = 500V, 40 to 60%RH	5 × 10 <sup>10</sup>	10 <sup>11</sup>	—	Ω
	Turn-on time	t <sub>on</sub>	V <sub>D</sub> = 6V, R <sub>L</sub> = 100Ω, I <sub>F</sub> = 20mA	—	10	15	μs


**Fig. 1 RMS ON-state Current vs. Ambient Temperature**

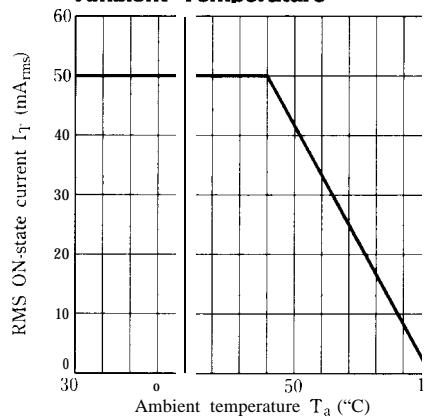


**Fig. 2 Forward Current va. Ambient Temperature**

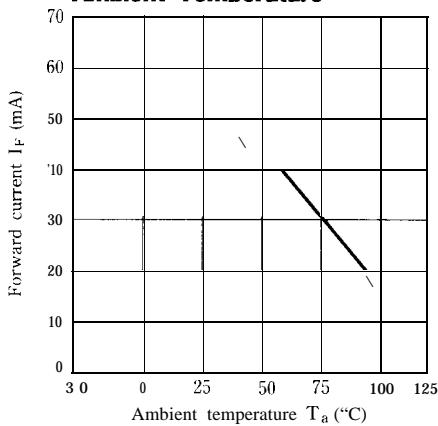


**Fig. 3 Forward Current va. Forward Voltage**

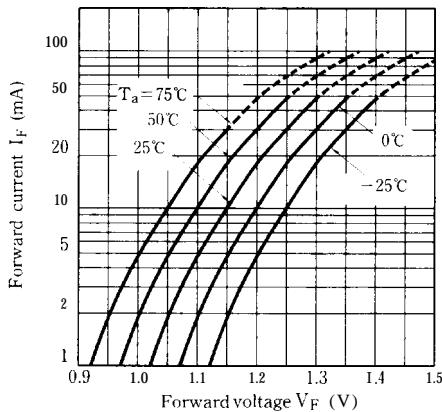


**Fig. 4 Minimum Trigger Current vs. Ambient Temperature**

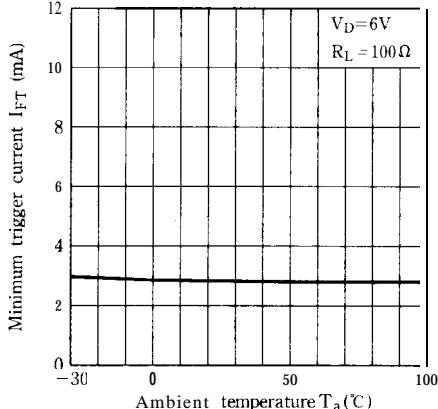


**Fig. 5 Relative Repetitive Peak OFF-state Voltage vs. Ambient Temperature**

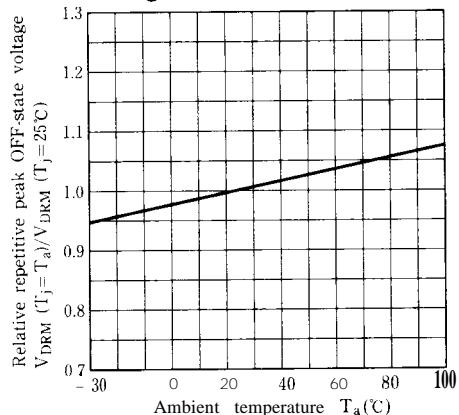


**Fig. 7 Holding Current vs. Ambient Temperature**

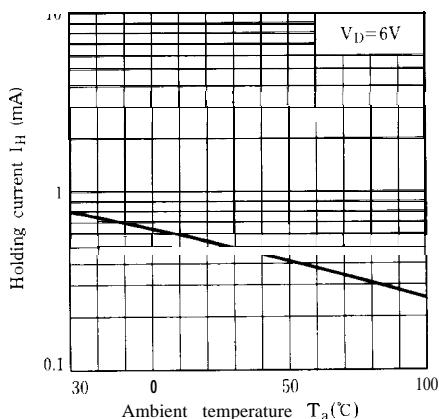


**Fig. 9 Relative Repetitive Peak OFF-state Current vs. Ambient Temperature**

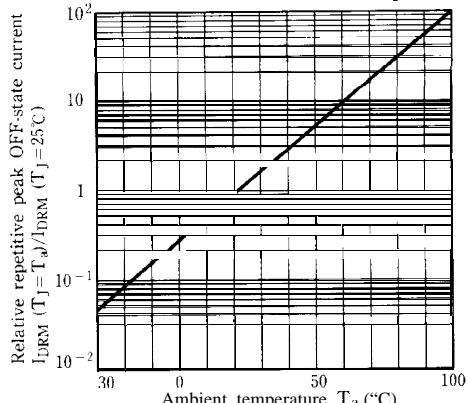


**Fig. 6 ON-state Voltage vs. Ambient Temperature**

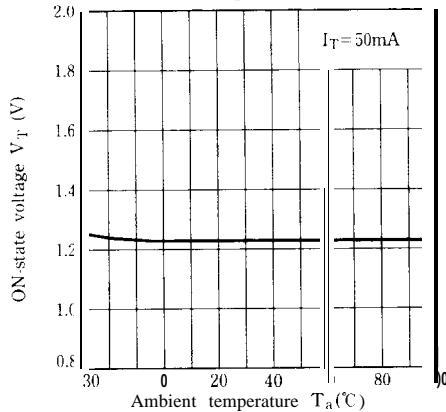

**Fig. 8 Repetitive Peak OFF-state Current vs. OFF-state Voltage**

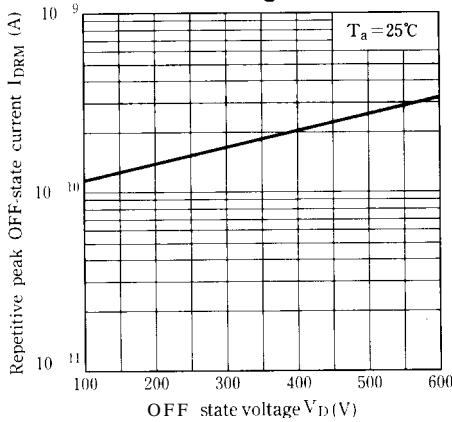

**Fig. 10 ON-state Current vs. ON-state voltage**

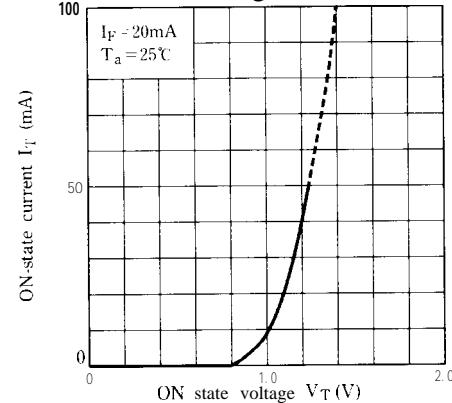

● Please refer to the chapter "Precautions for Use" (Page 78 to 93).