

GP1 S55T

Compact, **High** Sensing
Accuracy Narrow Gap
Type Photointerrupter

■ Features


1. Compact package (Case height : 8mm)
2. High sensing accuracy
(Slit width : "Detector side" : 0.15mm,
Emitter side : 0.5mm)
3. Easy positioning to PWB with positioning
pin
4. PWB direct mounting type

■ Applications

1. OA equipment such as FDDs, printers,
facsimiles
2. VCRs, cassette decks
3. Optoelectronic switches, electronic
counters, edge sensors

■ Outline Dimensions

(Unit : mm)

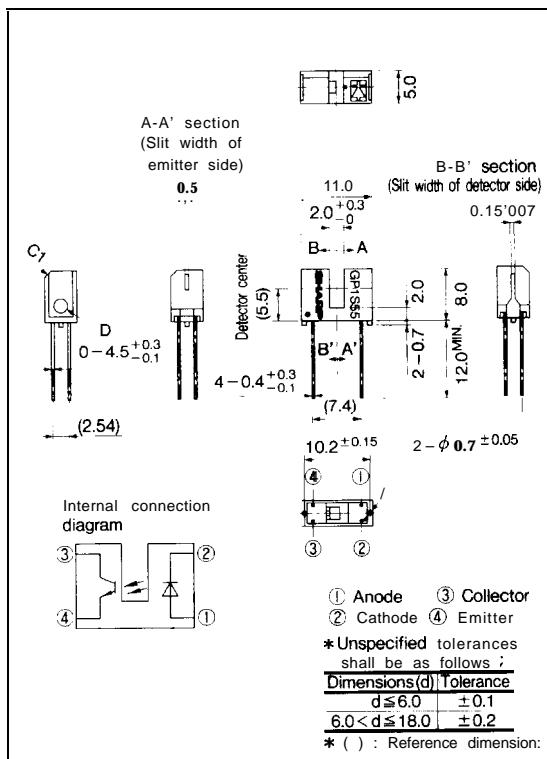

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Input	Forward current	IF	mA
	* ¹ Peak forward current	IFM	A
	Reverse voltage	V _R	v
	Power dissipation	P	mW
output	Collector-emitter voltage	V _{CEO}	v
	Emitter-collector voltage	V _{ECO}	v
	Collector current	I _C	mA
	Collector power dissipation	P _C	mW
Operating temperature	T _{opr}	-25 to +85	°C
Storage temperature	T _{stg}	-40 to +100	°C
* ² Soldering temperature	T _{sot}	260	°C

*1 Pulse width $\leq 100 \mu s$, Duty ratio = 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F =20mA	—	1.2	1.4	V
	Peak forward voltage	V _{FM}	I _{FM} =0.5A	—	3	4	V
	Reverse current	I _R	V _R =3V	—	—	10	μA
Output	Collector dark current	I _{CEO}	V _{CE} =20V	—	1	100	nA
Transfer characteristics	Current transfer ratio	CTR	I _F =20mA, V _{CE} =5V	3	—	—	%
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F =40mA, I _C =0.6mA	—	—	0.4	V
	Response time	t _r	V _{CE} =2V, I _C =2mA	—	5	25	μs
	Fall time	t _r	R _L =100Ω	—	6	30	μs

Fig. 1 Forward Current vs.
Ambient Temperature

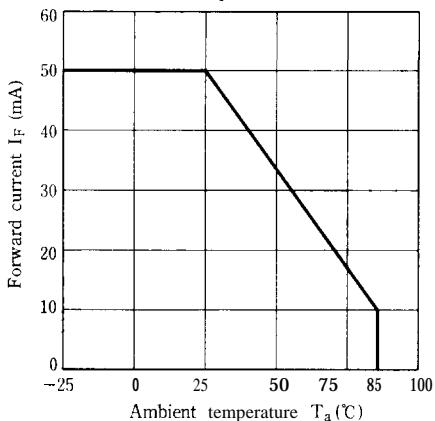


Fig. 3 Peak Forward Current vs.
Duty Ratio

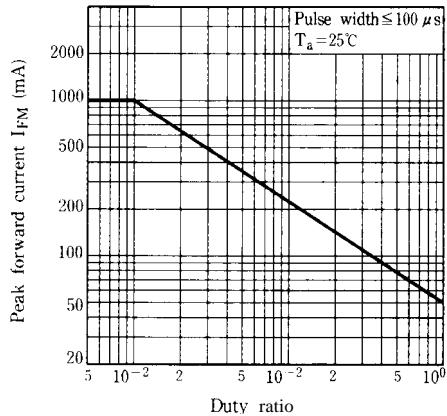


Fig. 2 Collector Power Dissipation vs.
Ambient Temperature T_a (mW)

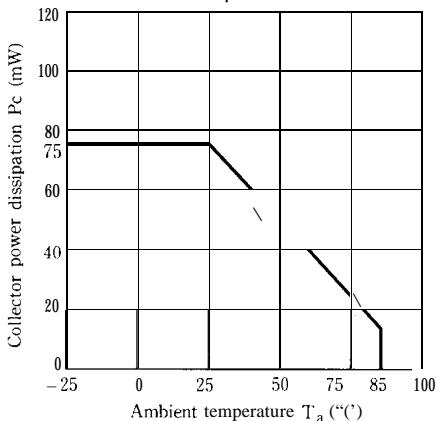


Fig. 4 Forward Current vs.
Forward Voltage

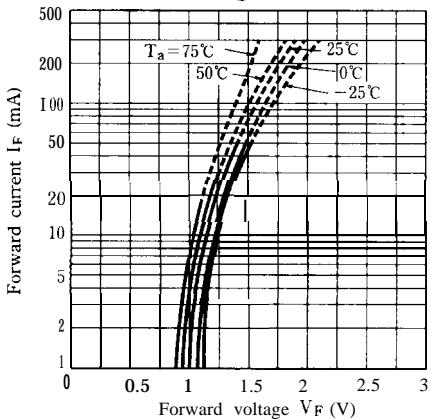


Fig. 5 Collector Current vs. Forward Current

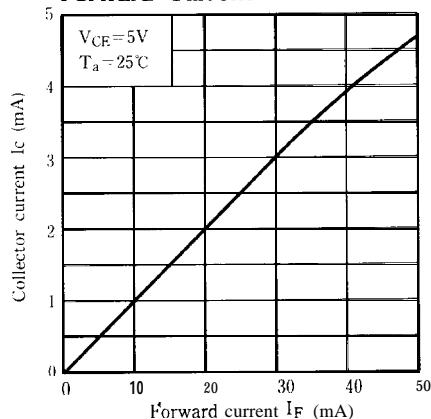


Fig. 7 Collector Current vs. Ambient Temperature

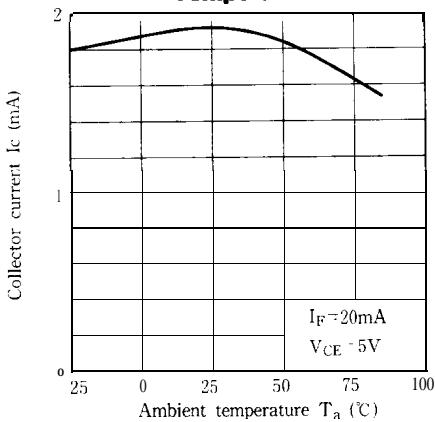


Fig. 9 Response Time vs. Load Resistance

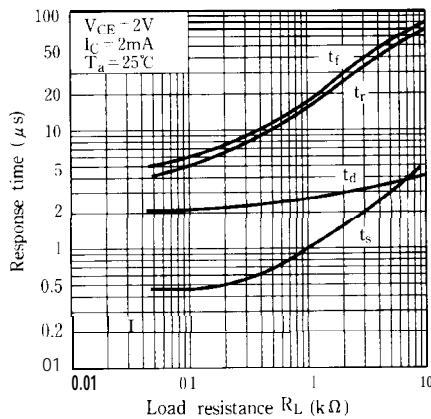


Fig. 6 Collector Current vs. Collector-emitter Voltage


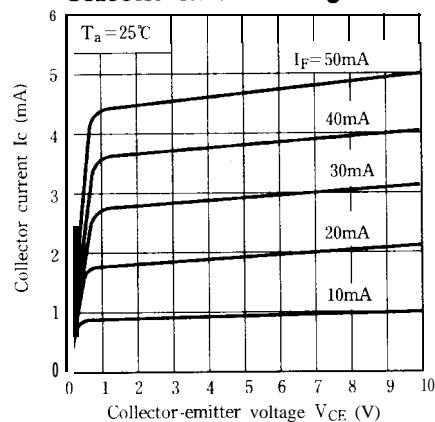


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

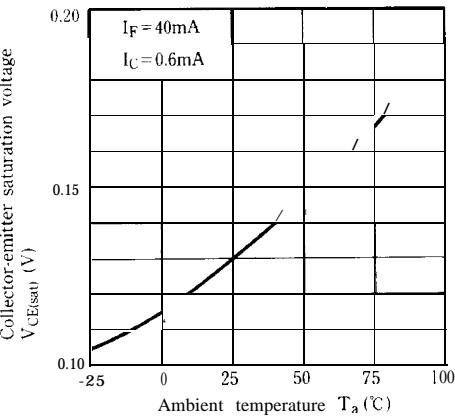

Test Circuit for Response Time

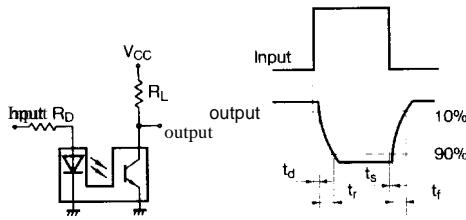
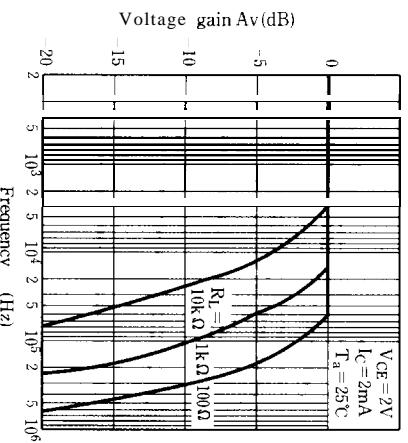
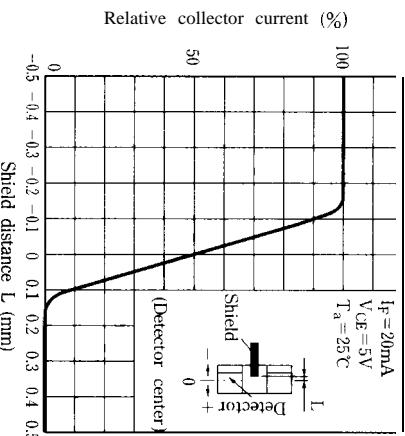
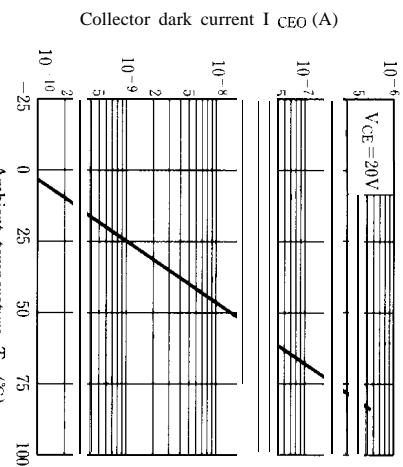


Fig.10 Frequency Response**Fig.12 Relative Collector Current vs. Shield Distance(1)****■ Precautions for Use**

- (1) In case of cleaning, use only the following type of cleaning solvent.
Ethyl alcohol, methyl alcohol, isopropyl alcohol
- (2) As for other general cautions, refer to the chapter "Precautions for Use." (Page 78 to 93)

Fig.11 Collector Dark Current vs. Ambient Temperature**Fig.13 Relative Collector Current vs. Shield Distance(2)**