

# GPI L53V

Compact, **High Sensing**  
Accuracy Type  
Photointerrupter


## ■ Features

1. Compact type
2. High sensing accuracy (Slit width: 0.5mm)
3. High current transfer ratio  
(CTR : MIN. 30% at  $I_F=1mA$ )
4. PWB direct mounting type

## ■ Applications

1. OA equipment such as FDDs, printers, facsimiles, etc.
2. VCRs
3. Optoelectronic switches

## ■ Outline Dimensions (Unit : mm)

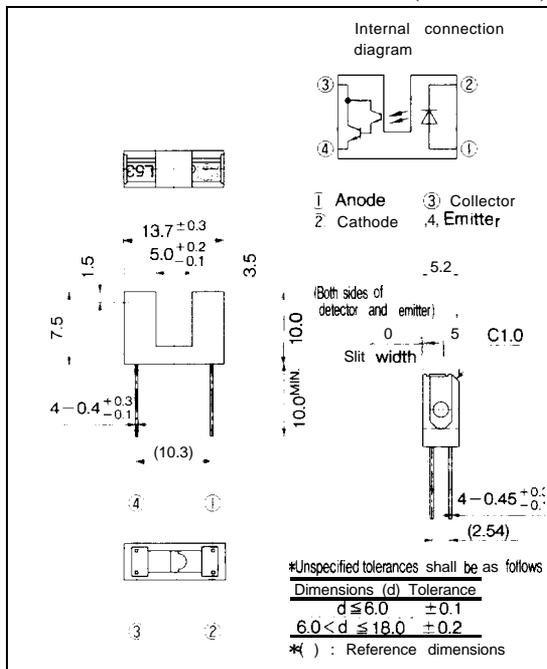

## ■ Absolute Maximum Ratings

( $T_a = 25^\circ C$ )

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	v
	Power dissipation	P	75	mW
Output	Collector -emitter voltage	$V_{CEO}$	35	v
	Emitter-collector voltage	$V_{ECO}$	6	v
	Collector current	$I_C$	40	mA
	Collector power dissipation	$P_C$	75	mW
Operating temperature		$T_{opr}$	-25 to +85	$^\circ C$
Storage temperature		$T_{stg}$	-40 to +100	$^\circ C$
*Soldering temperature		$T_{sol}$	260	$^\circ C$

\*1 Pulse width  $\leq 100 \mu s$ , Duty ratio = 0.01


\*2 For 5 seconds

**■ Electro-optical Characteristics**


( $T_a = 25^\circ\text{C}$ )

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	$V_F$	$I_F = 20\text{mA}$		1.25	1.4	V	
	Peak forward voltage	$V_{FM}$	$I_{FM} = 0.5\text{A}$		3	4	V	
	Reverse current	$I_R$	$V_R = 3\text{V}$			10	$\mu\text{A}$	
Output	Collector dark current	$I_{CEO}$	$V_{CE} = 10\text{V}$	—		$10^{-6}$	A	
Transfer characteristics	Current transfer ratio	CTR	$I_F = 1\text{mA}, V_{CE} = 2\text{V}$	30	—	2 000	%	
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 2\text{mA}, I_C = 0.3\text{mA}$	—	—	1.0	V	
	Response time	Rise time	$t_r$	$V_{CE} = 2\text{V}, I_C = 2\text{mA}$	—	80	400	$\mu\text{s}$
		Fall time	$t_f$	$R_L = 100\Omega$	—	70	350	$\mu\text{s}$


**Fig. 1 Forward Current vs. Ambient Temperature**

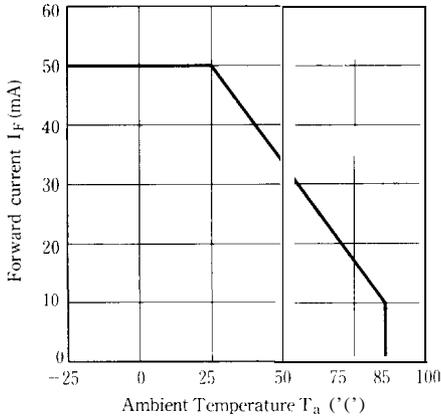


**Fig. 2 Collector Power Dissipation vs. Ambient Temperature**

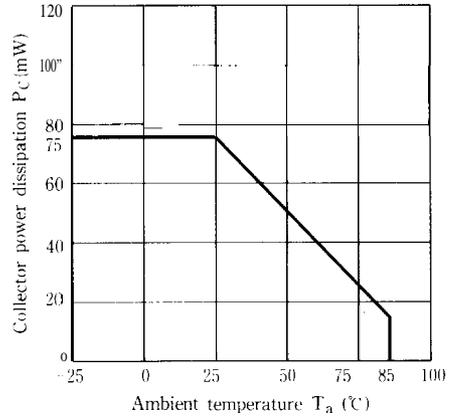


**Fig. 3 Peak Forward Current vs. Duty Ratio**

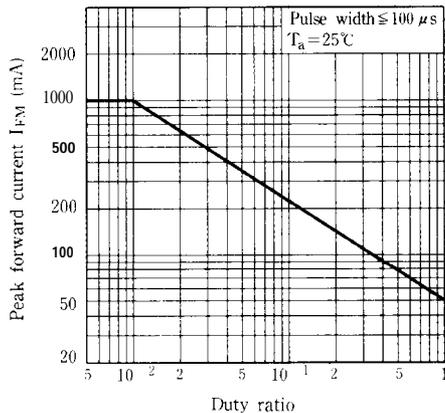


**Fig. 4 Forward Current vs. Forward Voltage**

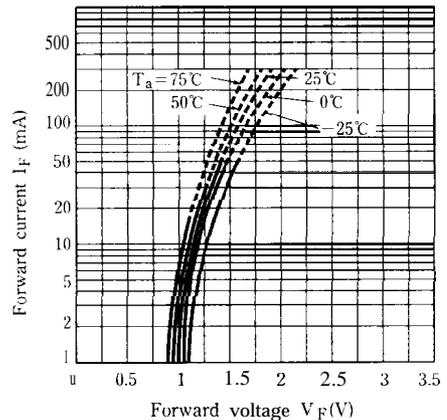


**Fig. 5 Collector Current vs. Forward Current**

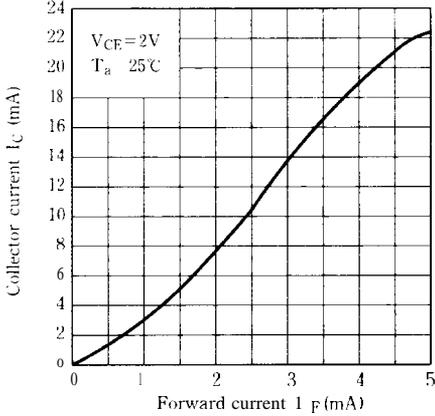


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

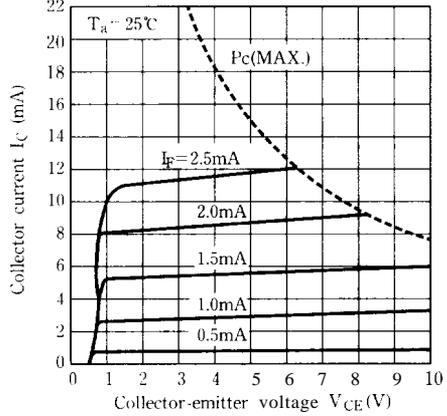


**Fig. 7 Collector Current vs. Ambient Temperature**

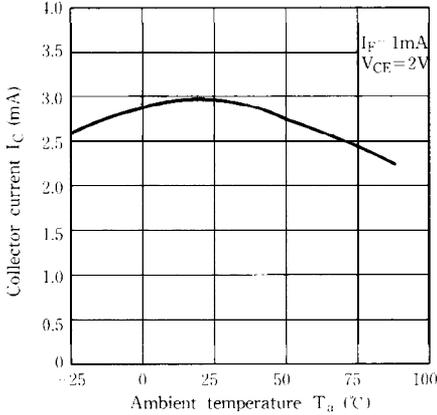


**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

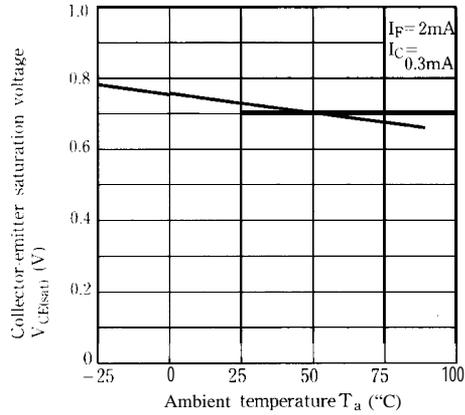


**Fig. 9 Response Time vs. Load Resistance**

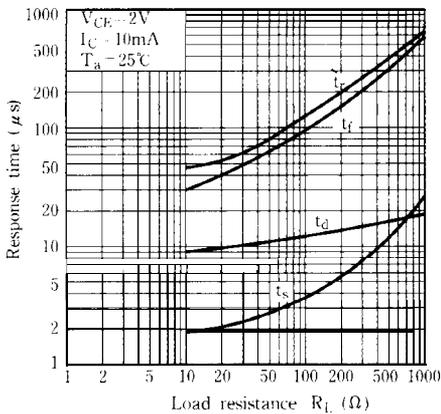


**Test Circuit for Response Time**

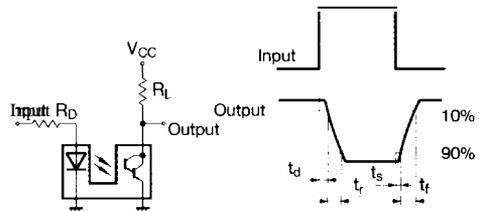


**Fig.10 Frequency Response**

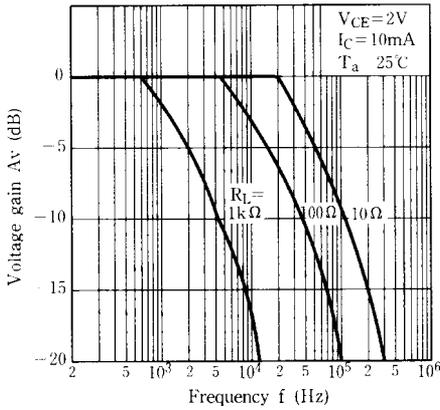


**Fig.11 Collector Dark Current vs. Ambient Temperature**

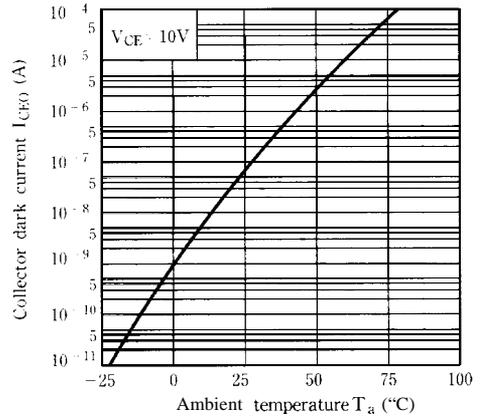

**Fig.12 Relative Collector Current vs. Shield Distance (1)**

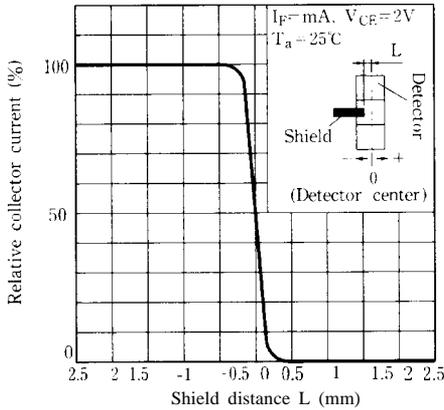

**Fig.13 Relative Collector Current vs. shield Distance (2)**

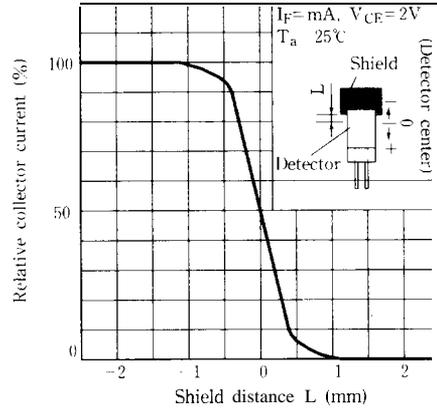

■ Precautions for Use

- (1) In case of cleaning, use only the following type of cleaning solvent.  
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol
- (2) As for other general cautions, refer to the chapter "Precautions for Use" (Page 78 to 93)