


IR3C07/IR3C07N

Pin Assignment

IR3C07/IR3C07N		
Pin No.	Symbol	Function
1	OUT	output
2	Cp	Phase Compensation
3	IM	Monitor input
4	GND	Ground
5	INH	Inhibit input (on/off)
6	So	Operating signal (output)
7	V _{CC}	Control Circuit Power Supply
8	V _{PS}	Laser Drive Power Supply

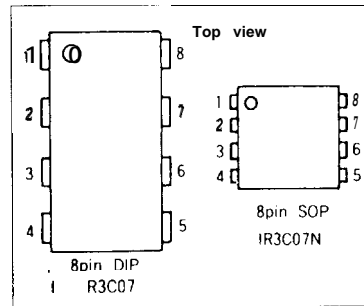

Absolute Maximum Ratings

Parameter	Symbol	Remarks	Ratings	Unit
			IR3C07/IR3C07N	
Supply Voltage	V _{CC}	Pin ⑦	10	v
Supply Voltage	V _{PS}	Pin ⑧	10	v
Output Current	I _o	Pin ①	-170	mA
Inhibit Input Voltage	V _I	Pin ⑤	-0.2 to V _{CC}	v
Power Dissipation	P _C	T _a ≤ 25°C	800/500	mW
Derating ratio		T _a > 25°C	7.0/4.4	mW/°C
Operating Temperature	T _{opr}		-30 to +85	°C
Storage Temperature	T _{stg}		-55 to +150	°C
Output Current	I _{os}	Pin ⑥ (on time)	5	mA
Output Applied-Voltage	V _{os}	pin ⑥ (off time)	-0.2 to V _{CC}	v

Electrical Characteristics

(V_{CC}=5V, V_{PS}=5V, T_a=25°C)

Parameter	Symbol	condition	Rating			Units	
			MIN	TYP	MAX		
Operating Supply Voltage	V _{CC}	—	4.5	5.0	5.5	v	
Circuit Current	I _{CC ON}	V _I = 5 V	—	33.8	6.8	mA	
	I _{CC OFF}	V _I = 0 V	—	5.00	0.0		
Output Voltage	V _{O1}	I _o = -150mA	3.7	4.1	—	v	
	V _{O2}	I _o = -100mA	3.8	4.2	—		
	V _{O3}	I _o = -20mA	3.9	4.3	—		
Output Voltage	V _{OS1}	I _{os} = 0mA	—	0.05	—	v	
	V _{OS2}	I _{os} = 2mA	—	0.1	0.4		
Inhibit Input Voltage	High	V _{IH}	V _O , V _{OS} : L→H	1.43	1.53	1.63	v
	Low	V _{IL}	V _O , V _{OS} : H→L	1.23	1.33	1.43	
Voltage Hysteresis	V _{IHY}	(V _{IH} - V _{IL})	—	200	—	mV	
Inhibit Input Current	I _I	—	—	-0.3	-5	μA	
Monitor Input Pin Voltage	V _M	In equilibrium operation	1.71	1.95	2.19	v	
Monitor Input Pin Current	I _M	—	—	-0.3	-5	μA	
Light Output Power Supply Deviation	ΔI _p /I _p ΔV _{CC}	V _{CC} = 5V ± 10%	—	0.2	—	%/V	
Light Output Change Range	ΔI _p /I _p	T _a = -20 to +85°C	—	0.2	—	%	