

## DATA SHEET

# 8300 Series: Temperature-Stable Resonators

## Applications

- AMPS/GSM/PCS/DBS/TVRO
- Dielectric resonator oscillators
- Microwave filters and combiners

## Features

- High  $\epsilon'$
- High Q
- Linear  $\tau f$
- Frequency stability versus temperature
- Reduced size and weight
- Low loss
- Close channel spacing
- Ease of temperature compensation

## Description

Skyworks, through its wholly owned subsidiary, Trans-Tech, offers the 8300 series of temperature-stable resonators for a Personal Communications System (PCS)/ Personal Communications Network (PCN)/ Digital Communications System (DCS)/ Global System for Mobile (GSM) communication application. The 8300 series combines a good Quality Factor (Q) with a reasonable cost. A wide range of temperature coefficients is available.

## Size Recommendations

Common sizes accommodate frequencies from 0.8 GHz to 13.5 GHz. Our staff provides the experience to guide designers toward the best mechanical configuration for optimal performance in customer cavities.

**Note:** Components are custom manufactured. Contact us for advice on support, tuning, and resonator configurations. A frequency accuracy to 0.5% of a customer-provided correlation sample is standard.




**Table 1. Temperature Characteristics for Series D/C83**

Type	Dielectric Constant	Temperature Coefficient of $f_0$ ( $\tau f$ ) $\pm 2$ (ppm/°C)	Q at 4.3 GHz
74	$36.5 \pm 1.0$	+9	>9500
73	$36 \pm 1$	+6	
72	$35.7 \pm 1.0$	+3	
71	$35.5 \pm 1.0$	0	
70	$35 \pm 1$	-3	

**Note:** Contact us for custom  $\tau f$  and other tolerances.

**Table 2. Material Characteristics**

Item	Value
Dielectric constant	35.0 to 36.5
Temperature coefficient of resonant frequency ( $\tau f$ ) (ppm/°C)	-3 to +9
Q (1/tan $\delta$ ) minimum	9500 at 4.3 GHz 28,000 at 850 MHz
Insulation resistance ( $\Omega$ cm) (volume resistivity) @ 25°C	$\sim 10^{13}$
Thermal expansion (ppm/°C) (20°C – 200°C)	10
Thermal conductivity (cal/cm-sec °C) at 25°C	0.0045
Specific heat (cal/g°C)	0.15
Density (g/cc)	>4.65
Water absorption	<0.01
Composition	Titanate based
Color	Rust

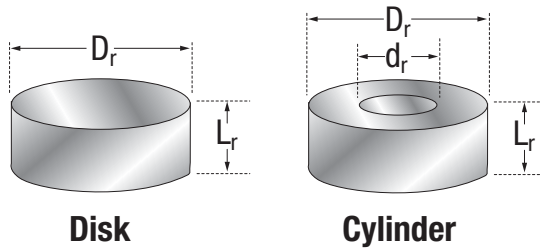

K134

Table 3. Disk and Cylinder Ranges

Disk	Cylinder
Diameter Range	
Dr: 0.975 to 0.160 Lr: 35% to 45% of Dr dr: N/A	Dr: 1.4 to 0.245 Lr: 35% to 45% of Dr dr: 0.162 to 0.083
Frequency Range	
2080 MHz to 13,800 MHz	1450 MHz to 9010 MHz

Note: Contact us for custom sizes.

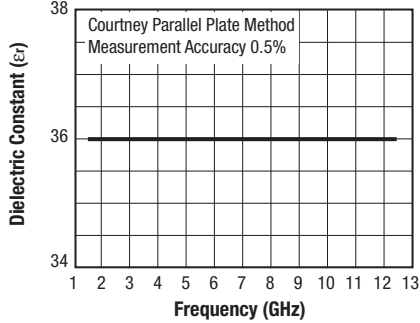


Figure 3. Typical (εr) vs Frequency

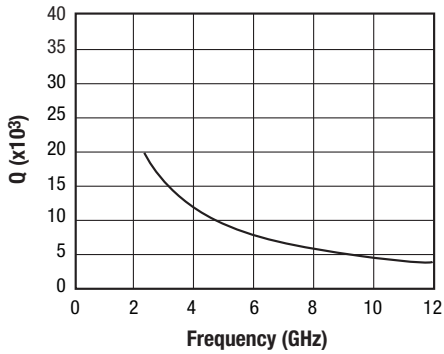


Figure 2. Typical Q vs Frequency

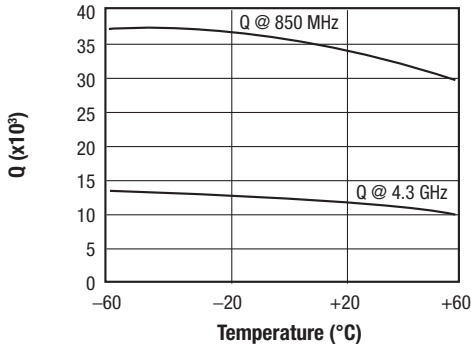


Figure 4. Typical Q vs Temperature

Copyright © 2013, 2017 Trans-Tech Inc., Inc. All Rights Reserved.

Information in this document is provided in connection with Trans-Tech, Inc. ("Trans-Tech"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Trans-Tech as a service to its customers and may be used for informational purposes only by the customer. Trans-Tech assumes no responsibility for errors or omissions in these materials or the information contained herein. Trans-Tech may change its documentation, products, services, specifications or product descriptions at any time, without notice. Trans-Tech makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Trans-Tech assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Trans-Tech products, information or materials, except as may be provided in Trans-Tech Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS, AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY, OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. TRANS-TECH DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS, OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. TRANS-TECH SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Trans-Tech products are not intended for use in medical, lifesaving, or life-sustaining applications, or other equipment in which the failure of the Trans-Tech products could lead to personal injury, death, or physical or environmental damage. Trans-Tech customers using or selling Trans-Tech products for use in such applications do so at their own risk and agree to fully indemnify Trans-Tech for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Trans-Tech products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Trans-Tech assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Trans-Tech products outside of stated published specifications or parameters.

Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.