

DATA SHEET

# SKYFR-000781: 2620-2690 MHz Single Junction Robust Lead Isolator

## Applications


- Wireless infrastructure
- Power amplifiers

## Features

- BeO free
- Small, surface mount package
- Operating frequency range: 2620 MHz to 2690 MHz
- Parts delivered on tape and reel



Skyworks Green™ products are compliant with all applicable legislation and are halogen-free. For additional information, refer to *Skyworks Definition of Green™*, document number SQ04-0074.

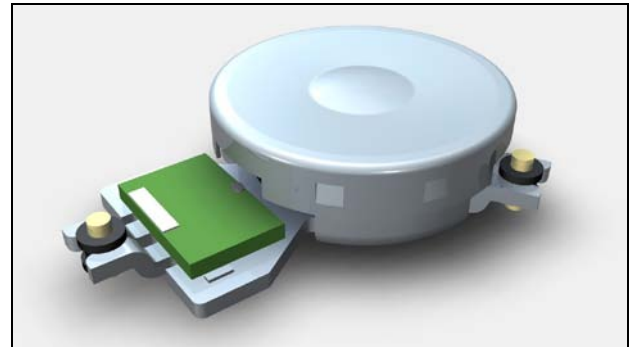

## Description

The SKYFR-000781 is a single-junction, surface mount isolator designed for wireless infrastructure applications. It operates over the frequency range of 2620 MHz to 2690 MHz. Insertion loss is less than 0.25 dB over an operating temperature range of  $-40\text{ }^{\circ}\text{C}$  to  $+90\text{ }^{\circ}\text{C}$ .

The SKYFR-000781 comes in an industry-standard surface mount package and is designed for automated SMT placement.

A block diagram of the SKYFR-000781 is shown in Figure 1. The absolute maximum ratings of the SKYFR-000781 are provided in Table 1.

Electrical specifications are provided in Table 2. Plating information is shown in Table 3. Figure 2 shows the package dimensions, and Figure 3 provides the tape and reel dimensions.

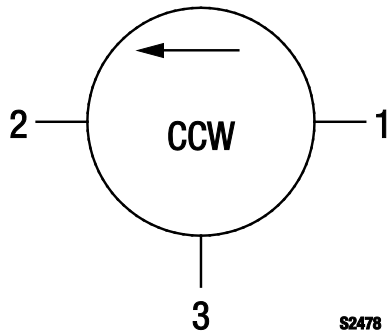


Figure 1. SKYFR-000781 Block Diagram

Table 1. SKYFR-000781 Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Input power	P <sub>IN</sub>	70	140	W
Peak power	P <sub>PEAK</sub>	200	500	W
Reverse power	P <sub>REV</sub>		70	W
Operating temperature	T <sub>OP</sub>	-40	+90	°C
Storage temperature	T <sub>ST</sub>	-55	+125	°C

**Note:** Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

Table 2. SKYFR-000781 Electrical Specifications (Note 1)

(T<sub>OP</sub> = -40 °C to +90 °C)

Parameter	Symbol	Test Condition	Min	Typical	Max	Units
Frequency range	f		2620		2690	MHz
Impedance				50		Ω
Insertion loss	IL			0.20	0.25	dB
Isolation	Iso	@2580 to 2730 MHz @2620 to 2690 MHz	20 25	28		dB dB
Out of band attenuation		2 <sup>nd</sup> harmonic 3 <sup>rd</sup> harmonic	9 15			dB dB
Return loss	RL		21			dB
Intermodulation Distortion (Note 2)	IMD	2 x 25 W CW tones, 1 MHz spacing	-70			dBc
Group delay		Over the operating temperature range			2	ns
Group delay variation					0.5	ns
Group delay variation @ 2580 to 2730 MHz					1	ns
Attenuation			29		31	dB


**Note 1:** Performance is guaranteed only under the conditions listed in this Table.

Performance will not degrade by >10% when the operating temperature increases from +90 °C to +100 °C.

**Note 2:** See Skyworks Application Note, *Intermodulation Distortion Measurements of Ferrites*, document number 201537 for further details.

Table 3. SKYFR-000781 Plating Specification

Section	Material	Plating
Pins	Bronze	Gold
Housing	Steel	Silver

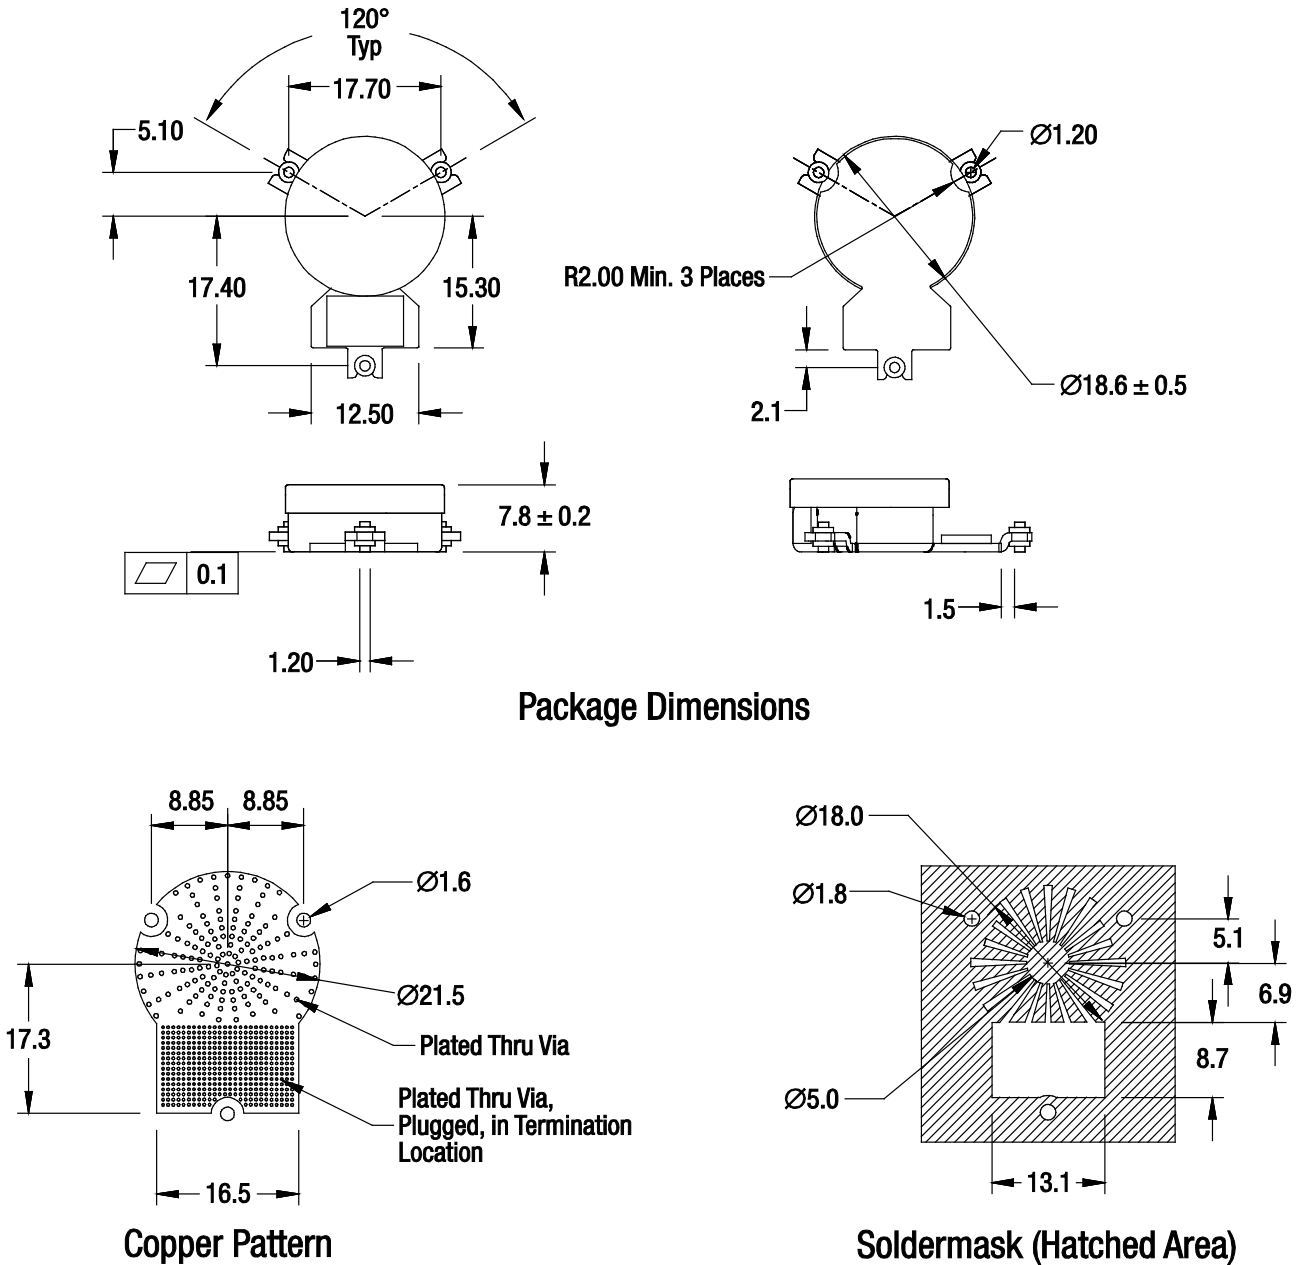

Package Dimensions

Copper Pattern


Soldermask (Hatched Area)

All measurements are in millimeters

S3353

Figure 2. SKYFR-000781 Package Dimensions and PCB Footprint

DATA SHEET • SKYFR-000781 ROBUST LEAD ISOLATOR

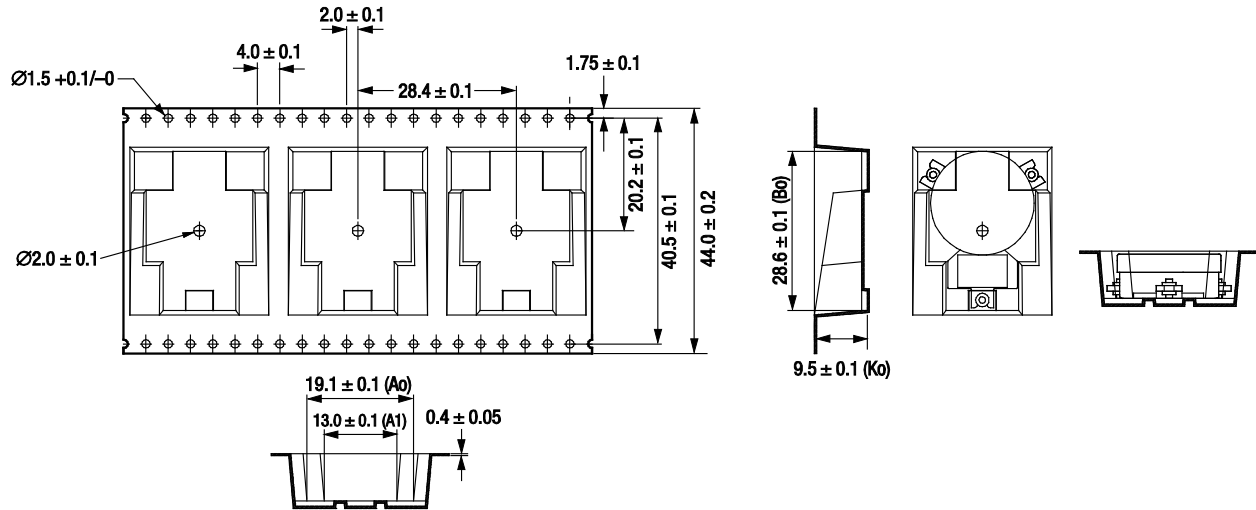

Notes:

1. All measurements are in millimeters.
2. Ten sprocket hole pitch cumulative tolerance  $\pm 0.2$  mm.
3. Carrier camber not to exceed 1 mm in 100 mm.
4. Ao and Bo measured on a plane 0.3 mm above the bottom of the pocket.
5. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.

S3354

Figure 3. SKYFR-000781 Tape and Reel Dimensions

**Ordering Information**

Model Name	Manufacturing Part Number	Evaluation Board Part Number
SKYFR-000781 Single Junction Lead Isolator	SKYFR-000781	TFX-00062

Copyright © 2013 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. (“Skyworks”) products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, and “Breakthrough Simplicity” are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.