
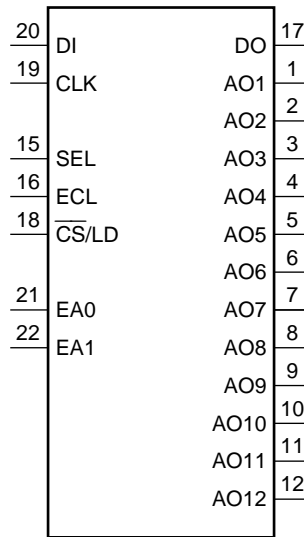


C-MOS 12-CHANNEL 8-BIT D/A CONVERTER

—TOP VIEW—

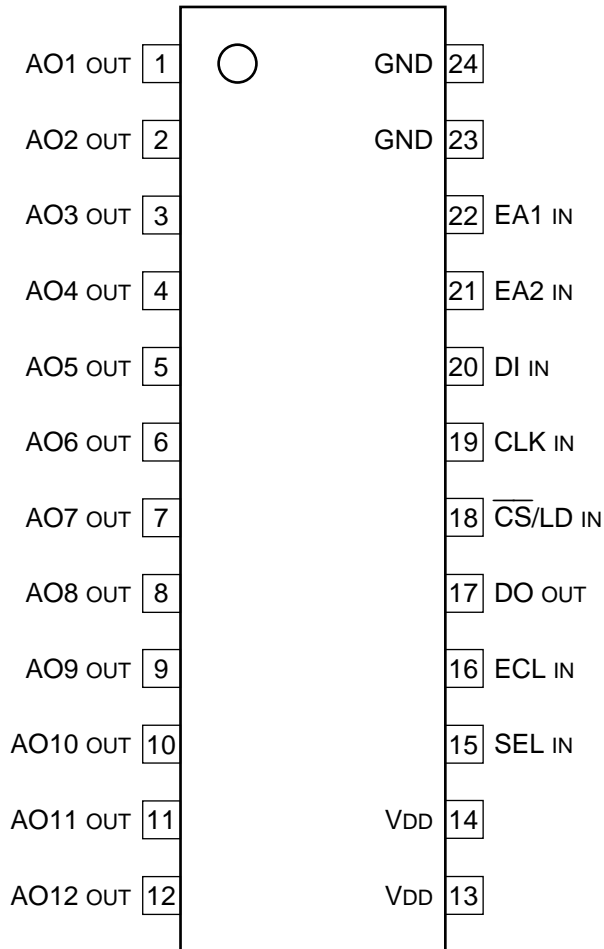

INPUT

- CLK : SHIFT CLOCK
- CS/LD : CHIP SELECT/LOAD
- DI : SERIAL DATA
- EA0, EA1 : CHANNEL/ADDRESS DECODER
- ECL : ANALOG OUTPUT CONTROL
- SEL : INPUT DATA SELECT

OUTPUT

- A0 - A12 : ANALOG SIGNAL
- DO : FIRST BIT TIMING PULSE

