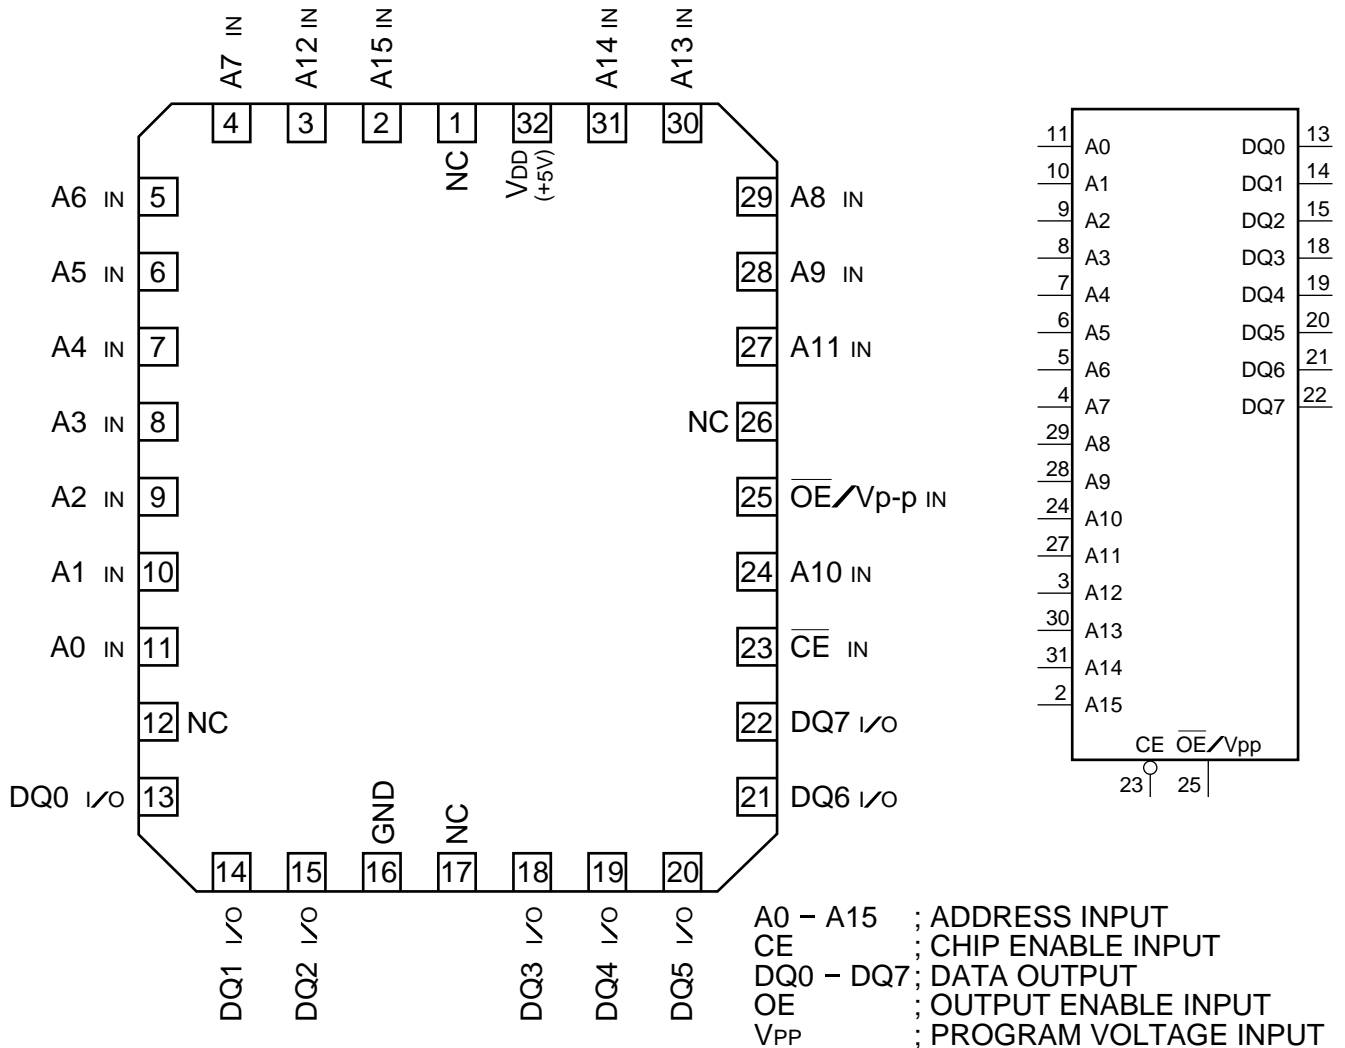

C-MOS 512K (65,536x8)-BIT UV EPROM
-TOP VIEW-



| An | CE | \overline{OE}/V_{PP} | V _{DD} | Dn | FUNCTION |
|-----------------|----|------------------------|-----------------|------------------|----------------|
| A _{IN} | 0 | 0 | +5V | D _{OUT} | READ |
| A _{IN} | 0 | 1 | +5V | HI-Z | OUTPUT DISABLE |
| x | 1 | x | +5V | HI-Z | STANDBY |
| A _{IN} | 0 | +12.5V | +6V | D _{IN} | PGM |
| A _{IN} | 0 | 0 | +6V | D _{OUT} | PGM VERIFY |
| x | 1 | +12.5V | +6V | HI-Z | PGM INH |

0 : LOW LEVEL
 1 : HIGH LEVEL
 x : DON'T CARE
 HI-Z: HIGH IMPEDANCE

