


TRANSPARENT ASYNCHRONOUS X•MITTER-RECEIVER INTERFACE  
(RECEIVER)

-TOP VIEW-

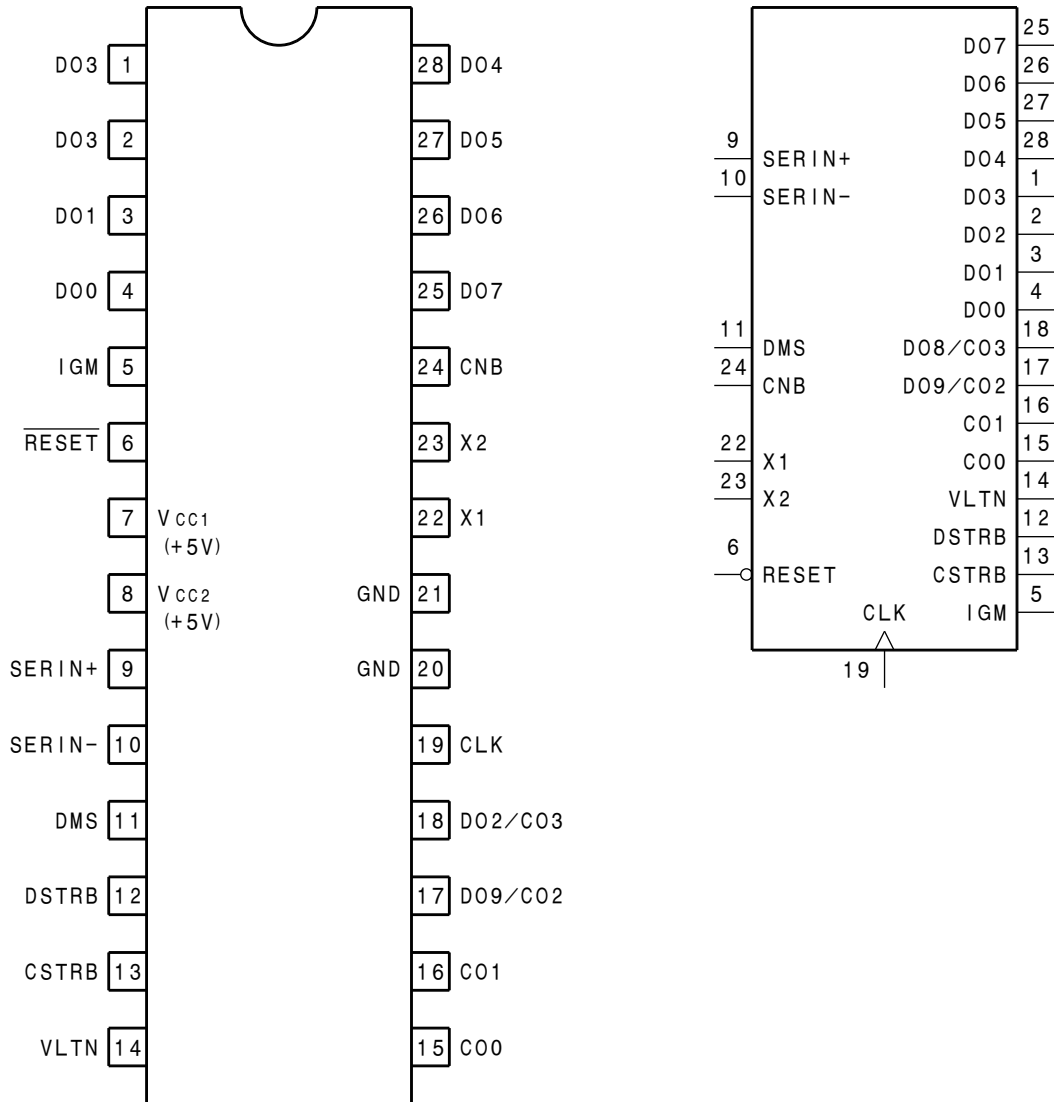

INPUT

- CNB ; CATCH NEXT BYTE INPUT
- DMS ; DATA MODE SELECT
- SERIN+, SERIN- ; DIFFERENTIAL SERIAL DATA IN

OUTPUT

- CLK ; CLOCK
- C00-C01 ; PARALLEL COMMAND OUT
- CSTRB ; COMMAND DATA STROBE
- D00-D07 ; PARALLEL DATA OUT
- D08/C03 ; PARALLEL DATA (8) OUT OR COMMAND (3) OUT
- D09/C02 ; PARALLEL DATA (9) OUT OR COMMAND (2) OUT
- DSTRB ; OUTPUT DATA STROBE
- IGM ; I-GOT-MINE
- VLTN ; VLOLATION

