
Silicon PNP Planar RF Transistor


Applications

Self-oscillating ultrahigh frequency mixer stages

Features

- High blocking voltages
- Transition frequency: $f_T = 1 \text{ GHz}$





S869T Marking: 869T Plastic case (SOT 23)

1= Collector; 2= Base; 3= Emitter

S869TR Marking Plastic case (SOT 23R)

1= Collector; 2= Base; 3= Emitter

Absolute Maximum Ratings

Parameters	Symbol	Value	Unit
Collector-base voltage	-V _{CBO}	40	V
Collector-emitter voltage	-V _{CEO}	35	V
Emitter-base voltage	V_{EBO}	3	V
Collector current	-I _C	30	mA
Total power dissipation $T_{amb} \le 20^{\circ}C$	P _{tot}	200	mW
Junction temperature	T _j	150	°C
Storage temperature range	$T_{ m stg}$	-65 to +150	°C

Maximum Thermal Resistance

Parameters	Symbol	Value	Unit
Junction ambient on glass fibre printed board			
$(25 \times 20 \times 1.5) \text{ mm}^3 \text{ plated with } 35 \mu\text{m Cu}$	R_{thJA}	450	K/W

TELEFUNKEN Semiconductors

S 869 T / S 869 T R

Electrical DC Characteristics

 $T_{amb} = 25^{\circ}C$

Parameters / Test Conditions	Symbol	Min.	Тур.	Max.	Unit
Collector-base cut-off current $-V_{CB} = 20 \text{ V}, I_E = 0 \text{ A}$	-I _{CBO}			100	nA
DC forward current transfer ratio $-V_{CE} = 10 \text{ V}, -I_{C} = 3 \text{ mA}$	$h_{ ext{FE}}$	25	50		


Electrical AC Characteristics

Parameters / Test Conditions	Symbol	Min.	Тур.	Max.	Unit
Transition frequency $-V_{CB} = 10 \text{ V}, -I_{C} = 3 \text{ mA}, f = 300 \text{ MHz}$	f_{T}		1		GHz
Collector-base capacitance $-V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C _{cb}		0.4		pF
Power gain $ -V_{CB} = 10 \text{ V}, -I_C = 3 \text{ mA}, Z_S = 50 \Omega, Z_L = 500 \Omega, \\ f = 800 \text{ MHz} $	$G_{ m pb}$		14.5		dB
Noise figure $-V_{CB}=10~V, -I_{C}=3~mA, Z_{S}=50~\Omega, Z_{L}=500~\Omega, \\ f=800~MHz$	F		4.2	5.0	dB

TELEFUNKEN Semiconductors

TEMIC

Dimensions in mm

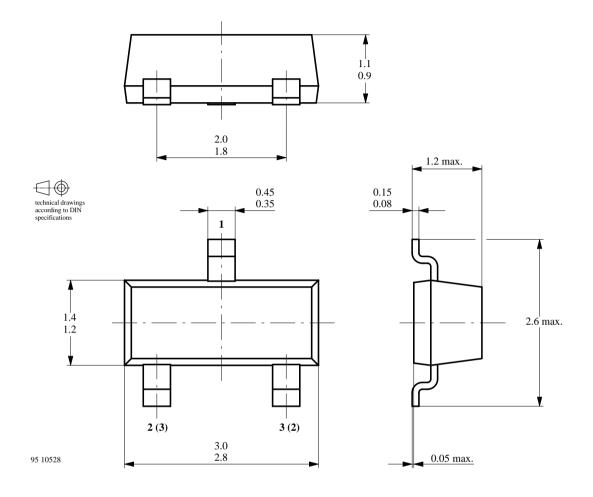

TEMIC

S 869 T / S 869 T R

TELEFUNKEN Semiconductors

Ozone Depleting Substances Policy Statement

It is the policy of TEMIC TELEFUNKEN microelectronic GmbH to

- 1. Meet all present and future national and international statutory requirements.
- 2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

TEMIC TELEFUNKEN microelectronic GmbH semiconductor division has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

TEMIC can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany Telephone: 49 (0)7131 67 2831, Fax Number: 49 (0)7131 67 2423