
GaAs Infrared Emitting Diodes in $\varnothing 5$ mm (T-1 $\frac{3}{4}$) Package

Description


TSUS 540. series are infrared emitting diodes in standard GaAs on GaAs technology, molded in a clear, blue-grey tinted plastic package. The devices are spectrally matched to silicon photodiodes and phototransistors.

Features

- Low cost emitter
- Low forward voltage
- High radiant power and radiant intensity
- Suitable for DC and high pulse current operation
- Standard T-1 $\frac{3}{4}$ ($\varnothing 5$ mm) package
- Comfortable angle of half intensity $\varphi = \pm 22^\circ$
- Peak wavelength $\lambda_p = 950$ nm
- High reliability
- Good spectral matching to Si photodetectors

Applications

Infrared remote control and free air transmission systems with low forward voltage and comfortable radiation angle requirements in combination with PIN photodiodes or phototransistors.

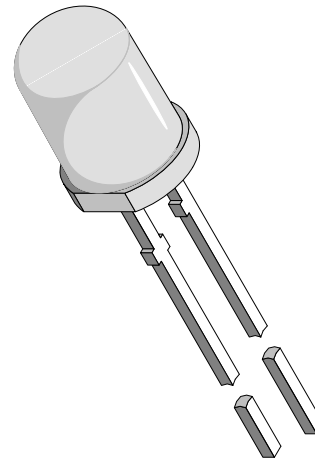

94 8390

Absolute Maximum Ratings

 $T_{amb} = 25^{\circ}\text{C}$

Parameter	Test Conditions	Symbol	Value	Unit
Reverse Voltage		V_R	5	V
Forward Current		I_F	150	mA
Peak Forward Current	$t_p/T=0.5, t_p=100\ \mu\text{s}$	I_{FM}	300	mA
Surge Forward Current	$t_p=100\ \mu\text{s}$	I_{FSM}	2.5	A
Power Dissipation		P_V	210	mW
Junction Temperature		T_j	100	$^{\circ}\text{C}$
Operating Temperature Range		T_{amb}	-55...+100	$^{\circ}\text{C}$
Storage Temperature Range		T_{stg}	-55...+100	$^{\circ}\text{C}$
Soldering Temperature	$t \leq 5\text{sec}, 2\ \text{mm from case}$	T_{sd}	260	$^{\circ}\text{C}$
Thermal Resistance Junction/Ambient		R_{thJA}	375	K/W

Basic Characteristics

 $T_{amb} = 25^{\circ}\text{C}$

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Forward Voltage	$I_F = 100\ \text{mA}, t_p = 20\ \text{ms}$	V_F		1.3	1.7	V
Temp. Coefficient of V_F	$I_F = 100\ \text{mA}$	TK_{VF}		-1.3		mV/K
Reverse Current	$V_R = 5\ \text{V}$	I_R			100	μA
Junction Capacitance	$V_R = 0\ \text{V}, f = 1\ \text{MHz}, E = 0$	C_j		30		pF
Temp. Coefficient of ϕ_e	$I_F = 20\ \text{mA}$	TK_{ϕ_e}		-0.8		%/K
Angle of Half Intensity		ϕ		± 22		deg
Peak Wavelength	$I_F = 100\ \text{mA}$	λ_p		950		nm
Spectral Bandwidth	$I_F = 100\ \text{mA}$	$\Delta\lambda$		50		nm
Temp. Coefficient of λ_p	$I_F = 100\ \text{mA}$	TK_{λ_p}		0.2		nm/K
Rise Time	$I_F = 100\ \text{mA}$	t_r		800		ns
Rise Time	$I_F = 1.5\ \text{A}$	t_r		400		ns
Fall Time	$I_F = 100\ \text{mA}$	t_f		800		ns
Fall Time	$I_F = 1.5\ \text{A}$	t_f		400		ns

Type Dedicated Characteristics

$T_{amb} = 25^{\circ}\text{C}$

Parameter	Type	Test Conditions	Symbol	Min	Typ	Max	Unit
Forward Voltage	TSUS5400/5401	$I_F=1.5\text{A}, t_p=100\mu\text{s}$	V_F		2.2	3.4	V
	TSUS5402	$I_F=1.5\text{A}, t_p=100\mu\text{s}$	V_F		2.2	2.7	V
Radiant Intensity	TSUS5400	$I_F=100\text{mA}, t_p=20\text{ms}$	I_e	7	14		mW/sr
	TSUS5401	$I_F=100\text{mA}, t_p=20\text{ms}$	I_e	10	17		mW/sr
	TSUS5402	$I_F=100\text{mA}, t_p=20\text{ms}$	I_e	15	20		mW/sr
Radiant Intensity	TSUS5400	$I_F=1.5\text{A}, t_p=100\mu\text{s}$	I_e	60	140		mW/sr
	TSUS5401	$I_F=1.5\text{A}, t_p=100\mu\text{s}$	I_e	85	160		mW/sr
	TSUS5402	$I_F=1.5\text{A}, t_p=100\mu\text{s}$	I_e	120	190		mW/sr
Radiant Power	TSUS5400	$I_F=100\text{mA}, t_p=20\text{ms}$	ϕ_e		13		mW
	TSUS5401	$I_F=100\text{mA}, t_p=20\text{ms}$	ϕ_e		14		mW
	TSUS5402	$I_F=100\text{mA}, t_p=20\text{ms}$	ϕ_e		15		mW

Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

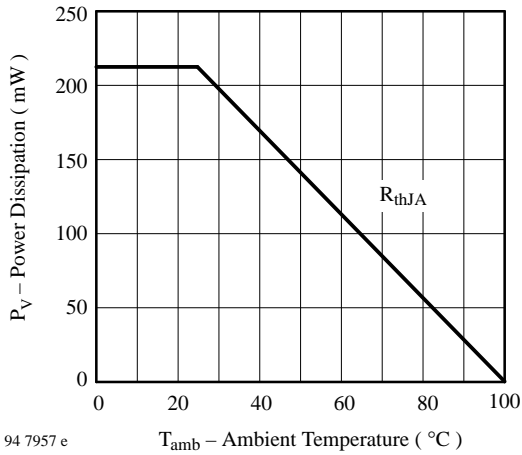


Figure 1 : Power Dissipation vs. Ambient Temperature

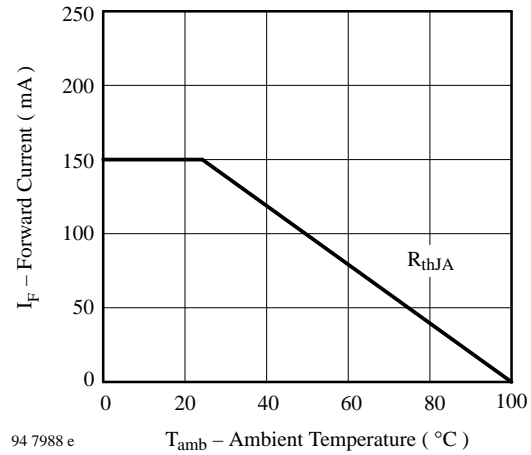


Figure 2 : Forward Current vs. Ambient Temperature

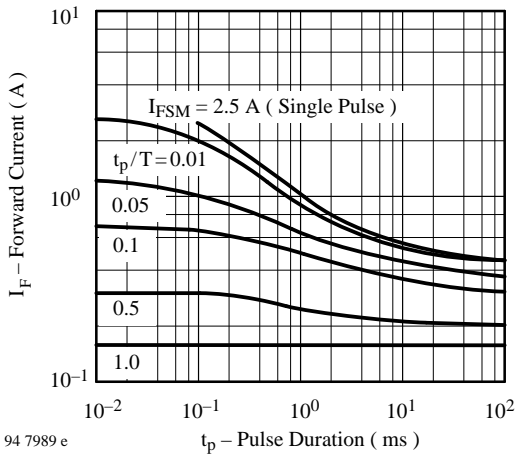


Figure 3 : Pulse Forward Current vs. Pulse Duration

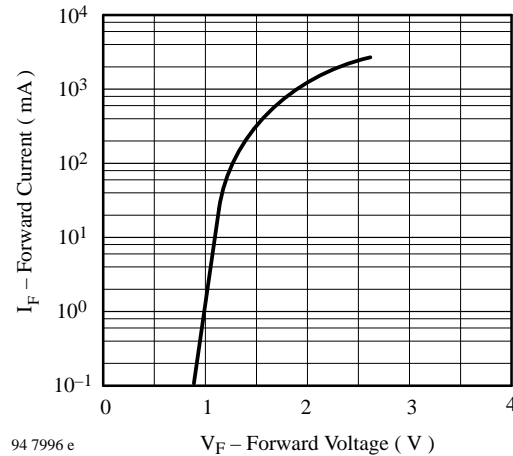


Figure 4 : Forward Current vs. Forward Voltage

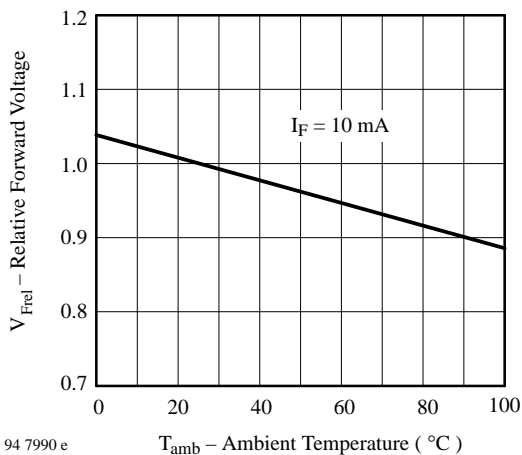


Figure 5 : Relative Forward Voltage vs. Ambient Temperature

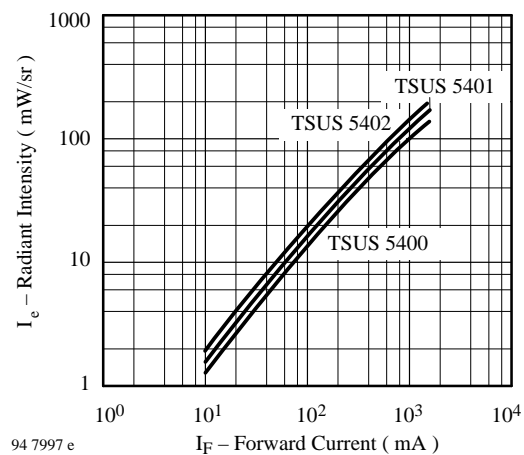


Figure 6 : Radiant Intensity vs. Forward Current

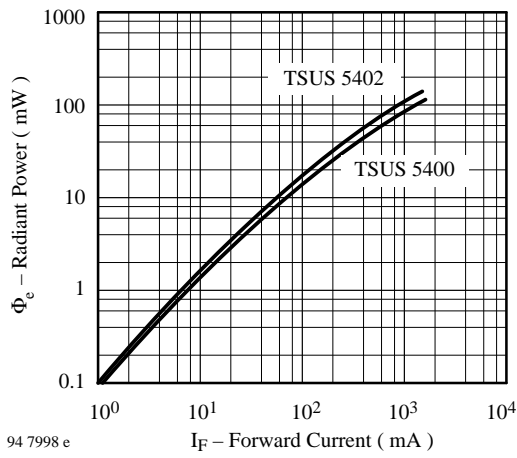


Figure 7 : Radiant Power vs. Forward Current

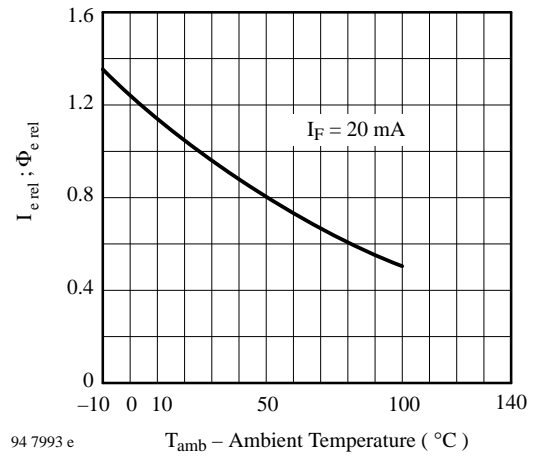


Figure 8 : Rel. Radiant Intensity/Power vs. Ambient Temperature

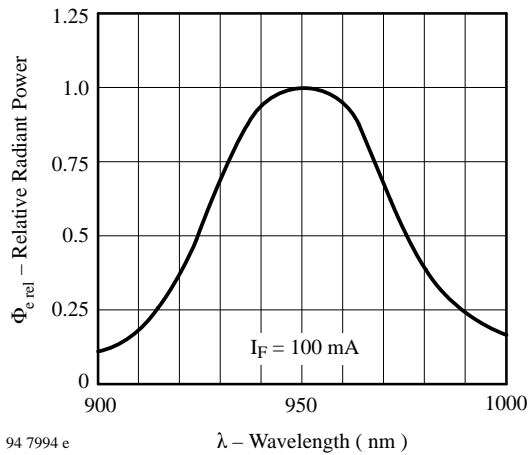


Figure 9 : Relative Radiant Power vs. Wavelength


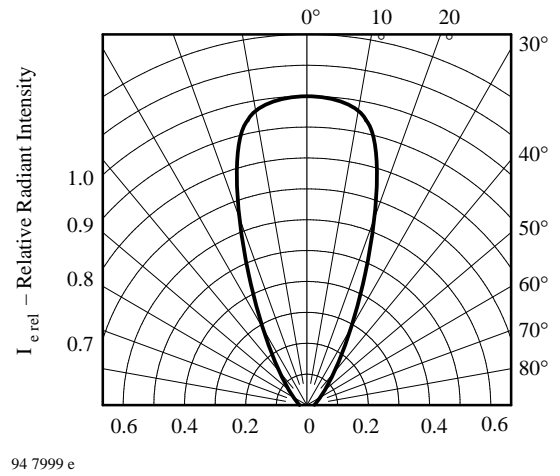


Figure 10 : Relative Radiant Intensity vs. Angular Displacement

Dimensions in mm

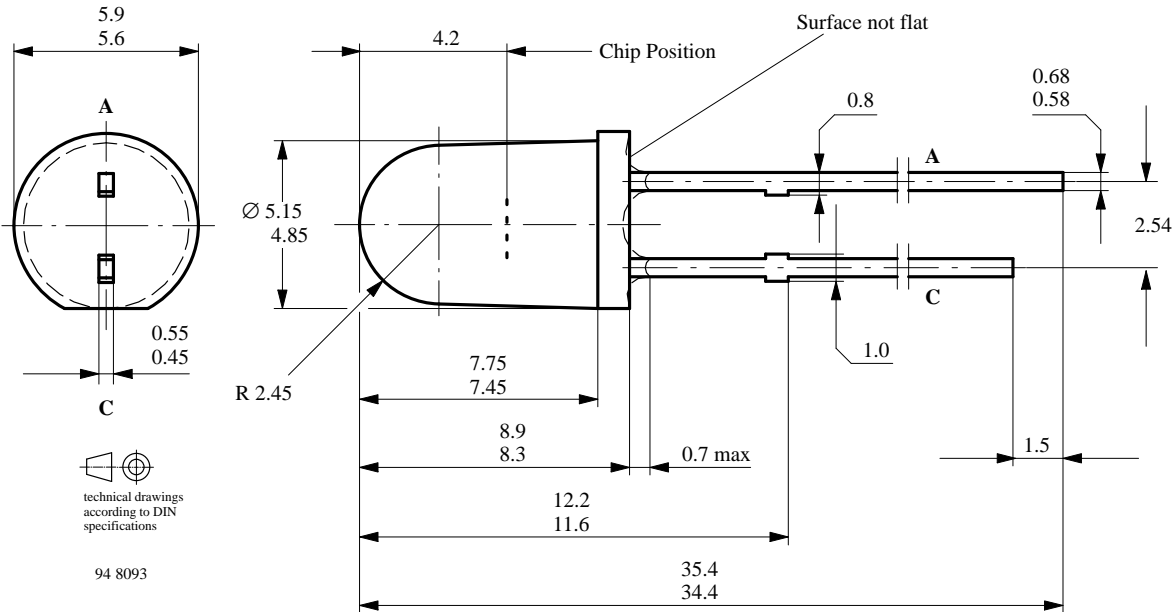

We reserve the right to make changes to improve technical design without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2831, Fax Number: 49 (0)7131 67 2423