

Two-tone Ringer for Telephone Sets

Description

The two-tone ringing circuit in conjunction with a piezo transducer replaces the normal electromechanical telephone bell. It is operated with the ringing current from the exchange. However, there is a possibility of operating the

IC with a dc supply voltage being developed for large operating range. The integrated circuit is overload protected.

Features

- Push-Pull output stage
- RC oscillator operation
- Adjustable volume
- Input protective diode
- On-chip rectifier bridge

- High voltage I²L technology
- Internal control resolution with hysteresis

Benefit

- Sequence frequency adjustable between 2.5 and 25 Hz


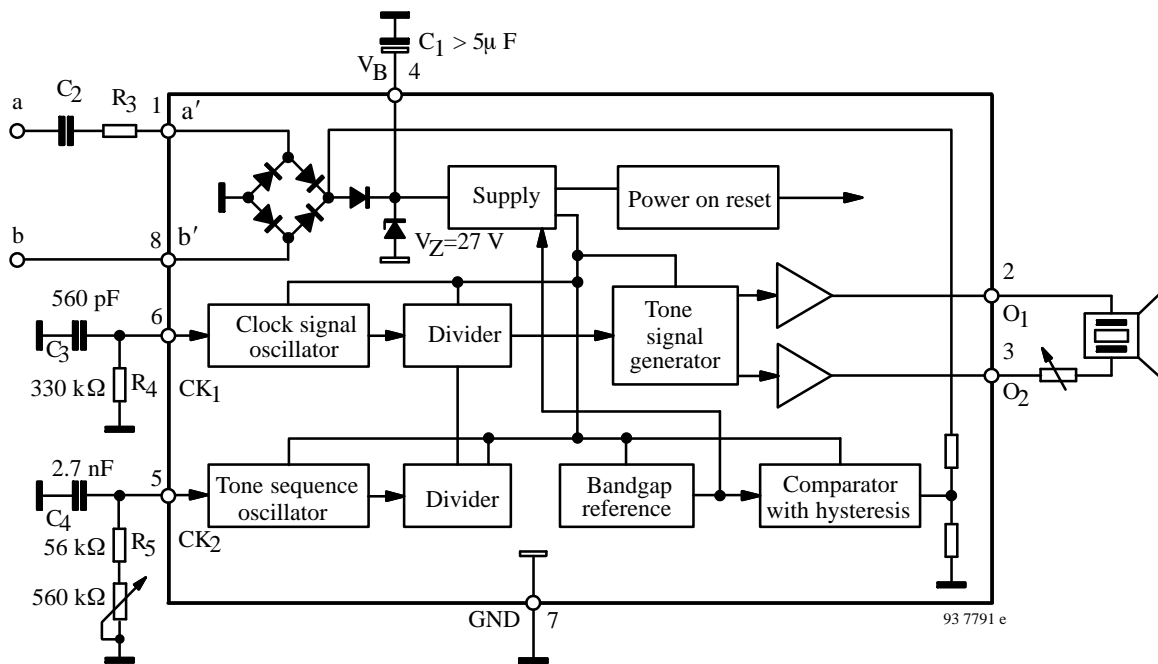


Figure 1 Block diagram of U4072B and application circuit

U4072B

Pin Description

Pin	Symbol	Function
1, 8	a', b'	AC ringing signal input
6	CK ₁	Oscillator input for clock frequency
2, 3	O ₁ , O ₂	Output signals
4	V _B	Output to charging capacitor
5	CK ₂	Oscillator input for sequence frequency
7	GND	Ground

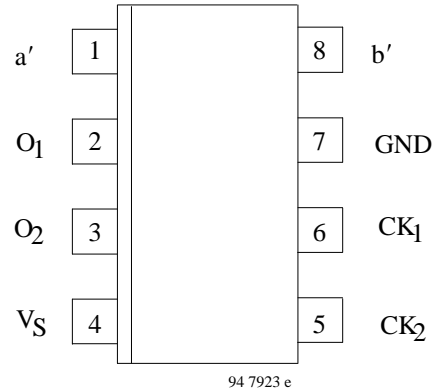

Pins 1 and 8 – Power supply

Pin 1 and Pin 8 connect the circuit with the ac ringing signal supplied by the exchange via lines a and b. A decoupling capacitor of 1 μF in series with a 2.2 k Ω resistor is required against overvoltage and insertion loss specifications. Following these specifications overload protections are fulfilled by the IC.

Pins 2 and 3 – Output signal

Push-pull outputs are used to drive a piezo-ceramic transducer. It can process an average current of up to 20 mA in both direction. The output signal without load is 2. to 2.5 V_B (V_{pp}). Volume can be controlled by an external potentiometer.

1. The integrated circuit can withstand an ac voltage of 110 V/50 Hz for 15 seconds between terminals a and b (figure 1).
2. The circuit will not be damaged by a surge voltage test with the following conditions (figure 2):

Charging voltage of surge capacitance V_{CS} = 2 kV

Pulse shape 10/700 μs

Pulse sequence 30 s

No. of surges 10

Polarity change after 5 surges

Pin 4 – Power Supply Filtering V_B

After the rectification of the ringing signal across the diode bridge in the IC, filtering of the power supply is provided with C₁ (1 to 22 μF) connected at Pin 4. An integrated Z-diode limits the maximum supply voltage up to 30 V.

Pins 5 and 6 – Inputs for Oscillators

With external RC circuitry at Pins 5 and 6, both oscillators supply audio sequence and ringing (clock) frequencies. Sequence frequency adjustment is determined with a resistor range between 43 and 600 k Ω where pulse duration is about $1.45 \cdot RC + 10 \mu\text{s}$.

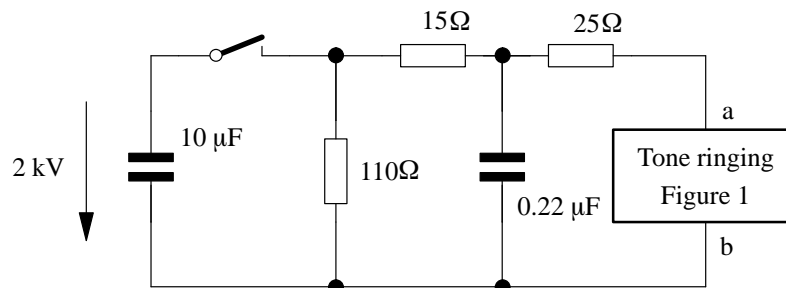


Figure 2

93 7575 e

Absolute Maximum Ratings

Reference point Pin 7, unless otherwise specified.

Parameters	Symbol	Value	Unit
Supply Current Pin 1, 8	I_S	50	mA
Output current Pin 2, 3	$\pm I_O$	50	mA
Ambient temperature range	T_{amb}	-25 to +60	°C
Storage temperature range	T_{stg}	-40 to +125	°C
Power dissipation, $T_{amb} = 60^\circ\text{C}$	P_{tot}	590	mW
Junction temperature	T_j	125	°C

Thermal Resistance

Parameters	Symbol	Value	Unit
Junction ambient	R_{thJA}	110	K/W

Electrical Characteristics

$V_B = 10\text{ V}$, $f = 4\text{ kHz}$, $T_{amb} = 25^\circ\text{C}$, reference point Pin 7, unless otherwise specified.

Parameters	Test Conditions / Pins	Symbol	Min.	Typ.	Max.	Unit
Supply current, outputs open	$V_B = 10\text{ V}$ Pin 4	I_S	1.5	2.0	2.5	mA
Switch-on threshold	Pin 4		5.7	7.7	9.5	V
Switch-off threshold	Pin 4		2.8	4.1	5.3	V
Ringing frequency	$R_4 = 160\text{ k}\Omega$, $C_3 = 1\text{ nF}$ Pin 2, 3	f_{1H}	937	1010	1083	Hz
		f_{1L}	752	808	868	
Audio sequence frequency	$R_5 = 160\text{ k}\Omega$, $C_4 = 1\text{ nF}$ Pin 2, 3	f_2	11.5	12.5	14.0	HZ
Internal voltage limitation	$I_Z = 1\text{ mA}$ Pin 2, 3	V_Z	25	27	30	V
Range of R_4 and R_5 resistance values	Pin 5, 6	R	43		600	k Ω


U4072B

Order Information

Extended Type Number	Package	Remarks
U4072B	DIP 8	

Dimensions in mm

Package: DIP 8

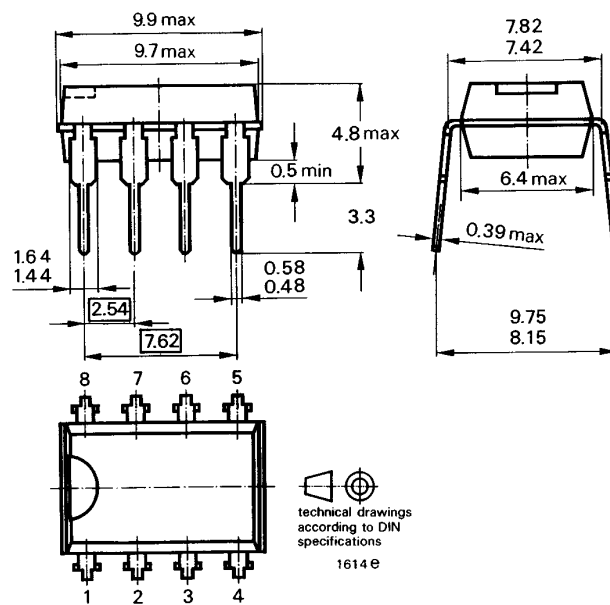

Ozone Depleting Substances Policy Statement

It is the policy of **TEMIC TELEFUNKEN microelectronic GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

TEMIC TELEFUNKEN microelectronic GmbH semiconductor division has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

TEMIC can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423