

## Data Quantizer

### Description


U 6792 B-D data quantizer is a low-noise, wideband IC for signal recovering in fiber optic receiver systems. It contains a three stage wideband limiting amplifier which accepts input signal as low as 1.5 mV<sub>pp</sub> with a 60 dB dynamic range. This sensitivity is achieved by using a dc

restoration feedback loop which nulls any offset voltage produced in the limiting amplifier. The ECL output buffer can drive 50 Ω loads to -2 V. The minimum signal discriminator circuit provides a link monitor function with a user selectable threshold voltage.

### Features


- 200-MHz minimum bandwidth allows for data rates of up to 200 Mb/s
- Low-noise design: 25 μV RMS over 200-MHz range
- Adjustable link monitor function
- Wide 60-dB input dynamic range
- 2.5 ns minimum input pulse
- Low-power design: 30 mA maximum without load
- Regulated voltage output for supply voltage independent threshold adjust
- Available in SO-16 package or chip form

### Block Diagram

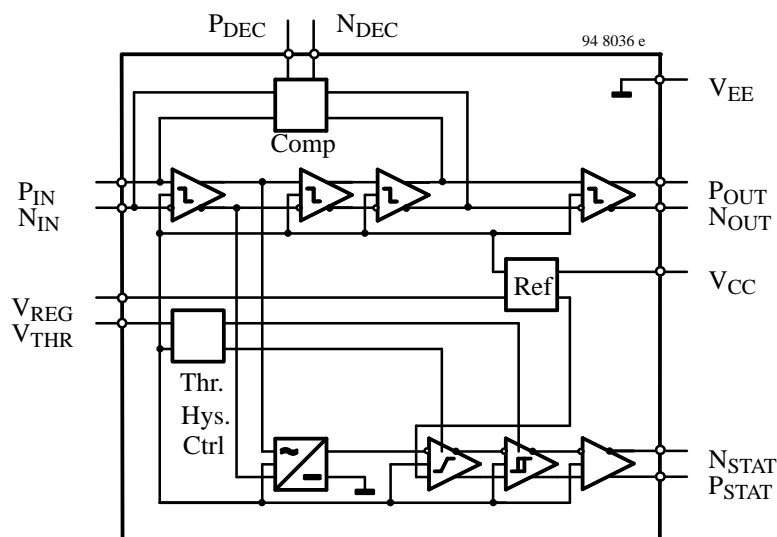

## Pin Description

| Pin   | Symbol                              | Function   |
|-------|-------------------------------------|--|
| 1, 2  | V <sub>CC</sub>                     | Positive supply voltage  |
| 3,4   | P <sub>IN</sub> , N <sub>IN</sub>   | Capacitively coupled to the input source or to ground (the input resistance is approximately 5 kΩ)                 |
| 5, 6  | V <sub>CC</sub>                     | Positive supply voltage  |
| 7     | V <sub>REG</sub>                    | 3.1 V reference voltage with respect to V <sub>EE</sub> (should be decoupled with min. 10 nF to V <sub>EE</sub> .) |
| 8     | V <sub>THR</sub>                    | Threshold adjusting for the link monitor circuit   |
| 9, 10 | V <sub>EE</sub>                     | Negative supply voltage  |
| 11    | N <sub>STAT</sub>                   | Negative ECL compatible link monitor output  |
| 12    | P <sub>STAT</sub>                   | Positive ECL compatible link monitor output  |
| 13,14 | P <sub>DEC</sub> , N <sub>DEC</sub> | A decoupling capacitor must be connected between these pins  |
| 15    | N <sub>OUT</sub>                    | Negative ECL compatible output   |
| 16    | P <sub>OUT</sub>                    | Positive ECL compatible output   |

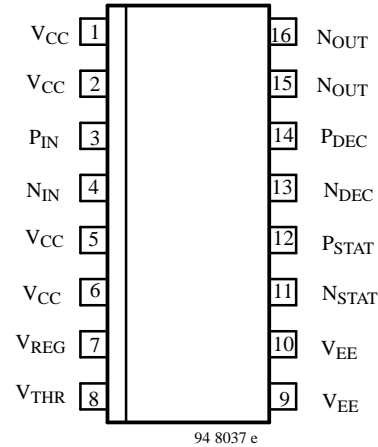

## Absolute Maximum Ratings

| Parameters                            | Symbol           | Value                  | Unit |
|---------------------------------------|------------------|------------------------|------|
| Supply voltage Pins 9 and 10          | V <sub>EE</sub>  | 6.0                    | V    |
| Input voltage Pins 3, 4, 8, 13 and 14 | V <sub>i</sub>   | V <sub>EE</sub> to GND | V    |
| Junction temperature                  | T <sub>j</sub>   | 125                    | °C   |
| Storage temperature range             | T <sub>stg</sub> | -40 to +125            | °C   |

## Operating Range

| Parameters                     | Symbol           | Value      | Unit |
|--------------------------------|------------------|------------|------|
| Supply voltage range Pin 9, 10 | V <sub>EE</sub>  | 4.5 to 5.7 | V    |
| Ambient temperature range      | T <sub>amb</sub> | -40 to +85 | K/W  |

## Thermal Resistance

| Parameters             | Symbol            | Value    | Unit |
|------------------------|-------------------|----------|------|
| Junction ambient SO-16 | R <sub>thja</sub> | typ. 120 | °C   |

### DC Electrical Characteristics

Operating Conditions:  $T_{amb} = 0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ ,  $V_{EE} = -5.2\text{V} \pm 10\%$

| Parameters and Test Conditions                                 |                                   | Symbol       | Min   | Typ  | Max       | Unit          |
|--|-----------------------------------|--------------|-------|------|-----------|---------------|
| $V_{EE}$ supply current  | Unloaded outputs                  | $I_{EE}$     | -30   | -23  |           | mA            |
| Reference voltage *  |                                   | $V_{REG}$    | 3.10  | 3.15 | 3.20      | V             |
| $V_{REG}$ output current                                       |                                   | $I_{EE}$     |       |      | 100       | $\mu\text{A}$ |
| Voltage at $V_{THR}$ *   | Left open                         | $V_{THRO}$   |       | 0.45 |           | V             |
| Voltage Range of $V_{THR}$                                     |                                   | $V_{THRR}$   | 0     |      | $V_{REG}$ | V             |
| Input offset voltage   |                                   | $V_{OS}$     |       |      | 1         | mV            |
| Input resistance   | $V_{IN,NIM}$                      | $R_{IN,NIN}$ |       | 5    |           | k $\Omega$    |
| Output high level at<br>$P_{OUT}, N_{OUT}, P_{STAT}, N_{STAT}$ | With 50 $\Omega$ load<br>to -2 V  | $V_{OH}$     | -0.98 |      | -0.7      | V             |
| Output low level at<br>$P_{OUT}, N_{OUT}, P_{STAT}, N_{STA}$   | With 50 $\Omega$ load<br>to -2 V  | $V_{OL}$     | -1.89 |      | -1.62     | V             |
| Hysteresis of monitor comparator                               | Over entire range<br>of $V_{THR}$ | $V_{HYS}$    | 3     | 4    |           | dB            |

\* With reference to  $V_{EE}$

### AC Electrical characteristics

Operating conditions:  $T_{amb} = 0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ ,  $V_{EE} = -5.2\text{V} \pm 10\%$

| Parameters and Test Conditions                         |                                  | Symbol   | Min | Typ | Max  | Unit             |
|--|----------------------------------|----------|-----|-----|------|------------------|
| Input voltage range                                    |                                  | $V_{IN}$ | 1.5 |     | 1500 | mV <sub>pp</sub> |
| Input reference noise                                  |                                  | $N_T$    |     | 25  |      | $\mu\text{V}$    |
| Rise time at<br>$P_{OUT}, N_{OUT}, P_{STAT}, N_{STAT}$ | With 50 $\Omega$ load<br>to -2 V | $t_r$    | 1.1 |     | 1.9  | ns               |
| Fall time at<br>$P_{OUT}, N_{OUT}, P_{STAT}, N_{STA}$  | With 50 $\Omega$ load<br>to -2 V | $t_f$    | 1.1 |     | 1.9  | ns               |
| Propagation time                                       |                                  | $t_{pd}$ | 2   |     | 4    | ns               |
| Bandwidth  |                                  | BW       | 200 |     |      | MHz              |

## U 6792 B-D

### Functional Description

#### Amplifier stage

This data quantizer has a three stage limiting amplifier with an input common mode range of  $V_{EE} + 1.8\text{ V}$  to  $V_{CC} - 1.0\text{ V}$ . Maximum sensitivity is achieved through the use of a dc restoration feedback loop and ac coupling the input. When ac coupled, the input dc bias voltage is set by the limiting amplifier itself at about  $-2.1\text{ V}$ . The differential input requires two capacitors of equal value. For single ended operation, one of the coupling capacitors has to be connected to ground.

An external capacitor between  $P_{DEC}$  and  $N_{DEC}$  is used to store the internal offset voltage. The value of this capacitor is not critical. In order to avoid stability problems, the


value of this capacitor should be at least the same as the coupling capacitors.

#### Link Monitor

The link monitor function is implemented by the minimum signal discriminator and the threshold generator circuits. The purpose of this function is to monitor the input signal and to provide a status signal indicating when the input signal falls below or rises above a preset voltage level. This is done by peak detecting the output of the first stage of the limiting amplifier and comparing this level with the internal threshold voltage set by  $V_{THR}$ .

If  $V_{THR}$  is left open, the typical threshold level is  $2.85\text{ mV}$ . The on-chip reference voltage,  $V_{REG}$ , can be used to adjust the voltage at  $V_{THR}$  by dividing  $V_{REG}$  with a resistor string.

### Typical Application

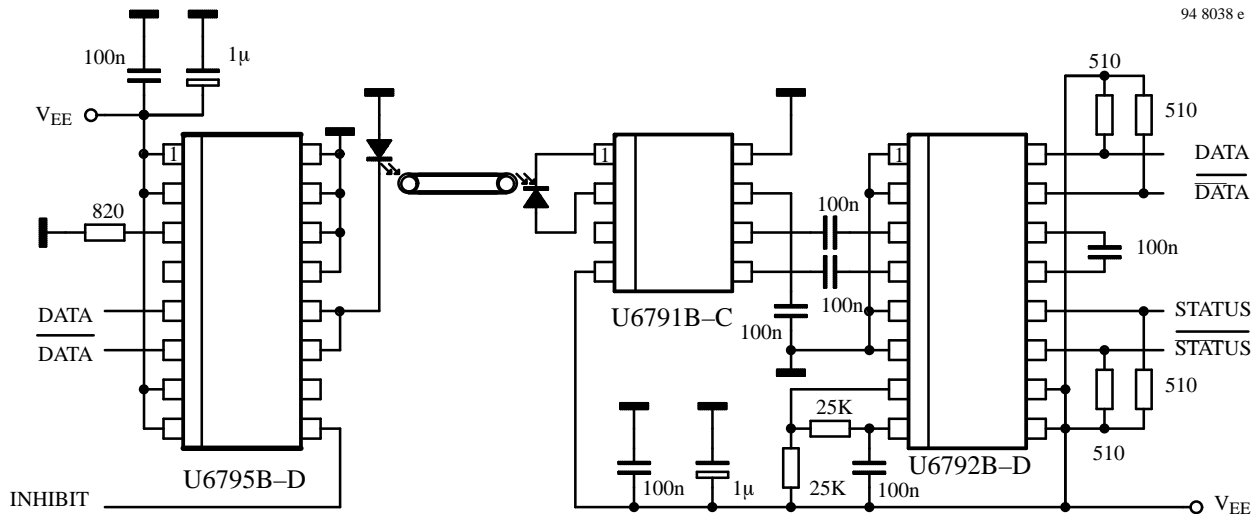

### Typical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ )


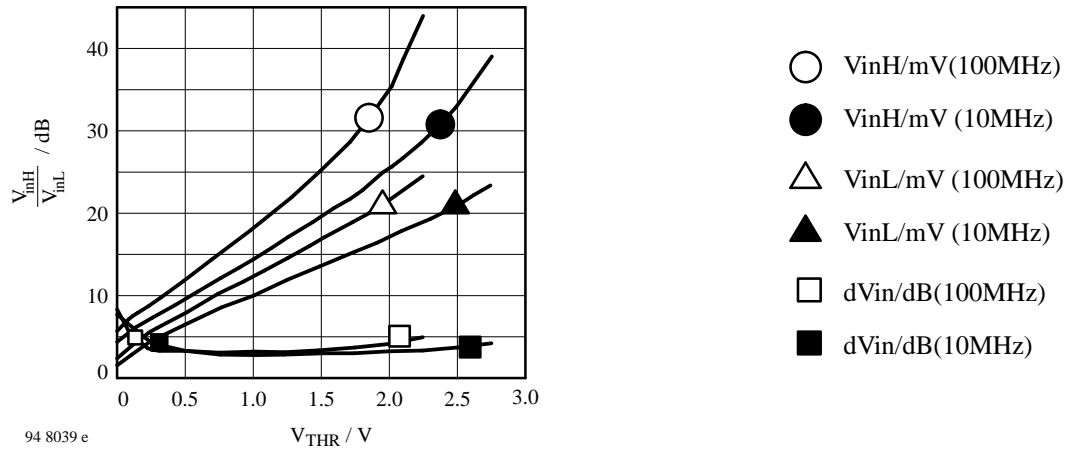


Figure 1. Threshold levels and hysteresis vs. threshold voltage

### Dimensions in mm

Package: SO 16

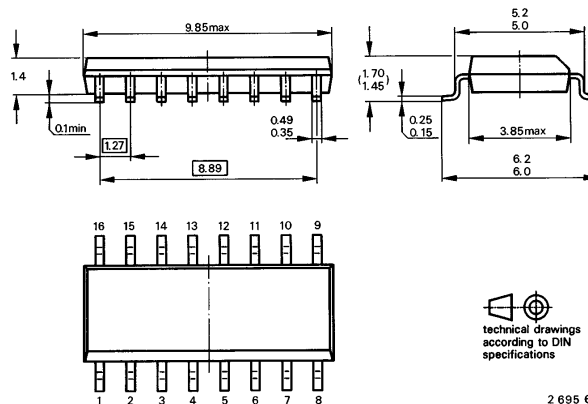

We reserve the right to improve technical design

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany