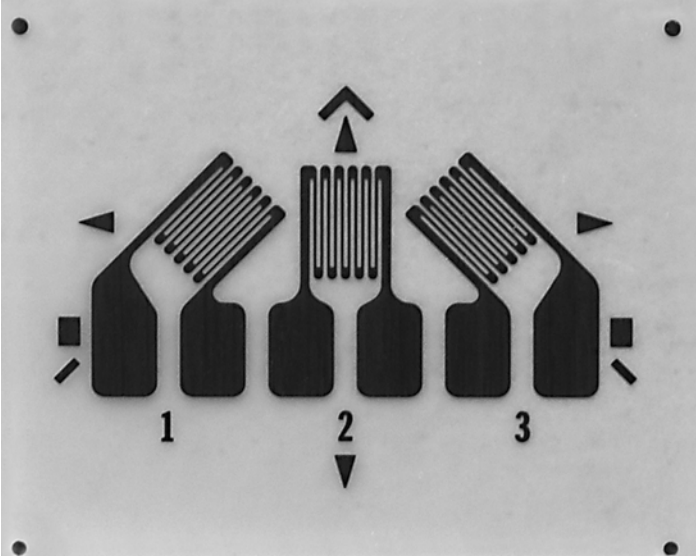


General Purpose Strain Gages - Rectangular Pattern

GAGE PATTERN DATA			
 <p style="text-align: center;">actual size</p>	GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
	EA-XX-031RB-120 EP-08-031RB-120 SA-XX-031RB-120	120 ± 0.4% 120 ± 0.4% 120 ± 0.8%	E, SE , L, LE
DESCRIPTION Miniature 45° rectangular single-plane rosette with compact geometry.			

GAGE DIMENSIONS					
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.031ES	0.085 CP	0.031 ES	0.175 CP	0.19	0.30
0.79 ES	2.16 CP	0.79 ES	4.45 CP	4.8	6.1

Legend: ES = Each Section CP = Complete Pattern S = Section (S1 = Sec 1) M = Matrix

 inch
 millimeter

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]

- Note 1:** Insert desired S-T-C number in spaces marked XX.
- Note 2:** Tolerance is increased when Option W, E, SE, LE, or P is specified.
- Note 3:** Products with designations and options shown in bold are not RoHS compliant.