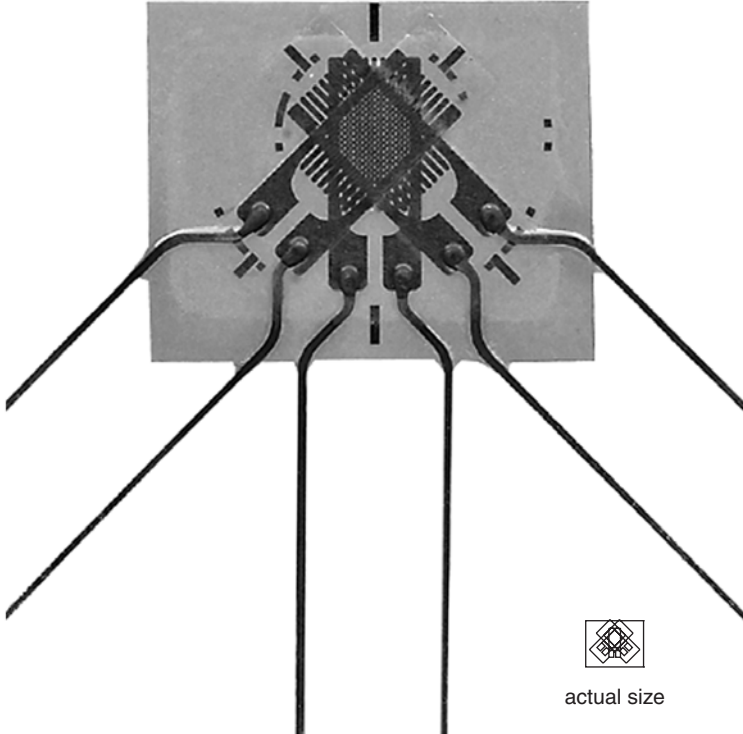


## General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
			<b>GAGE DESIGNATION</b> See Note 1, 2	<b>RESISTANCE (OHMS)</b>	<b>OPTIONS AVAILABLE</b> See Note 2
			<b>WA-XX-060WR-120</b> <b>WK-XX-060WR-120</b> <b>WK-XX-060WR-350</b> <b>WK-XX-060WR-10C</b> <b>SA-XX-060WR-120</b> <b>SK-XX-060WR-120</b> <b>SK-XX-060WR-350</b> <b>SK-XX-060WR-10C</b>	120 ± 0.5% 120 ± 0.5% 350 ± 0.5% 1000 ± 0.5% 120 ± 0.5% 120 ± 0.5% 350 ± 0.5% 1000 ± 0.5%	
			<b>DESCRIPTION</b> Small three-element 45° rectangular stacked rosette.		
<b>GAGE DIMENSIONS</b>		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.060 ES	0.24 M	0.060 ES	0.30 M	0.24	0.30
1.52 ES	6.1 M	1.52 ES	7.6 M	6.1	7.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

**Note 1:** Insert desired S-T-C number in spaces marked XX.

**Note 2:** Products with designations and options shown in bold are not RoHS compliant.