

## Single Point Stainless Steel Load Cell



### FEATURES

- Capacity range: 10 to 150kg
- Stainless steel construction
- Single point 400 x 400mm platform
- Sealed to IP66
- Compact size: only 40mm high
- OIML approved to C3 (20 - 100kg)
- Choice of mounting threads: ¼-20 UNC or M6 x 12

### OPTIONAL FEATURES

- EEx ia IIC T4 - ATEX hazardous area approval
- Grounded version includes shield wire in load cell cable

### DESCRIPTION

Model 1142 is a stainless steel single point load cell suitable for direct mounting with platform, bench, counting, and a wide range of other scale applications. Small physical size, combined with high accuracy and low cost, makes 1142 load cells the perfect choice for new or retrofit scale construction.

A humidity-resistant protective coating assures stable operation in damp environments over the entire compensated range and conforms to IP66 (IEC 60529).

Also available is an ATEX 2G EEx ia IIC T4 approved version for hazardous areas.


The six-wire cable includes two sense wires that compensate for changes in lead resistance due to temperature changes and cable extension.

Model 1142 options offer a choice of boltthreads, ¼-20 UNC or M6 x 12, and a grounded version that includes a “shield” wire in the load cell cable.

### APPLICATIONS

- Platform scales
- Bench scales
- Counting scales
- Grocery scales

### OUTLINE DIMENSIONS in mm

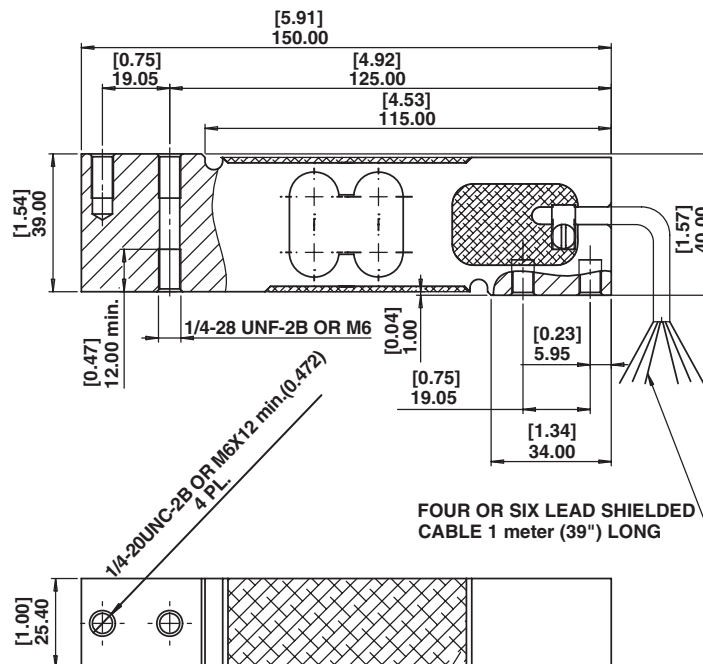

All DIMENSIONS IN mm [inches].


**SPECIFICATIONS**

PARAMETER	VALUE		UNIT
Rated capacity-R.C. ( $E_{max}$ )	10, 15, 20, 30, 50, 75, 100, 150**		kg
OIML Accuracy class	<b>Non-Approved</b>	<b>C3*</b>	
Maximum no. of intervals (n)	1000	3000	
$Y = E_{max}/V_{min}$	4000	15000	Maximum available
Rated output-R.O.	2.0		mV/V
Rated output tolerance	0.2		±mV/V
Zero balance	0.2		±mV/V
Zero Return, 30 min.	0.0500	0.0167	±% of applied load
Total Error	0.0300	0.0200	±% of rated output
Temperature effect on zero	0.0070	0.0023	±% of rated output/°C
Temperature effect on output	0.0030	0.0010	±% of applied load/°C
Eccentric loading error	0.0074	0.0049	±% of rated load/cm
Temperature range, compensated	-10 to +40		°C
Temperature range, safe	-20 to +70		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	300		% of R.C.
Excitation, recommended	10		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	385±10		Ohms
Output impedance	351±5		Ohms
Insulation resistance	>2000		Mega-Ohms
Cable length	1		m
Cable type	6 wire, PVC, single floating screen		Standard
Construction	Stainless steel		
Environmental protection	IP66		
Platform size (max)	400 x 400		mm
Recommended torque	Up to 30kg: 7.0 50kg & up: 10.0		N*m

\* 50% utilization

\*\* 10, 15 & 150 are not approved

**Wiring Schematic Diagram**  
(Balanced bridge temperature compensation)



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.