

Alloy Steel Double Ended Shear Beam



FEATURES

- Capacities 10K-75Klbs
- Low profile design for weigh bridge and silo applications
- Nickel plated alloy steel construction
- NTEP approved
- IP67 protection

OPTIONAL FEATURES

- EEx ia IIC T6 hazardous area approval
- FM approval available

DESCRIPTION

Model 4158 is a double ended shear beam load cell designed for high capacity silo weighing applications.

This high accuracy load cell is designed to meet NTEP standards. When combined with suitable mounting arrangements, this load cell will provide a simple, accurate and reliable weighing system.

Nickel plated and full environmental sealing assure long term reliability. For hazardous environments, this load cell has a EEX ia IIC T6 approved option.


When used in conjunction with Tedea-Huntleigh's custom designed mount, the unit combines ease of installation with both side load and lift-off protection.

APPLICATIONS

- Weigh bridges
- Tank and silo weighing

OUTLINE DIMENSIONS in millimeters

All dimensions in mm

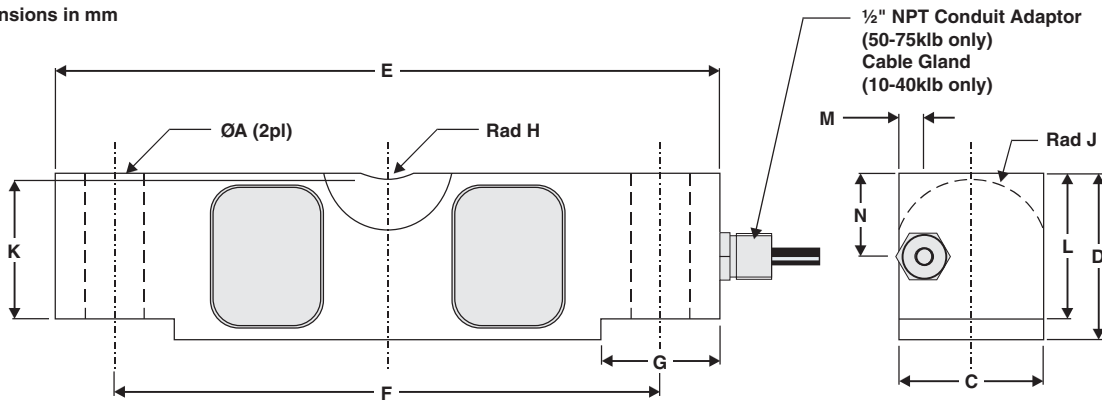


CAPACITY	ØA	C	D	E	F	G	Rad H	Rad J	K	L	M	N
10 - 25Klb	17.3	42.9	49.3	196.9	165.1	35.9	19.1	22.9	41.4	43.2	8.8	13.6
40Klb	20.6	49.3	62.0	260.4	215.9	49.0	25.4	28.5	50.8	53.3	9.0	31.0
50 - 75Klb	26.9	62.0	74.7	260.4	215.9	49.0	25.4	34.8	64.5	67.3	10.4	37.4

SPECIFICATIONS			
PARAMETER	VALUE		UNIT
Rated capacity-R.C. (E_{max})	10, 20, 25, 40, 50, 60, 75 ⁽¹⁾		Klbs
NTEP/OIML Accuracy class	NTEP	Non-Approved	
Maximum no. of intervals (n)	10000 III L	1000	
$Y = E_{max}/V_{min}$	12000	4000	Maximum available
Rated output-R.O.	3.0		mV/V
Rated output tolerance	0.075		±mV/V
Zero balance	0.09		±mV/V
Zero Return, 30 min.	0.030	0.050	±% of applied load
Total Error	0.030	0.050	±% of rated output
Temperature effect on zero	0.0013	0.0067	±% of rated output/°C
Temperature effect on output	0.0025	0.0040	±% of applied load/°C
Temperature range,	-10 to +40		°C
Temperature range, safe	-30 to +70		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	300		% of R.C.
Excitation, recommended	10		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	780±20		Ohms
Output impedance	705±5		Ohms
Insulation resistance	>1000		Mega-Ohms
Cable length	7.5		m
Cable type	6 wire, braided, PVC, dual floating screen		Standard
Construction	Nickel plated alloy steel		
Environmental protection	IP67		

Note

⁽¹⁾ 10Klbs is not approved by NTEP

Wiring Schematic Diagram



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.