

## Wireless Remote Hand Held Unit



### DISPLAY

- Gross weight
- Net weight
- Zero display
- Adjustable brightness and contrast

### FEATURES

- Rechargeable
- Printer command
- Supports English and French menus
- Signal strength indicator
- Low voltage indicator
- Multiple channels
- Backlight
- Wireless licence exempt
- High environmental protection
- Works with 1155, 1200 and 1300 indicators

### DESCRIPTION


The 511 FreeWeigh is a wireless remote hand held unit with rechargeable batteries. It is compatible with both the 1155 and 1300 indicators allowing the user to view the Gross/Net weight up to 50 meters away from the system indicator.

The unit supports menus in English and French and operates in the 868MHz frequency range and complies with the world-wide wireless ISM license-free regulations. 15 channels can be selected to ensure co-existence with other wireless systems. All displayed data may be printed by the in-cab printer.

### APPLICATIONS

- Suitable for 1155, 1200 and 1300 applications

### SYSTEM BLOCK DIAGRAM

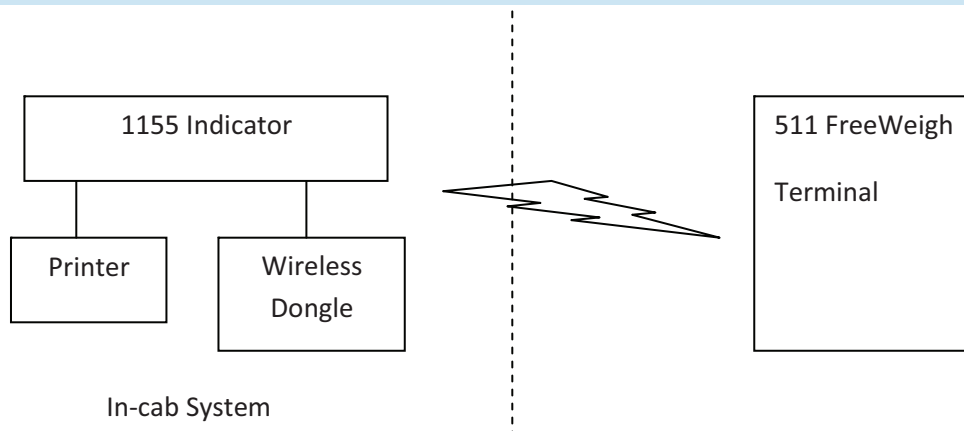

### Wireless Remote Hand Held Unit

<b>SPECIFICATIONS</b>				
<b>PARAMETERS</b>	<b>MINIMUM</b>	<b>TYPICAL</b>	<b>MAXIMUM</b>	<b>UNIT</b>
<b>SYSTEM</b>				
Channels	15 total - A to O			
Range	Up to 50 meters in open terrain			
Frequency	868, complies with the European license free ISM band regulations			MHz
<b>HAND-HELD UNIT</b>				
Size	113 x 82			mm
Operating temperature	0		+50	°C
Dot pitch	0.364 x 0.433			mm
Viewing area	50.6 x 31.0			mm
Nominal voltage level	3.7			Vdc
Low voltage level	3.6			Vdc
Minimum voltage	3.3 (with reminder on screen)			Vdc
Max charging voltage	4.2			Vdc
Charging time	Three hours approximately, discharged to full			
Battery type	Nichel Metal Hydride rechargeable - ruggedized			
Backlight	8 seconds per button push			
Protection rating	IP66			
<b>ACCESSORIES AND OPTIONS</b>				
Used with	1155, 1200 and 1300 indicators			
Languages	English and French			

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.