

## Platform Load Cell



### FEATURES

- Rated capacities of 25 to 100 pounds, 6 to 60 kilograms
- Stainless steel, welded seal construction
- Moment-compensated design for minimal sensitivity to moments induced by off-center loading
- Replacement for RTI model HPS and compatible load cells
- Exceeds NIST H-44 performance requirements
- Provides optimum performance under adverse loading conditions
- *Sensorgage™* sealed to IP67 standards
- *Cell Guard™* two year warranty
- Factory Mutual System Approved for Classes I, II, III; Divisions 1 and 2; Groups A through G. Also, non-incendive ratings (No barriers!).

### DESCRIPTION

The 60064 is a low profile high precision, hermetically sealed, stainless steel single point platform load cell.

This product's advanced welded seal make ideal for use in extremely harsh conditions. This load cell is most commonly used in platform scales, but can be adapted for use in many process weighing applications.

This load cell is specifically designed for use in corrosive and wet environments that


are not appropriate for other stainless steel load cells.

This product is rated intrinsically safe by the Factory Mutual System (FM); making it suitable for use in potentially explosive environments.

### APPLICATIONS

- Single-point platform scales
- Bench, counting and deli scales
- Checkweighing scales
- Hopper scales and netweighing
- Belt conveyor scales

### OUTLINE DIMENSIONS in inches [mm]

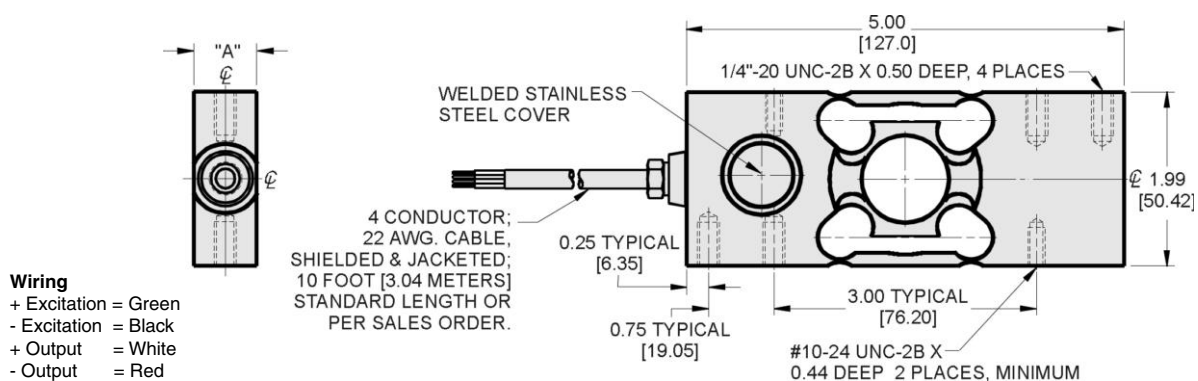

CAPACITY	A	DEFLECTION	WEIGHT
25 - 50 lbs	0.72	0.011	1.7
100 lbs	0.94	0.014	2.1
[6 - 15 kgs]	[18.3]	[0.007]	[0.8]
[60 kgs]	[23.9]	[0.009]	[1.0]

Capacities are in pounds [kg/t]. Deflection is ± 10%. Certified drawings are available.

### SPECIFICATIONS

PARAMETER	VALUE		UNIT
Rated capacities	25, 50, 100		lbs
	6 kg, 15 kg, 60 kg		kgs/metric tons
Full scale output (FSO)	lbs	[kgs/metric tons]	mV/V
	$3.0 \pm 0.25\%$	$2.0 \pm 0.25\%$	
Accuracy class	Standard		
Max. no. of verification intervals	--		
Combined error	$\leq 0.03$		% FSO
Nonlinearity	$\leq 0.03$		% FSO
Hysteresis	$\leq 0.02$		% FSO
Creep error (20 minutes)	$\leq 0.03$		% FSO
Temperature effect on zero	$\leq 0.0015$		% FSO/°F
Temperature effect on output	$\leq 0.0008$		% of load/°F
Non-repeatability	$\leq 0.1$		% FSO
Zero balance	$\leq 1.0$		% FSO
Insulation resistance at 50 VDC	$> 1000$		MΩ
Compensated temperature range	0 to 150 (-15 to 65)		°F (°C)
Operating temperature range	-65 to 185 (-50 to 85)		°F (°C)
Storage temperature range	-65 to 185 (-50 to 85)		°F (°C)
Input resistance	400		Ω nominal
Output resistance	347 - 353		Ω
Recommended excitation voltage	10		VDC
Maximum excitation voltage	15		VDC
Safe overload	150		% of rated capacity
Ultimate overload	200		% of rated capacity
Sealing	IP67		
Material	17-4 Stainless steel		
Moment compensation			
Moment sensitivity	$\leq 0.01$		% of applied load/inch
Platform size	10 x 10		inches
Maximum moment	5 x capacity		lbs-inches

All specifications subject to change without notice.

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.