

Portable Strain Gage Welding and Soldering Unit



FEATURES

- Separate visual and audible indicators monitor welder status - Weld energy is continuously adjustable from 3 to 50 joules, making the Model 700 an excellent choice for installing weldable strain gages and temperature sensors, as well as small thermocouples and light-gauge metal.
- Supplied with a lightweight soldering pencil - A front-panel control adjusts soldering tip temperature for a wide range of soldering applications in the field or in the laboratory.
- “Low-battery” light to warn the user when the internal, sealed lead-acid battery requires charging - A battery charger is included to provide for full battery charge with no danger of overcharging. Indicator lights monitor battery charge rate.
- Convenient storage space for cables, battery charger and instruction manual.

GENERAL SPECIFICATIONS

Overall Size:

9 L x 9 W x 9-3/4 H-in [230 x 230 x 250mm].

Weight:

21lb [9.5kg].

Power for Recharging:

115Vac or 230Vac, 50-60Hz. Uses external AC transformer (provided).

Operating and Storage Temperature Range:

0° to +120°F [-20° to +50°C].

WELDING SPECIFICATIONS

Weld Energy Range:

3 to 50 joules, continuously adjustable by front-panel control. Maximum open-circuit voltage less than 25Vdc.

Maximum Weld Repetition Rate:

20 per minute at 30 joules, typical.

Number of Welds per Battery Charge:

Approximately 2000 at weld energy setting of 30 joules. This is equivalent to 40 Micro-Measurements weldable gage installations.

Battery Charge Time: (from full discharge)

12 hours to 75% full charge; 18 hours to full charge.

Battery:

One sealed, rechargeable lead-acid (non-liquid) type, 12 volt, 5 ampere-hour.

Welding Probe:

Manually fired with trigger control and “steady-rest.”


Welding Cables:

Two 5 ft [1.5m], fully flexible.

Weld Energy Monitor:

Calibrated front-panel control with READY and WAIT indicators; audible indication selectable.

Portable Strain Gage Welding and Soldering Unit

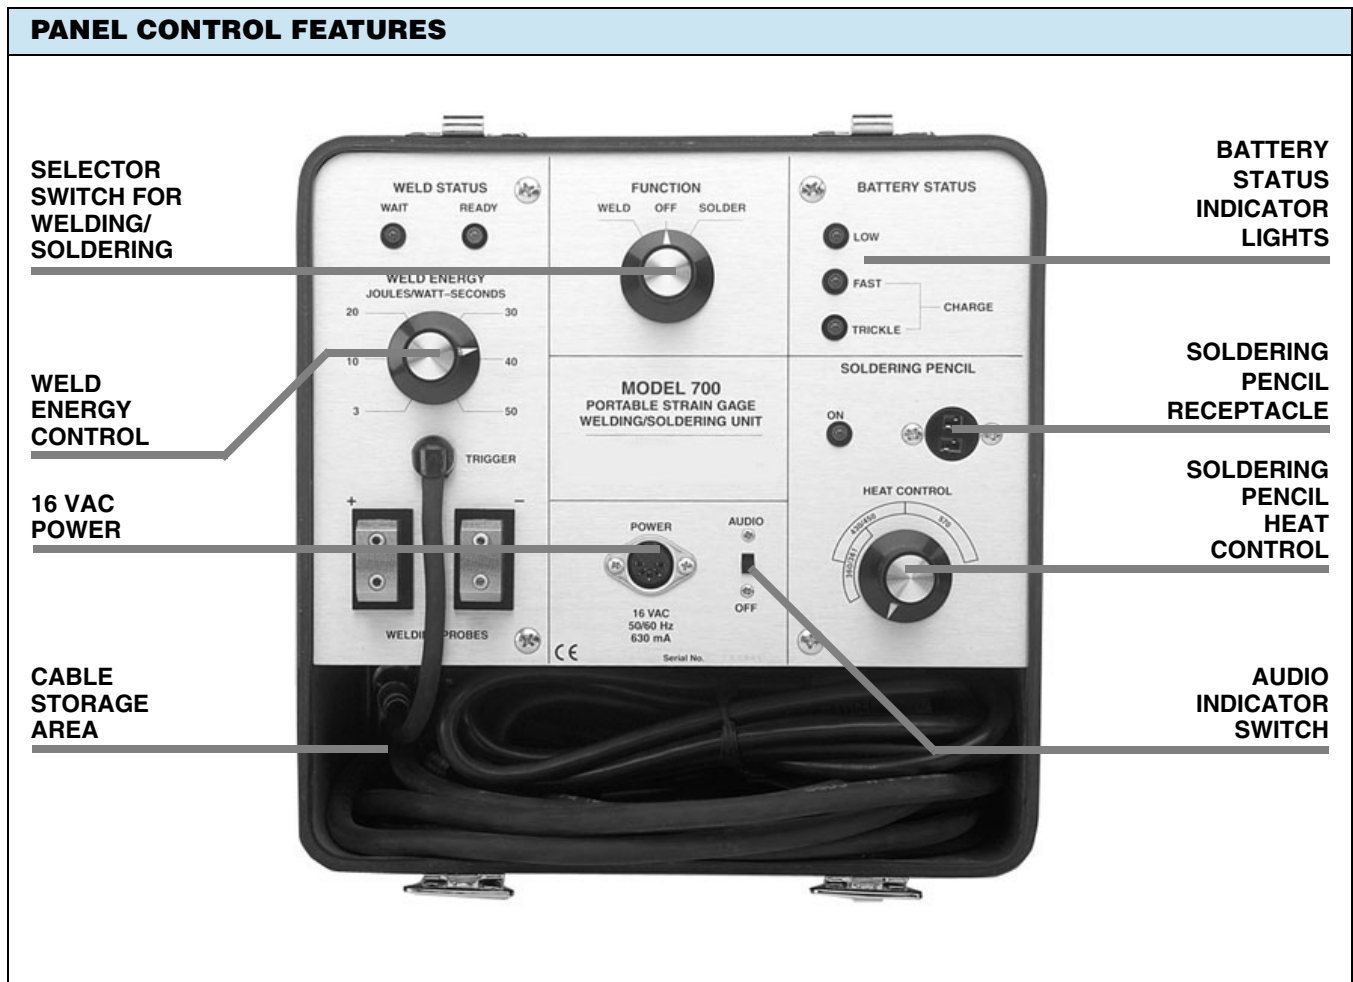

SOLDERING SPECIFICATIONS

Temperature Control:

Continuously variable with bands indicating melting range of solders.

Soldering Pencil:

1.1 oz [31 gm], rated at 25 watts, 12 volt operation. Tip temperature adjustable from +200° to +900°F [+90° to +480°C].

Soldering Duration:

4 hours using +361°F [+183°C] melting point solders (with initial full charge).

Accessory:

Model 700-A103 Spot Welding Probe Set:

Recommended for spot welding instrument leadwires to ZC-Series high-temperature gage ribbons.

All specifications are nominal or typical at +23°C unless noted.

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.