

## Low Profile Shear Force Load Cell



### DESCRIPTION

The model CLC is a very low profile load cell, working according to the shear force principle (no membrane), ideally suited for applications in harsh environments.

Due to the special design, the CLC load cell is insensitive against side loading and other interfering effects.

Because of the high operating temperature range of -40 up to +125°C, the CLC load cell is suitable for use in steel mills and foundries.

Due to the high repeatability and high long-term stability, the load cell supplies very good results, even after perennial use.

Protection class IP67 gives an excellent protection against dust and moisture.

### FEATURES

- Capacity 25, 50t, 100t and 200t
- Other capacities on request
- Very low profile
- High long-term stability and repeatability
- Operating temperature range -40 to +80°C (+125°C with optional Teflon Cable)
- 10m special cable. Option: Load cell with connector
- Yellow chromate steel
- Protection class IP67


### OPTIONS

- Load Cell can be customized to a large variety in dimensions and capacities
- Customised adaptor plates and other mounting assemblies on request

### APPLICATIONS

- Silo and hopper weighing
- Tundish weighing
- Various applications in steel mills and foundries
- Industrial applications

### OUTLINE DIMENSIONS in mm

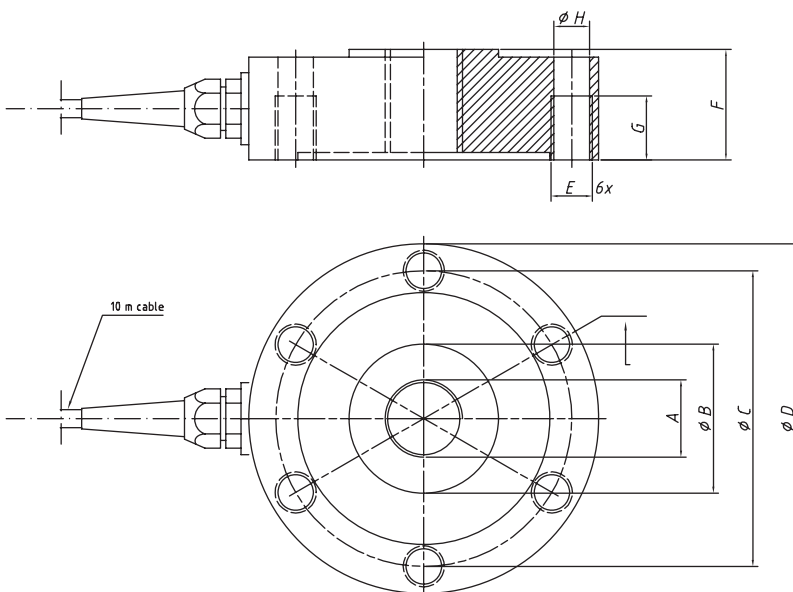

DIM.	25t	50t	100t	200t
A	M30 x 1,5	M30 x 1,5	M40x1,5	M55x1,5
B	58	58	85	120
C	115	115	164	220
D	136	136	195	263
E	M16	M16	M20	M24
F	43	43	58	67
G	25	25	30	40
H	13,5	13,5	18,5	21

<b>SPECIFICATIONS</b>					
<b>PARAMETER</b>	<b>VALUE</b>				<b>UNIT</b>
Rated capacity (R.C.) <sup>(1)</sup>	25	50	100	200	t
Rated output (C)	about 1.0				mV/V
Total error	<0.1				± % of C
Temperature effect: on zero	0.005				± % of C/°C
Temperature effect: on output	0.005				± % of C/°C
Nominal temperature range	-10 to +80				°C
Operating temperature range	-40 to +80 (+125 on request)				°C
Safe overload	200				% of R.C.
Ultimate overload	>300				% of R.C.
Max. admissible side load	50				% of R.C.
Recommended excitation	10				V DC or AC
Max. supply voltage	36				V DC or AC
Input impedance	750±15				Ω
Output impedance	700±10				Ω
Insulation impedance	>2000				MΩ
Material	yellow chromate steel				
Environmental protection	IP67				

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.