


## High-Performance Digital Load Cell Interface

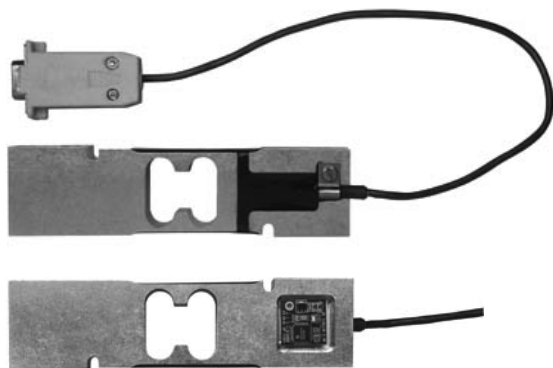

### DESCRIPTION

The Model DLC08 is a high-performance, digital load cell interface for precision measurement of strain gage transducers. With DLC08 technology, any analog load cell can be converted to a full-function digital load cell. The interface circuit board can either be embedded in the load cell (space permitting), or installed in a 9 pin “D” type connector at the load cell cable end.

Simple RS-485 wiring connects the DLC08 to any PC, PLC, or DCS device. All calibration and operating procedures are fully documented on the accompanying installation CD ROM. Open architecture DLC08 software provides instant access to all configuration and calibration parameters.

DLC08-enabled summing junction boxes offer digital interfacing for multiple load cell scales via an RS-485 bus.

### FEATURES

- Serial interface (RS-485)
- All settings made through the serial interface
- Simple calibration, test and setting via HyperTerminal programming, or via Revere’s software
- Automatic unit conversion, zero tracking
- Gravity factor compensation
- Tare function
- Suitable for PC-base,  $\mu$ C, PLC application
- Weight result format: six digits, eight annunciators
- Up to 64 nodes
- ESD protection up to 15kV

### APPLICATIONS

- OEM machinery
- Load cell digitizers
- Inventory and level control

### OPTIONALS

- USB interface
- Tilt sensor

## High-Performance Digital Load Cell Interface

<b>SPECIFICATIONS</b>					
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>MIN</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Bridge input					
Bridge excitation	$V_{exc}$	4.8	5.0	5.2	V
Bridge resistance	$R_{LC}$	315	350		$\Omega$
Full scale input sensitive	$F_S$				
PGA = 1				3.50	mV/V
PGA = 2				1.85	mV/V
PGA = 4				0.90	mV/V
PGA = 8				0.45	mV/V
Common mode voltage		1.50	2.50	3.50	V
Input impedance		$10^9$			$\Omega$
Digital Bus - RS-485 protocol defined by Revere					
Baud rate			19,200		Bit/sec
Communication mode		Point-to-point or RS-485 multi-drop communication			
Built-in termination resistor			8,870		$\Omega$
Cable length (with suitable $R_t$ )				1,000	m
Performance					
Internal resolution			24		Bits
Noise (Ref to input, filter 4/4/4)				0.30	$\pm\mu V$ rms
Digital filters		3 filters, software selectable			
Nonlinearity (in $T_S$ )			0.008	0.011	% $F_S$
Sample rate	$C_S$		15		Hz
Zero stability (in $T_S$ )			10	15	$\pm ppmF_S/^\circ C$
Span stability (in $T_S$ )			1.6	2.3	$\pm ppmF_S/^\circ C$
Environmental conditions					
Specification temperature (Full performance)	$T_S$	-10	+20	+40	$^\circ C$
Operating temperature		-40		+85	$^\circ C$
Storage temperature		-40		+85	$^\circ C$
Power supply - DC only					
Supply voltage	$V_p$	7.5	12	15	V
Supply current			32	45	mA
Maximum rating power supply ( $T \leq 500$ ms)				30	V
Reverse power protection				-60	V

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.