

Advanced Process Control Instrument Family

DIN-Rail Mount Unit



FEATURES

- DIN Rail mount
- Modular system with flexible configuration
- Up to 6 weighing / force measurement channels per unit
- Synchronized sampling of all channels
- Fast update rate - up to 800 updates per second
- Easy access to service and control panel
- Integrated flexible digital I/O
- Communication: Ethernet, Profibus, DeviceNet, Modbus, USB, RS485, RS232, Modbus/TCP
- Easy parameter backup and restoration via USB port or internal memory

DESCRIPTION

The Nobel - BLH G4-RM family of process control instruments offers high speed, high performance control for industrial weighing and force measurement applications plant wide. G4-RM units set new standards geared for today's application demands and tomorrow's expanding requirements.

G4-RM instruments accommodate up to three different, easily installed, modules for advanced performance, more functional channels, custom applications, or repair. This provides customers with a highly flexible, upgradeable, single instrument system capable of weighing up to six independent vessels or scales. For web tension applications, up to six zones (rolls) can be monitored simultaneously. Inputs and

outputs can be configured according to customer requirements.

A wide variety of industrial communication interfaces are available; Profibus, DeviceNet, Modbus TCP, Ethernet, USB, RS485, and RS232.

Software upgrades can be downloaded to the instrument from our website, or be transferred to the G4-RM unit via a standard USB port connection.


Custom software designed to customer requirements for special applications is available upon request.

DIN Rail mount units are rated IP20. Power supply is 24V DC.

APPLICATIONS

- Process weighing and control
- Force measurement
- Web tension measurement and control
- Automation
- Force vector calculations
- High dynamic force measurement
- High speed batching/blending systems

CONFIGURATION

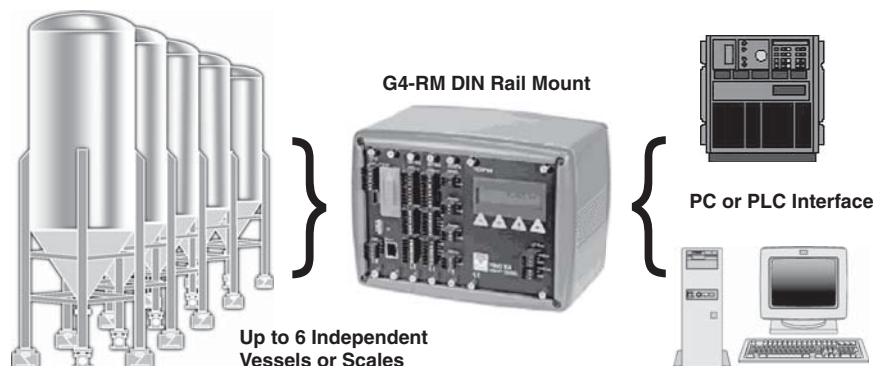

SPECIFICATIONS

Enclosure types	DIN Rail mount
Dimensions WxHxD	229 x168 x145mm
Enclosure design	Aluminum housing
Environmental	
Temperature range	
Rated performance	-10 to +50°C
Storage	-25 to +85°C
Protection	IP20
EMC, RF	CE (Industrial), UL, cUL
Display	2 x16 character LCD with backlighting
Keyboard	4 membrane keys
Power	DC SUPPLY module
Voltage and Power	19-29VDC, 40W
CPU module:	
Interfaces:	All are isolated
RS232 and RS485, ports	For process data and control
Protocol	Modbus RTU
Baud rate	Up to 115 kbaud
USB, supported units	Version 1
Keyboard	USB keyboard for PC
Memory stick	USB type for PC For backup and restore of set-up parameters. For change to a new program version
Ethernet	For process data and control
Protocol	Modbus TCP
Field bus or Industrial Ethernet, Optional	For process data and control
Available field busses	Profibus or DeviceNet. CANbus, Ethernet/IS, ProfiNet and other on demand!
WF IN1 (1 input) and WF IN2 (2 inputs) Weight/Force input modules:	
Max. # of load cells	8 per channel
Excitation voltage:	5VDC
A/D conversion:	3.9kHz, 16 000000 units (24 bits)
Input range	±7mV/V
Update rate:	1 up to 300 readings per second
No. of weight channels:	Up to 6 channels
Sensitivity:	0.1µV
Zero drift:	<10nV/V/K
Span drift:	<2ppm/K
Digital I/O	4 inputs, 24V, isolated with common return 2 outputs, 24V, max 100mA, isolated with common return

SPECIFICATIONS cont.

HS WF2 High speed Weight/Force Input module:	
Max. # of load cells	4 per channel
Excitation voltage:	10VDC
A/D conversion	20kHz, 16 000000 units (24 bits)
Input range	±4.5mV/V
Update rate:	6 up to 800 readings per second
No. of weight channels:	2 or 4 channels
Sensitivity:	0.1µV
Zero drift:	<10nV/V/K
Span drift:	<2ppm/K
Digital I/O	4 inputs, 24V, isolated with common return 2 outputs, 24V, max 100mA, isolated with common return
DIO8 module, Digital Input and Output module:	
Separate I/O module	2 units can be used
Type	8 inputs, 24V, isolated with common return 8 outputs, 24V, max 100mA, isolated with common return
AOUT1 (Q4) / AOUT4 Analog output modules:	
Number of channels	1 or 4, separately isolated channels
Resolution	65000 units, 16 bits
Voltage output	0 - 10V, -10 to 10V, >1kohm load
Current output	4 - 20mA, 0 - 20mA, -12 - 20mA or -20 - 20mA <500 ohm load
Update rate	Analog input update rate, adjustable smoothing filter

Ordering Information

G4-DR-FB-S1-S2-S3-P

G4	Instrument type	G4	
DR	Enclosure type	DR	DIN Rail mount
FB	Fieldbus interface	0	None
		P	Profibus
		D	DeviceNet
Si	Slot 1 to 3 type	0	Blank
		1	HSWF1 - High speed weight/force, single input module
		2	HSWF2 - High speed weight/force, dual input module
		3	WFIN1 - Weight/Force, single input module
		4	WFIN2 - Weight / Force, dual input module
		5	TBD
		6	AOUT1 - Analog output single channel
		7	AOUT4 - Analog output, 4 channels
		8	DIO8 - Digital input and output module
V	User interface and power	V	Viewpan, 24VDC

Example: G4-DR-0-4-8-0-V

Where:

- G4 instrument (G4)
- DIN Rail mount (DR)
- No field bus (0)
- Slot 1 = WF1 (4)
- Slot 2 = DIO8 (8)
- Slot 3 = Blank (0)
- Power = Viewpan (V)

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.