


Protective Coating



OTHER M-LINE COATINGS COMPATIBLE WITH GAGEKOTE #1:

- Gagekote #5
- Epoxylite #813

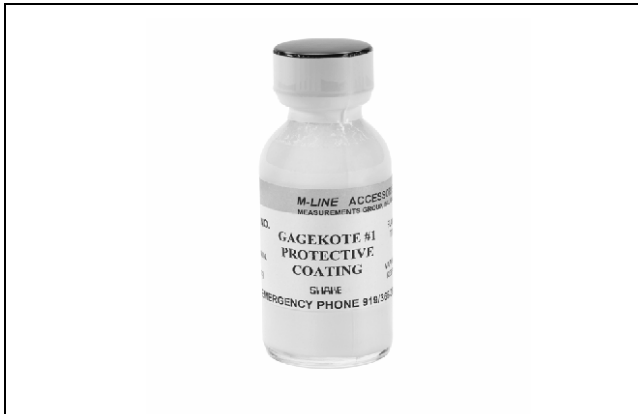

RoHS
COMPLIANT

DESCRIPTION

Solvent-thinned (toluene) synthetic resin. Often used as a precoat for Gagekote #5, and Epoxylite #813. Resistant to

moisture and offers a wide operating temperature range. Provides limited mechanical protection. Convenient to use.

CHARACTERISTICS

Operating Temperature Range:

-320° to +850°F [-195° to +455°C].

Shelf Life:

Minimum 2 years at +75°F [+24°C].

Cure Requirements:

Single coat air dry for 15 minutes at +75°F [+24°C]. Prior to encapsulation by other coatings, air dry 4 hours at +75°F [+24°C] or 30 minutes at +150°F [+65°C] to prevent solvent entrapment.

PACKAGING OPTIONS

Kits:

1 brush-cap bottle [1oz/30ml]

12 brush-cap bottles [1oz/30ml each]

1 bottle [8oz/240ml each]

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.