

## Single Point Load Cell



### FEATURES

- Capacities: 6 - 60kg
- Fully welded, stainless steel construction
- Hermetically sealed, IP66 and IP68
- Certified to OIML R-60, 3000d
- Comprehensive mounting hole facility
- Moment insensitive, platform size to 350 x 350mm

### OPTIONAL FEATURE

- ATEX and FM certified versions are available for use in potentially explosive atmospheres

### DESCRIPTION

The HPS is a unique fully welded all stainless steel single point (moment insensitive) load cell.

This product is suitable for low capacity platform scales, multi-head packaging machines, check weighers, loss-in-weight feeders, belt scales and general process weighing applications.


The unique construction ensures that this product can be used successfully in harsh environments found in the food, chemical and allied industries.

This product meets the stringent Weights and Measures requirements throughout Europe.

### APPLICATIONS

- Food platforms
- Process weighing
- Multi-head packaging machines
- Marine hybrid scales

### OUTLINE DIMENSIONS in mm

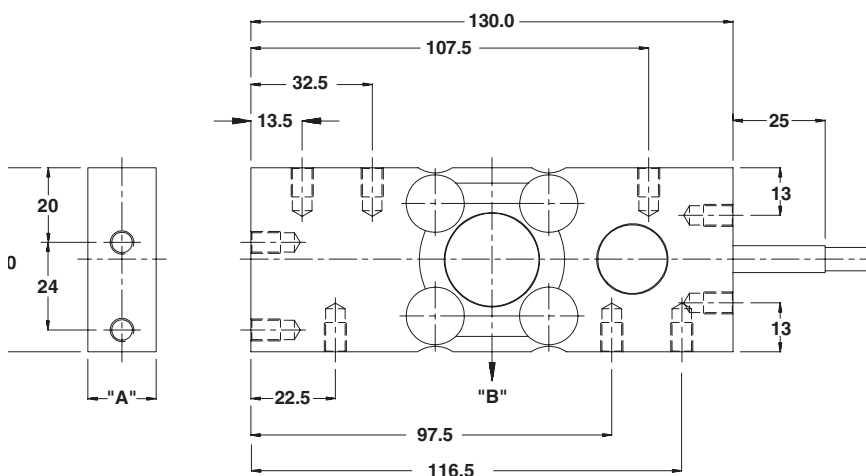

#### Cable specifications:

- Cable length: 7m
- Excitation + Green  
Excitation - Black  
Output + White  
Output - Red  
Sense + Yellow  
Sense - Blue  
Shield Transparent
- Cable screen is not connected to load cell body.

Capacity (kg)	6, 12, 30	60
A	18.5	23.5
B	Central load axis	
Max. recommended platform size 350mm		
All threads M6x1 (8 Deep)		

### SPECIFICATIONS

PARAMETER	VALUE		UNIT
Standard capacities ( $E_{max}$ )	6, 12, 30, 60		kg
Accuracy class according to OIML R-60	Non-Approved	C3	
Max. no. of verification intervals	3000		
Min. verification interval ( $V_{min}$ )	$E_{max}/12000$		
Rated output ( $=S$ )	2		mV/V
Rated output tolerance	0.2		±mV/V
Zero balance	1.0		±% FSO
Combined error	0.0500	0.0200	±% FSO
Non-repeatability	0.0200	0.0100	±% FSO
Minimum dead load output return	0.0500	0.0167	±% applied load
Creep error (30 minutes)	0.0600	0.0245	±% applied load
Temperature effect on min. dead load output	0.0250	0.0058	±% FSO/5°C (°F)
Temperature effect on sensitivity	0.0250	0.0045	±% applied load/5°C (°F)
Eccentric load effect*	0.03		±% FSO
Minimum dead load	0		% $E_{max}$
Maximum safe over load	150		% $E_{max}$
Ultimate over load	300		% $E_{max}$
Maximum safe side load	100		% $E_{max}$
Deflection at $E_{max}$	0.24±0.02/ 0.19±0.01/ 0.15±0.01/ 0.22±0.03		mm
Excitation voltage	5 to 12		V
Maximum excitation voltage	15		V
Input resistance	400±6	410±6	Ω
Output resistance	350±7		Ω
Insulation resistance	≥5000		MΩ
Compensated temperature range	-10 to +40		°C
Operating temperature range	-40 to +80		°C
Storage temperature range	-40 to +90		°C
Element material (DIN)	Stainless steel 1.4542		
Sealing (DIN 40.050 / EN60.529)	IP66 and IP68		
Recommended torque on fixation bolts	6		N*m

\* Applies at 50% x Rated Load at 150mm radius

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.