

Dual Axis Web Tension Transducer



FEATURES

- Capacities from 2K to 20K pounds (9 to 89 kN)
- Dual axis transducer design enables measurement of resultant force in all directions without limitation to horizontal or vertical components
- Functional to 250°F (121°C)
- Sealed to IP67 - field proven design
- Low profile - direct load cell replacement with simple retrofit installation
- Factory calibrated for minimum start-up time


DESCRIPTION

Patented HTU Web Tension Transducers measure web tension forces applied across a roll, using integral horizontal and vertical axis sensors. This innovative and exclusive two-dimensional approach to web tension force measurement enables accurate determination of the true resultant force, as well as the applied angle. Not only does this permit installation and measurement at any mounting angle or roll orientation, it also combines to form an expert diagnostics system that produces the highest level of web tension measurement confidence available today.


The Model HTU is machined from a high strength corrosion resistant stainless steel to yield a low profile single piece construction that incorporates tubular sensing sections at each end. Two full Wheatstone Bridges are mounted internally to each sensor and provide output signals in the X and Y plane that are externally, vectorially summed to determine the magnitude and direction of the resultant force. Each bridge is functional to 250°F (121°C), and dead weight calibrated for precision accuracy. The cylindrical sensing sections are sealed to meet IP67 requirements. Environmental sealing ensures long-term reliability for humid, wet, or washdown locations.

APPLICATIONS

Paper and Roofing Machines

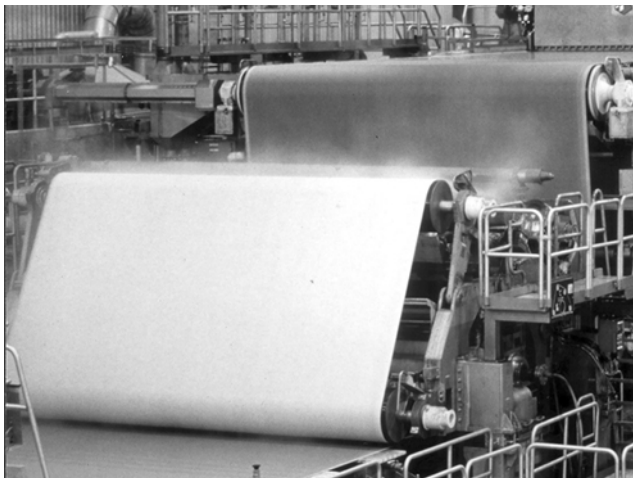

Strip Mill Force Measurement


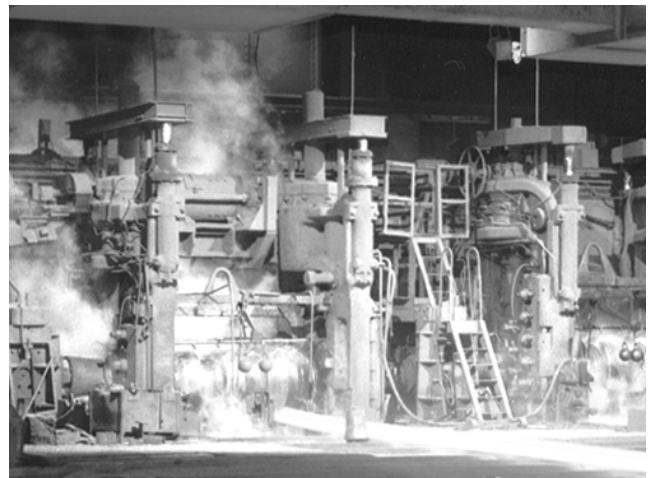


HTU DESIGN ADVANTAGES

The HTU Load Cell incorporates a symmetrical, universal design that measures the resultant force F_R and angle θ of any web tension system, independent of wrap angle, with a horizontal or vertical installation. Special orientation or the selection of a horizontal or vertical transducer is not required.

Force sensing elements located on each end of the transducer measure the components F_x and F_y of F_R applied along the X and Y axes. Resultant output signals can be used to determine the magnitude and direction (θ) of the overall force (F_R) applied by the web. Two full Wheatstone Bridges are mounted internally to each tubular cross section to provide independent sensing for each axis as well as protection from hostile environments.

HTU transducers are typically installed beneath the pillow blocks using top and bottom adapter plates. These plates mount on integral loading surfaces designed to produce shear forces in the sensing element. Loading surfaces are located on either side of the longitudinal center slot and include drilled and counterbore holes to maintain a low profile assembly.

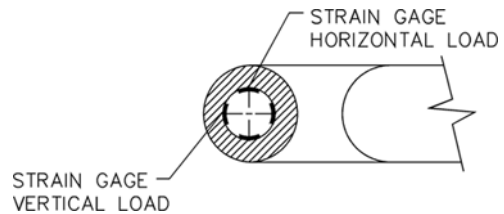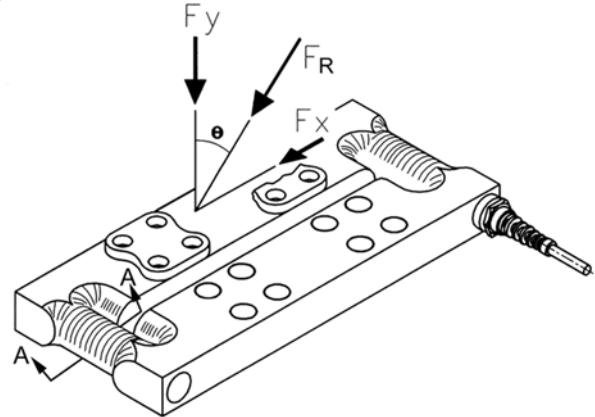

Force sensing gage diagram (for both ends of module)

SPECIFICATIONS

Performance (% Rated Output)

Available Capacities	2K, 6K, 10K, 20K lb (9, 27, 45, and 89 kN)
Rated Output (RO)	2.0 mV/V (X & Y bridges)
Repeatability	0.02% RO
Combined Error (best fit)	0.10% RO
Zero Balance	1.0% RO
Creep (20 Minutes)	0.05% RO
Temperature Effects:	
Zero Balance	0.0025% RO/°F (0.0044%/°C)
Output- % Reading	0.0050% RO/°F (0.0089%/°C)

Electrical

Excitation Voltage	10 Vac-dc recommended 15 Vac-dc maximum
Input Resistance	185 ±10.0 ohms (all channels)
Output Resistance	500 ±5.0 ohms (per channel)
Connection	high temp., 6-Cond. Cable, 33 feet (10 meters)

Temperature

Safe Temp.	--0 to +300°F (-18 to +149°C)
Service Temp.	--0 to +250°F (-18 to +121°C)

Adverse Load Ratings

Safe Load	150% rated capacity
Ultimate Load	300% rated capacity
Safe Sideload	100% capacity @ 12 in. (304 mm) C/L height
Ultimate Sideload	300% rated capacity

Material

HTU Cell	17-4PH stainless steel
Adapter Plates	mild or stainless steel

Sealing


Environmental Rating	IEC IP67
----------------------	----------

Deflection

2000 lb Unit	0.007 inches (0.17 mm)
all others	0.035 inches (0.89 mm)


Weight and Mounting

Weight	all capacities - 18 lb (8.2 kg)
Mounting	horizontal or vertical

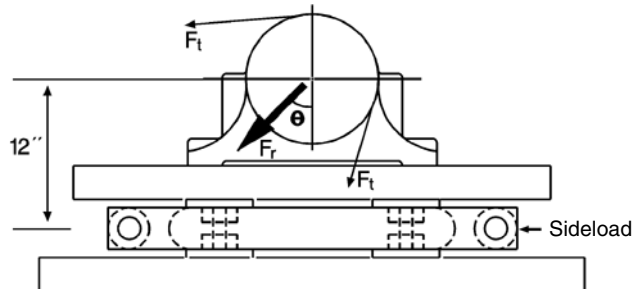

Safe sideload at centerline height

OUTLINE DIMENSIONS: 2000 LB (9 kN)

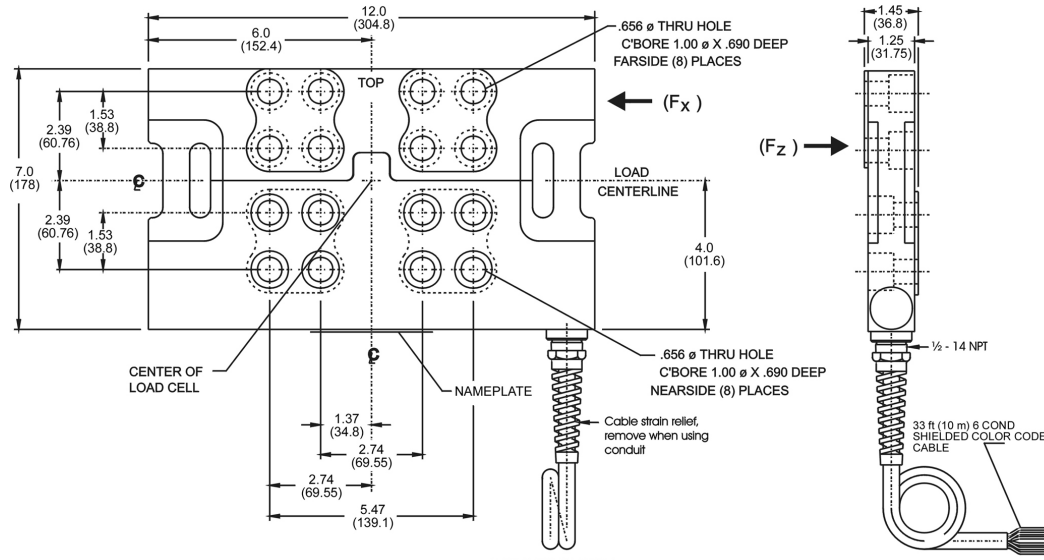


CABLE COLOR CODE

EXCITATION	{ E+ GREEN
	{ E- BLACK
VERTICAL DIRECTION (F _Z)	{ Z+ WHITE
	{ Z- RED
HORIZONTAL DIRECTION (F _X)	{ X+ BLUE
	{ X- ORANGE

Dimensions shown in inches (mm)

OUTLINE DIMENSIONS: ALL OTHER CAPACITIES

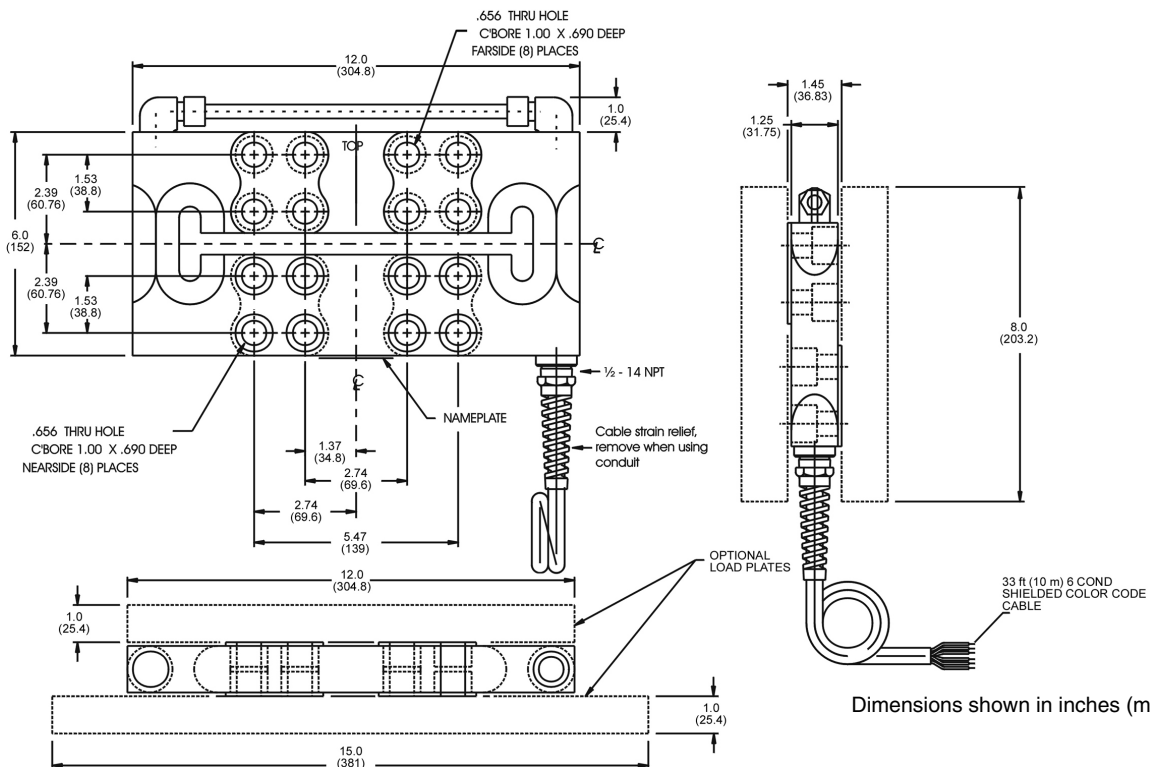

Dimensions shown in inches (mm)

HTU SYSTEM CONFIGURATION

Comprehensive Web Tension System

- Continuous display of left, right, or total tension, wrap angles, or force
- Measures the resultant force for all wrap angles
- Visual display of horizontal and vertical web balance
- Keypad calibration eliminates need for on-site test weights
- 4-20 mA outputs for total tension, total force, and customer configured tension range
- Individually digitized transducer data
- Continuous diagnostic surveillance
- Dynamic Digital Filter
- 750,000 count resolution per channel; 60 updates per second
- Measures the resultant force for all wrap angles
- DeviceNet, Profibus, Allen-Bradley Remote I/O or Modbus Plus Interface to PLC
- Over/under tension setpoint annunciators



AVAILABLE INSTRUMENTATION

LCt-104



Angle & Tension Display
Left, Right, Total

microPOS



Web Tension Controller

DXt-40



Tension Display Left,
Right, or Total

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.