

Load Cell



FEATURES

- Suitable for force measurement applications
- Simple installation
- The cylindric shape makes it easy to replace an axis
- Resistant against harsh environment
- Could be adapted for other dimensions and capacities
- Atex approved for hazardous areas


DESCRIPTION

Double-ended shear beam with circular cross section.

APPLICATIONS

- Offshore
- Cranes
- Tension measurement
- Level monitoring

OUTLINE DIMENSIONS

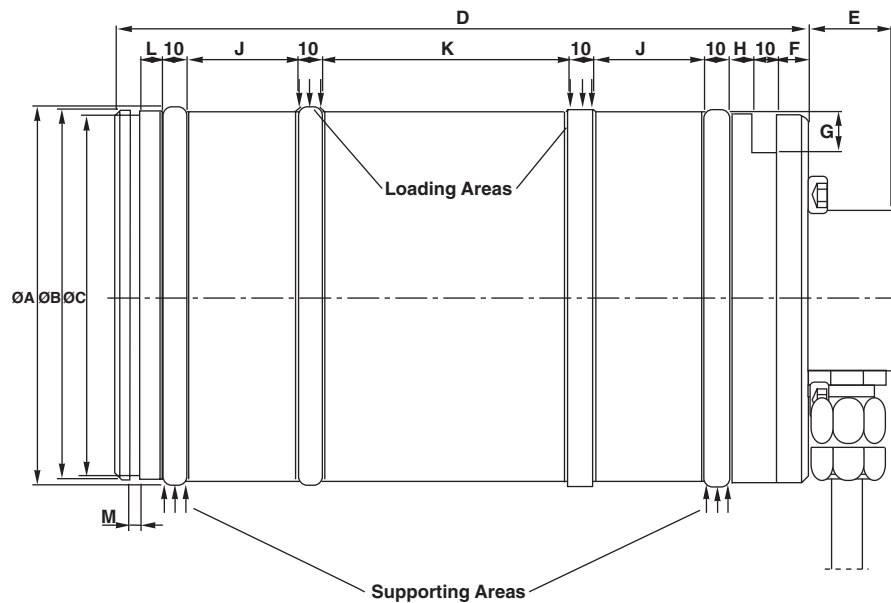


LOAD CELL	RANGE kN	ØA	ØB	ØC	D	E	F	G	H	J	K	L	M
KOSD-101	1000	99	97	94.5	352	38	10	9.5	3	40	183	3	3.15
KOSD-107	1000	99	97	94.5	189	38	10	9.5	3	40	20	3	3.15
KOSD-115	2000	130	127.5	124	279	38	10	15	9.5	45	100	9.5	4.15

SPECIFICATIONS

Rated load (R.L.)		1000, 2000	kN
Combined error (Best fit through zero)		±1	% of R.O.
Repeatability		0.5	% of R.O.
Overload	safe*	100	% of R.L.
	ultimate*	200	% of R.L.
Sideload	safe	100	% of R.L.
	ultimate	200	% of R.L.
Input voltage	recommended	10	V DC or AC
	maximum	18	V DC or AC
Input resistance		700±5	ohm
Output resistance		700±5	ohm
Rated output (R.O.)		≈2	mV/V
Zero balance		±5	% of R.O.
Tolerance of shunt calibration values		±1	% of value**
Temperature range		-30 to +70	°C
Temperature effect	on output	+0.04	% of output/°C
	on zero balance	±0.04	% of R.O./°C
Insulation resistance at 200V DC		>4	Gohm
Material		Stainless steel	
Hardness		350±20	HB
Electrical connection		10m shielded four conductor cable	
Degree of protection		IP 67	
* Referring to recommended loading case			
** See calibration sheet of the load cell		ATEX certified versions for use in explosive atmospheres are available: II 1GD. EEx ia IIC T4 T _{amb} = 60°C	

INSTALLATION EXAMPLES

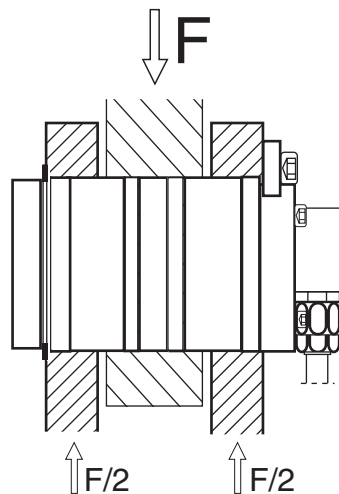

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.