

## Web Tension Indicator



### FEATURES

- High speed 120 update per second A/D conversion speed
- 1 Million count resolution
- Rapid response, high resolution (16 bit) analog output
- RS-422/485 communication port with ASCII or modbus RTU protocol
- Quick-cal set-up
- Dynamic digital process filtering
- Real time system & loop diagnostics

### DESCRIPTION

The LCp-100 HS is a high performance tension indicator and transmitter with features and options focused on the requirements of time critical, high-speed web measurement and control. It is compatible with all strain gage type tension transducers and designed to connect easily with any PLC, DCS, or PC based process control system. Special design emphasis has been placed on simplicity, reliability, and expandability.

Both the front panel display and the 16 bit analog output are updated every 8.3 milliseconds (120 updates per second). This rate provides precise control for web applications running at 2000 feet per minute and faster.


Units are equipped with an expansion slot for installing a wide range of specialized digital interfaces such as Allen-Bradley Remote I/O, Modbus Plus, or Profibus. An integral RS-422/485 serial port provides standard ASCII or Modbus RTU communication for all other devices.

The LCp-100 Operating System encompasses over 50 years of BLH application expertise. Quick calibration and setup procedures save time, money, and even field service calls. On-line diagnostics continuously monitor system performance and alert service personnel to potential problems before they happen.

### APPLICATIONS

- Paper, converting, roofing machines
- Mining conveyor equipment

### CONFIGURATION

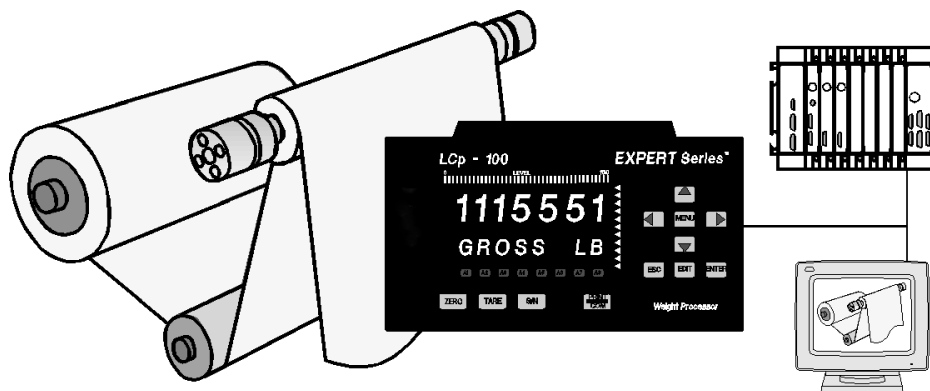

### SPECIFICATIONS

#### Performance

Resolution	1048576 total counts
Displayed Resolution	700,000 counts
Conversion Speed	10 to 133 msec (5-selections)
Displayed Sensitivity	0.05 uV per count
Noise	0.4 uV per count (min. filt. setting)
Full Scale Range	+/-3.5 mV/V
Dead Load Range	100% full scale
Input Impedance	10 m-ohms min
Excitation Voltage	10 Vdc @ 250 mA
Linearity	+/-0.0015% full scale, +/-0.0003%
Software Filter	multi-variable up to 10,000 msec
Step Response	one conversion
Temp Coefficient Zero	+/-2ppm/°C
Temp Coefficient Span	+/-7ppm/°C
Operating Temperature	-10 to 55° C (15 to 131° F)
Storage Temperature	-20 to 85° C (-5 to 185° F)
Humidity	5 to 90% rh non-condensing
Voltage	117/230 Vac +/-15% @ 50/60 Hz
Power	15 watts max

#### Enclosure

Dimensions (std)	4.63 x 8.40 x 6.5 in. HWD
NEMA 4/4X, 12 (opt)	8.5 x 13.5 x 10.45 in. HWD

#### Materials

Aluminum Case & Bezel overlay meets 94V-0 rating

#### Display

Type	high intensity cobalt green vacuum fluorescent
Active Digits	7 digit alpha numeric .59" high for weight: 8 digit alphanumeric .39" high for status

#### Remote Digital Inputs (Optically Isolated)

(Contact closure or do logic compatible)	
Closed (Momentary)	logic low
Open	logic high
Cable Length	100 feet max.

#### Communications (Standard)

Serial RS-422/485	full or half duplex BLH Digi-System Plus Network, ASCII, Provox, or Modbus odd, even or no parity-selectable
Baud Rates	300, 1200, 2400, 4800, 9600, 19200
Addressing	0-99

#### Special Interfaces (Optional)

Allen-Bradley	Remote I/O -1/4 Logical Rack slave
Modbus RTU	peer-to-peer ( with global data) slave
Modbus Plus	
Profibus	

#### Analog Output (Optional)

Conversion	16 bit D-A
Current Selectable	4-20 mA or 0-20 mA - 600 ohm max.

#### Approvals/CE Marking

FM (Factory Mutual)	3611
CSA	C22.2 (all applicable sections)
IEC 801-2	ESD susceptibility, category B radiated electromagnetic field, cat. A
IEC 801-3	conducted line transients, cat. B
IEC 801-4	FCC part 15 subpart B. Class A
EMI Emissions	Canadian Dept. of comm., Class A Group 1, Class A
EN 5501	Electrical Safety
IEC 1010-1/EN61010-1	Susceptibility: subparts 801,2,3, & 4
EN50082-1 1992	Equipment Class I, Group A
EN55011 Emissions:	

BLH is continually seeking to improve product quality and performance. Specifications may change accordingly.

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.