


Remote Displays

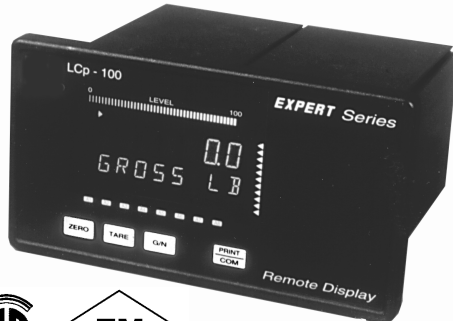

FEATURES

- Digit-for-digit weight/tension indication from a master LCp-100 or LCp-200 indicator/transmitter
- Simple installation - no calibration required
- Can be located 2000 feet from the transmitting device
- Panel mount or optional NEMA 4/4X enclosure
- FM approved, CE marked, and CSA certified

DESCRIPTION

BLH Remote Digital Displays receive and display serial ASCII data transmitted by a host LCp-100, LCp-200 series weight indicator/ transmitter. Operating on supplied data, the Remote Display precisely duplicates the weight/tension value display of the host device. Indication also includes gross, net, and rate information.

Units require only a twisted pair of wires for interconnection and mount up to 2000 feet from the host device. Remote Display units are ideally suited for applications where analog panel meter resolution is not adequate. Analog displays present only an approximation of actual weight data whereas serial communication guarantees digit-for-digit replication. Precision


accuracy, easy installation, and optional NEMA or explosion-proof enclosures make these units the perfect choice for plant or control room remote display.

Front panel ZERO and TARE keys transmit push to zero and tare commands to the host device. The G/N (gross-net-rate) key, however, functions independently from the host device. For example, a remote LCp-200R unit can display net weight or rate while the host LCp-200 displays gross weight.

APPLICATIONS

- High resolution remote display

CONFIGURATION

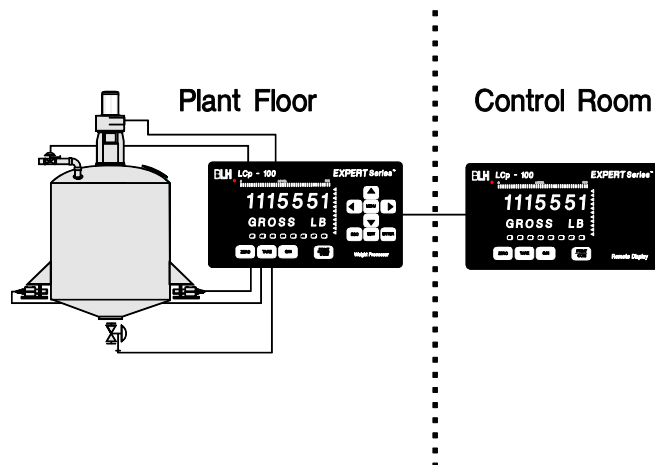

SPECIFICATIONS

Display

Type high intensity cobalt green vacuum fluorescent
 Active Digits 7 digit alpha numeric 0.59" high for weight: 8 digit alpha numeric 0.39" high for status

Communications

Serial RS-485 two wire, half duplex
 Baud Rate 9600

Approvals/Certifications

FM (Factory Mutual) 3611
 CSA C22.2 (all applicable sections)

Environment

Operating Temp. -10 to 55°C (15 to 131°F)
 Storage Temp. -20 to 85°C (-5 to 185°F)
 Humidity 5 to 90% rh non-condensing
 Voltage 117/230Vac ± 15% @ 50/60Hz
 Power 15 watts max
 Parameter Storage flash EPROM


Enclosure

Dimensions (std) 4.63 x 8.40 x 6.5in. HxWxD
 NEMA 4/4X, 12 (opt) 8.5 x 13.5 x 10.45in. HxWxD

Materials

Aluminum Case/Bezel overlay meets 94V-0 rating

DIMENSIONS

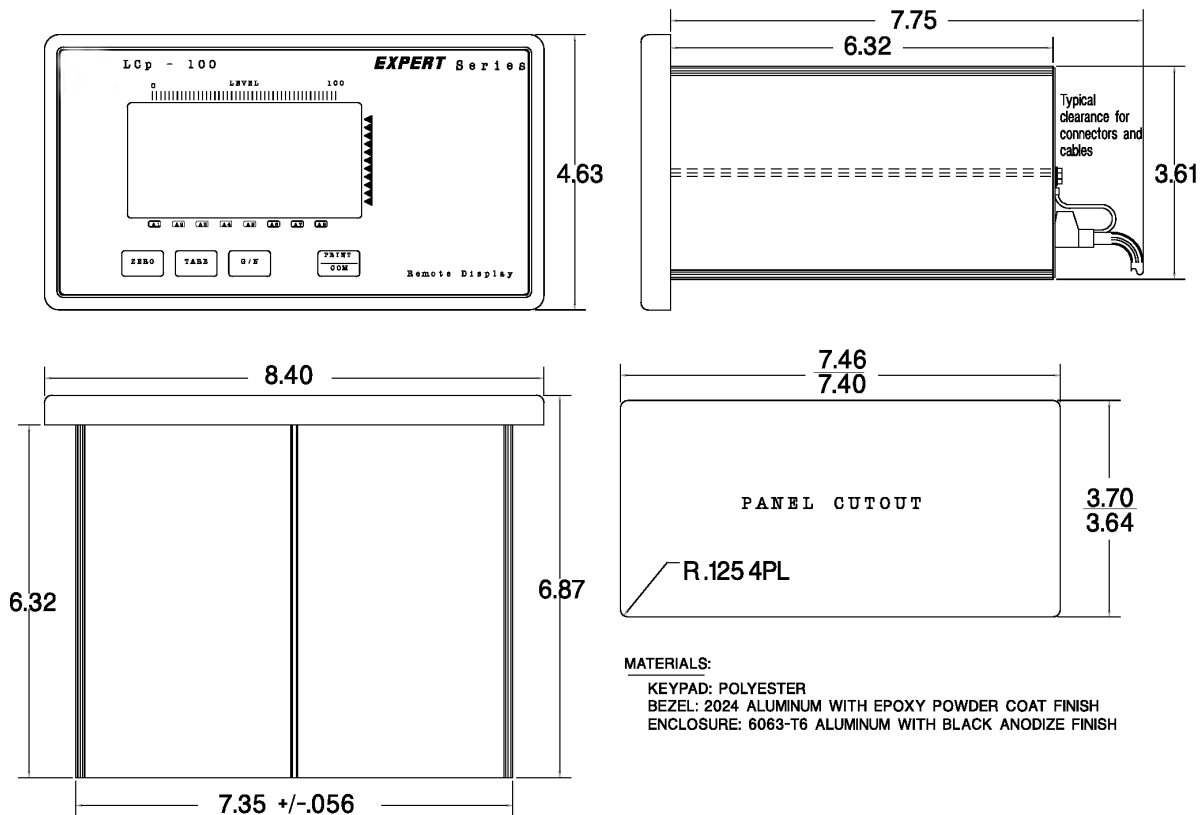

BLH is continually seeking to improve product quality and performance. Specifications may change accordingly.

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.