

Gate-Weigh® LAN Controller



FEATURES

- Single port communication interface for multiple transmitters/indicators
- Constant update and storage of node data eliminates polling/response delay time
- Modbus Plus or RTU protocol and Allen-Bradley Remote I/O
- Self-configuring BLH Digi-System Plus Network

DESCRIPTION

The LCP-400 Gate-Weigh is a multi-scale local area network controller and communication gateway. This network bridge device uses BLH Digi-System Plus network communication technology to continuously scan up to 16 weigh system nodes and is equipped with an Allen-Bradley Remote I/O or Modbus Plus network port output. The LCP-400 is also available with a conventional MODBUS RTU serial output.

BLH Digi-System Plus network is a self configuring, enhanced RS-485 based communication link that operates at a rate of 57.6 Kbps over distances of up to 4000 ft. Operationally, the LCP-400 scans each node on the network continuously and


updates internal register locations with current weigh, diagnostics and status data. Through the gateway port, a host PLC, PC or DCS can perform read/write commands to retrieve data without polling and response delays typical in other multi-drop network arrangements.

In addition to the network communication and gateway functions, the LCP-400 is also a centralized scanning terminal that displays weight & status information from any node on the network. Currently, the LCP-400 Digi-System Plus network is compatible with the LCP-100 Indicator/Transmitter, LCP-200 Indicator Controller, DXp-40 Transmitter, and PS-2010 Controllers.

APPLICATIONS

- Plant-wide weigh system LAN
- Controller
- 16 system interface with PLC or DCS systems

CONFIGURATION

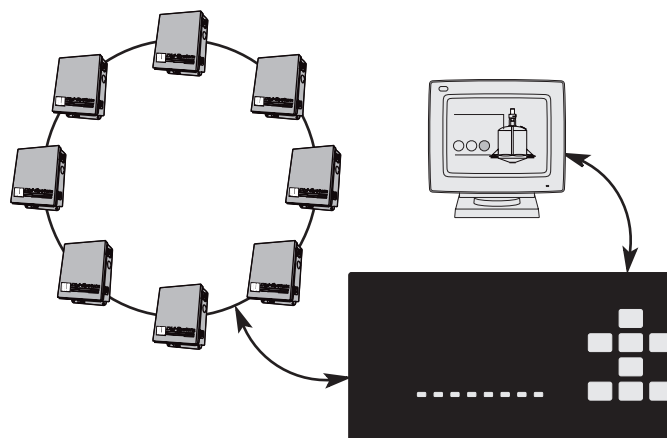

SPECIFICATIONS

Display

Type	high intensity cobalt green vacuum fluorescent
Active Digits	7 digit alpha numeric 0.59" high for weight; 8 digit alpha numeric 0.39" high for status

Environment

Operating Temperature	-10 to 55° C (15 to 131° F)
Storage Temperature	-20 to 85° C (-5 to 185° F)
Humidity	5 to 90% rh non-condensing
Voltage	117/230Vac ±15% @ 50/60Hz
Power	15 watts max

Enclosure

Dimensions (std)	4.63 x 8.40 x 6.5 in. HxWxD
NEMA 4/4X, 12 (opt)	8.5 x 13.5 x 10.45 in. HxWxD

Materials

Aluminum Case & Bezel overlay meets 94V-0 rating

BLH Digi-System Plus Network

Serial RS-485	two wire
Baud Rates	9600, 28800, or 57600
Protocol	proprietary
Addressing	up to 16 nodes


Gateway Interfaces

Allen-Bradley	remote I/O - 1/4 logical rack
Modbus RTU	slave
Modbus Plus	peer-to-peer

Approvals/Certifications

FM (Factory Mutual)	3611 (Class I, II, III; Div.1,2; Groups A-G)
CSA	C22.2 (Class I, II, III; Div.1,2; Groups A-G)

DIMENSIONS

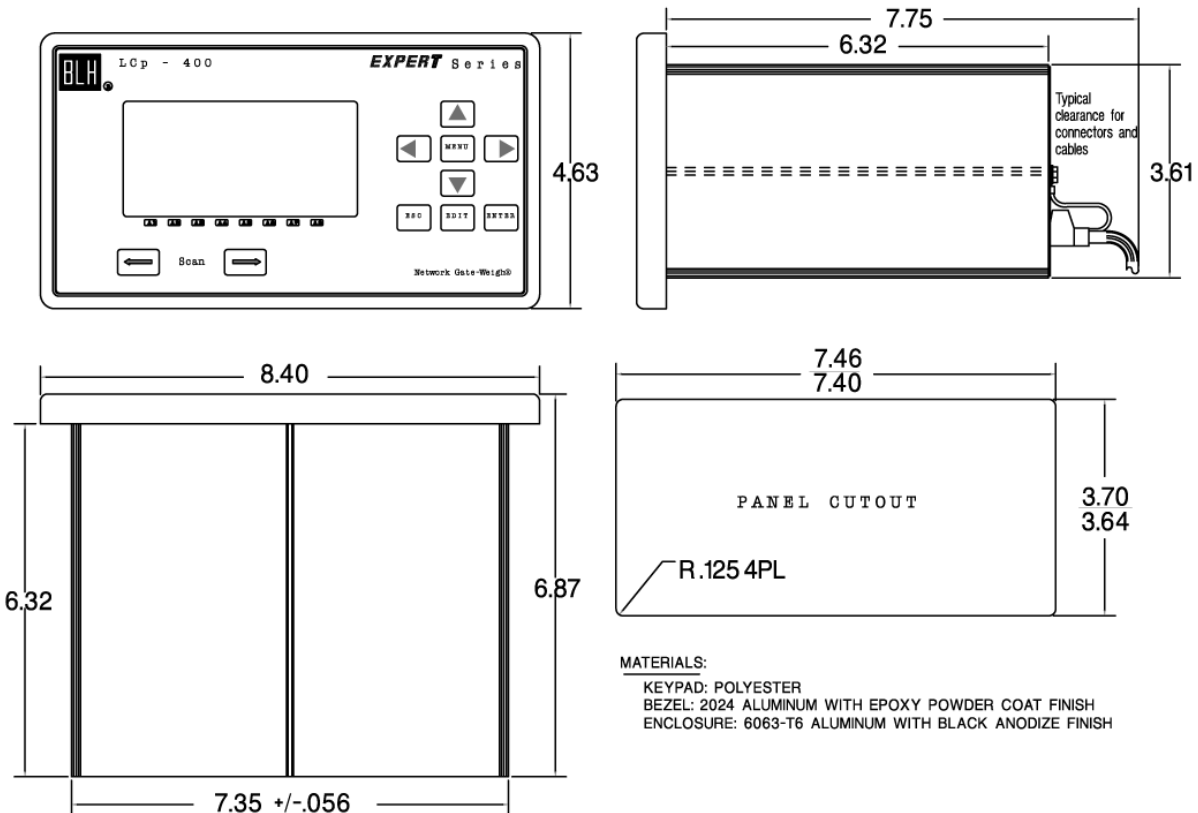

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.