

Load Cell Tester



FEATURES

- System diagnostic and service
- Calibration function
- Testing of individual load cell
- Saving of up to 100 different systems
- Easy connection to Junction Box SL-5

DESCRIPTION

A load cell tester with calibration and diagnostic functions. Easy to connect to any system and specially to junction box SL-5. Can store up to 100 different systems which can be recalled when needed.


Communication via RS 232 to allow bi-directional files transfer.

APPLICATIONS


- All weighing and force

CONNECTIONS

Standard "A" type cable with 25 pin Sub-D connectors

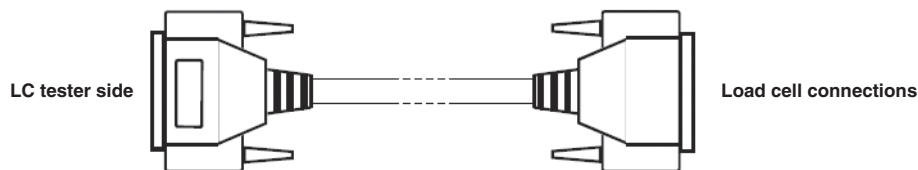

Optional "B" type cable with spring terminal connectors

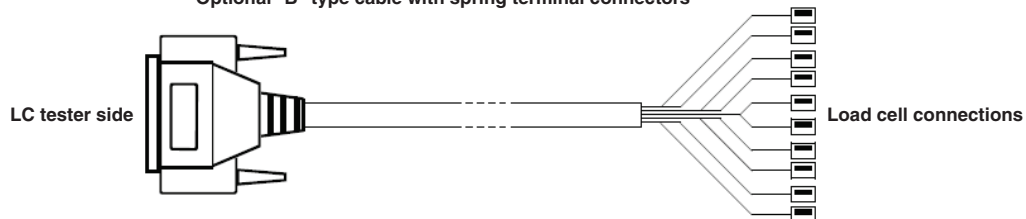

SPECIFICATIONS

PARAMETER	VALUE	UNIT
Power supply	4 x 1.5V alkaline batteries AA size 4 x 1.2V NiMH rechargeable batteries AA size	
Power consumption	125 to 190	mA
Operating temperature range	-10 to +50	°C
Storage temperature range	-20 to +70	°C
Display	Graphic	
Keyboard	16 keys on/off switch on keyboard	
Overall dimensions	220 x 116/85 x 51 (L x W x H)	
Weight	Approximately 500	g
Enclosure	Polyamide (UL94 - V2)	
Protection degree (front)	IP54	
Load cells connections	2m cable with 25 pin sub-D 3m cable with spring terminals	
Load cells excitation voltage	5 / 60mA (max 4 x 350Ω LC's)	V DC
4 individual load cells channels with the following performance		
Linearity	<0.01	% of full scale
Internal resolution	24	bit
Weight display resolution	Up to 50000	counts
Input signal range	-4 to +4	mV/V
Decimal digits	Up to 3	

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.