

Legal-for-Trade Weighing System



DISPLAY

- LCD display with backlight
- 4 off alpha numeric character sets
- 12 - 24 Vdc
- Sealed to IP40
- Temperature range -10 to +50°C
- Optical communications attachment facility for transferring data to a PC

FEATURES

- Approved for trade invoicing from the cab
- OIML R76 approved to Class III and IIII
- Accurate to 20kg in 15,000kg
- Ideal for waste and recycling vehicles
- Tilt compensation of up to 10 degrees
- Comprises 4 or 6 load cells
- RS232 serial port for remote indicator, network and printer

OPTIONAL FEATURES

- RS232 and RS485 interface
- Bluetooth
- Barcode reader
- Flashcard memory via USB
- Electronic data storage device (DSD)

DESCRIPTION


The LFT1500 system is a legal-for-trade (R76 Class III and IIII) on-board weighing system that can be used for charging by weight at the point of loading/unloading. It comprises of 4 to 6 durable load cells, an inclinometer, indicator and printer. The system allows for corner and compensation of the truck tilting up to 10°.

Our approved 22,000kg capacity load cell together with the chassis inclinometer produce weighing accuracies better than 20kg in 15,000kg. A wide range of mounting brackets is available to suit different vehicle design parameters.

APPLICATIONS

- RELs and FELS
- Recycling Trucks
- Cement Trucks
- Tankers
- Hook Loaders
- Tipping Trucks
- Demountable
- Ship Vehicles

SYSTEM BLOCK DIAGRAM*

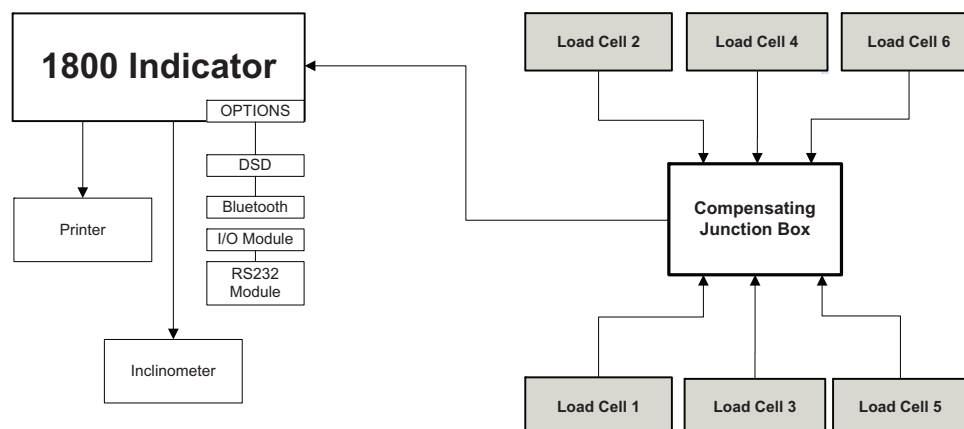

* 6 cell system shown, can be 4 cells.

Legal-for-Trade Weighing System

SPECIFICATIONS				
PARAMETERS	MINIMUM	TYPICAL	MAXIMUM	UNIT
SYSTEM				
Class III				
Capacity	20e	15000	30000	kg
Scale interval (e)	10			e
Number of divisions (n)	500		1500	
Class IIII				
Capacity	10e	15000	30000	kg
Scale interval (e)	10			e
Number of divisions (n)	100		1000	
Tilt compensation	-10		+10	°
POWER INPUT				
Power consumption			15	VA
Operating voltage		24		Vdc
INDICATOR				
Linearity correction (optional)	10 points			
Indicator	LCD with 4 alpha-numeric lines and LED backlighting			
Setup and calibration	Full digital with visual prompting in plain messages			
Digital filter	Sliding window average from 0.1 to 30.0 seconds			
Zero range	-20		+20	% of full capacity
Operating temperature	-10		+50	°C ambient
Storage temperature	-10		+50	°C ambient
Humidity (non-condensing)			90	%
Protection level	IP55 when panel mounted or with rear boot (otherwise IP40)			
LOAD CELLS				
Capacity (per load cell) (Emax)			22,000	kg
Accuracy class	OIML R60 C3			
Output sensitivity	2.5 ± 0.008			mV/V
Save overload			150	% of Emax
Temperature range, compensated	-10		+40	°C
Material	Alloy steel			
Protection class	IP68			
ACCESSORIES AND OPTIONS				
Optical data communications	Magnetically coupled optical communications support. Optional conversion cable connects directly to a standard RS232 port or USB port			
Serial outputs	RS-232 serial port for remote indicator, network or printer supports RS-485 transmit only for remote indicator Transmission rate: 2400, 4800, 9600 or 19200 baud			
2 assignable function keys	Printing, unit switching, counting, manual hold, peak hold and totalising			
Battery backed-up real-time clock	Battery life: 10 years minimum			

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.