


Crane Scale Load Cell

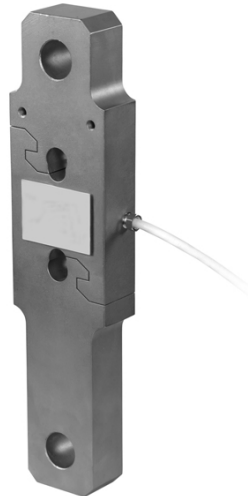

FEATURES

- Capacity: 1.5t to 30t
- Alloy steel construction
- Integrated overload protection for both tension and compression loading
- Direct mounting of weight indicator
- IP67 protection

DESCRIPTION

Model 91002 is an alloy steel shear beam load cell designed for crane scale and hanging scale applications. The load cell design features integrated overload protection for both tension and compression loading with a rated output of 1.5mV/V.

Model 91002 is supplied with a Teflon cable which makes the load cell ideal for harsh environments. The design also allows for direct mounting of the weight indicator which is typical for crane scale applications.

APPLICATIONS


- Crane scales
- Hanging scales

OUTLINE DIMENSIONS in millimeters

CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L THREAD
1.5, 3.0, 5.0 tons	29.7	69.5	289.0	238.6	50.0	50.0	49.0	130.0	110.0	19.0	10.0	M6 x 1.0, DEEP 12.0, 4 PLCS
7.5, 15.0 tons	37.0	120.0	399.5	295.5	73.8	90.0	100.0	199.5	100.0	36.0	18.0	M12 x 1.75 DEEP 12.0, 4 PLCS

1.5-15.0 tons

30.0 tons

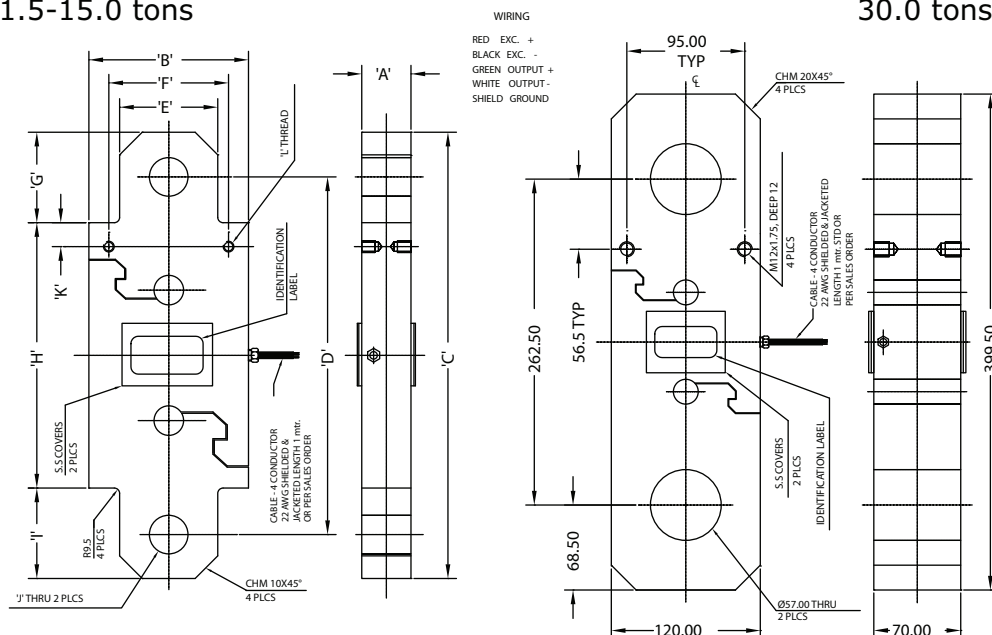

SPECIFICATIONS

PARAMETER	VALUE	UNIT
Rated output-R.O.	1.5	mV/V
Rated output tolerance	5	± %FSO
Zero balance	1	± %FSO
Combined error	< 0.050	± %FSO
Non-linearity	< 0.030	± %FSO
Hysteresis	< 0.020	± %FSO
Non-repeatability	< 0.020	± %FSO
Creep error (30 minutes)	< 0.020	± %FSO
Temperature effect on zero	< 0.002	± %/°C
Temperature effect on output	0.001	± %/°C
Operating temperature range	-20 TO +70	°C
Maximum safe central overload	150	%FSO
Ultimate central overload	300	%FSO
Excitation, recommended	10	Vdc
Excitation, maximum	15	Vdc
Input impedance	360-450	Ω
Output impedance	349-355	Ω
Insulation resistance at 50 VDC	>1000	MΩ
Material	Alloy steel with electroless nickel plated	
Environmental protection	IP67	

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.