


Panel Mount Load Cell Indicator/Transmitter

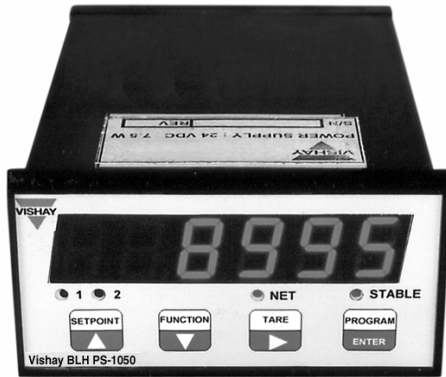

FEATURES

- Push-button configuration and calibration
- 10-Point load cell linearization
- Selectable 0-10Vdc or 4-20mA isolated analog output
- Peak hold functions for dynamic/historic measurement
- Keypad entry or conventional dead load calibration
- Selectable/adjustable digital filtering
- Serial communication and Modbus RTU protocol

DESCRIPTION

PS-1050 digital/analog transmitters provide signal conditioning, amplification, and a corresponding digital or isolated analog output signal for tank/bin/hopper weighing systems. Front panel configuration and calibration streamlines system installation and operation.

Calibration and configuration parameters also can be downloaded via PC based Pro-View Software. In either case, no dip switch or potentiometer adjustments are required.

An isolated 0-10V or 4-20mA analog output provides factory floor communication for a data logger, remote panel meter, or PLC

input. High level serial communication is available in RS-232, RS-422, or RS-485 format with Modbus RTU protocol. Up to 32 PS-1050's can be connected point-to-point using the RS-485 serial output.

Convenient 1/8 DIN size panel mounting and removable terminal block connectors simplify installation procedures.

BLH offers the PS-121, 24Vdc Power Supply (data sheet #12155), for PS-1050 operation.

APPLICATIONS

- Storage tank, bin, and hopper weighing
- Silo and inventory measurement systems
- Loss-in-weight feeders
- Floor and bench scale indication

CONFIGURATION



PS-1050 Indicator/Transmitter

SPECIFICATIONS

PERFORMANCE

Resolution	60,000 counts
Conversion Speed	50 updates/second (no filtering)
Sensitivity	0.2 μ V/count
Full Scale Range	-0.5mV/V to +3.5 mV/V
Linearity	<0.01% of full scale
Excitation Voltage	5 volts fixed, short circuit proof
Load Current	85mA (six 350 ohm load cells)
Filter	0.5Hz to 25Hz selectable
Temperature Creep	<0.0011% of full scale/ $^{\circ}$ C (<0.0006% of full scale/ $^{\circ}$ F)
A/D Converter	24 bits
Increment Size	x1, x2, x5, x10, x20, x50
Decimal Point	0.0, 0.00, 0.000
Calibration Methods	computer interface or via front panel

ENVIRONMENTAL

Operating Temperature	-4 to +40 $^{\circ}$ C (+14 to +104 $^{\circ}$ F)
Storage Temperature	- 20 to +50 $^{\circ}$ C (-4 to +122 $^{\circ}$ F)
Relative Humidity	85% non-condensing

DISPLAY

Type	6-digit red LED, 7 segment 0.55" high
Status LED's	(4) red LED's
Keyboard	(4) keys (tactile feedback)

ELECTRICAL

Input Voltage	24Vdc \pm 15%
Power	7.5 Watts
Isolation	class II
Category	category II

ANALOG OUTPUT (ISOLATED)

Type	16 bit D/A conversion
Voltage	0-10Vdc (10K ohms min load)
Current	4-20mA (300 ohm max)
Linearity	<0.012% of full scale
Temperature Creep	<0.0011% of full scale/ $^{\circ}$ C (<0.0006% of full scale/ $^{\circ}$ F)

INPUTS & OUTPUTS

(2) Logic Inputs	opto-isolated, 24Vdc PNP (requires ext. power supply)
(2) Logic Outputs	solid-state relays, (maximum load 24Vdc/100mA each)

SERIAL COMMUNICATION

Serial Output	RS-232, RS-422 or RS-485
Baud Rate	2400, 9600, 19200, 38400, or 115200 - selectable
Standard Protocols	ASCII, Modbus RTU
Maximum Cable Length	50 feet RS-232, 3200 feet for RS-422 and RS-485

ENCLOSURE

Overall Dimensions	96 x 48 x 160mm (L x H x D) (3.75" x 1.87" x 5.90") (L x H x D)
Mounting	panel mount cutout = 91 x 44mm (cutout = 3.58" x 1.72")
Enclosure	ABS Plastic
Protection (front)	IP20
Weight	300 grams (9.6 ounces)
Wiring Connections	removable terminal blocks pitch = 5.08mm (pitch = 0.196")

APPROVALS

CE	EN 50082-2, 55011
----	-------------------

is continually seeking to improve product quality and performance. Specifications may change accordingly.

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.