


Bulk Metal[®] Foil Technology 1445Q-14 Pin and 1446Q-16 Pin DIP Packages



Product may not be to scale

Vishay Models 1445Q and 1446Q networks are qualified to MIL-PRF-83401, Characteristic C, Schematic A. Actual performance exceeds all the requirements of MIL-PRF-83401 characteristics "C".

Model 1445Q contains 7 resistors and 1446Q contains 8 resistors. Qualified resistance range is 100 Ω through 10 kΩ. Other values are available non-QPL. Power rating is 0.1 Watt.

FIGURE 1 - MODEL 1445Q DIMENSIONS


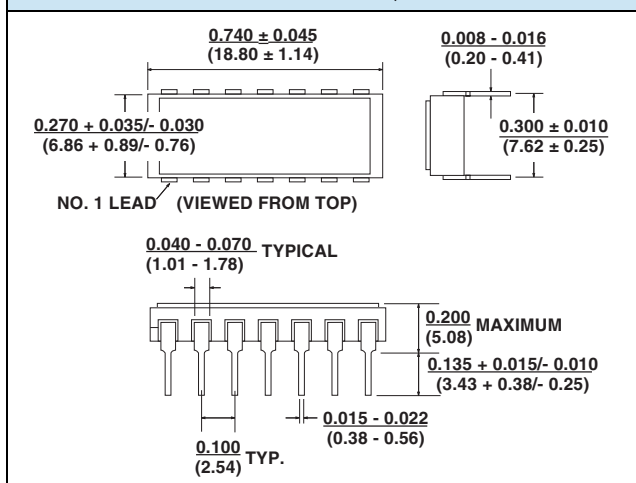


FIGURE 2 - MODEL 1446Q DIMENSIONS

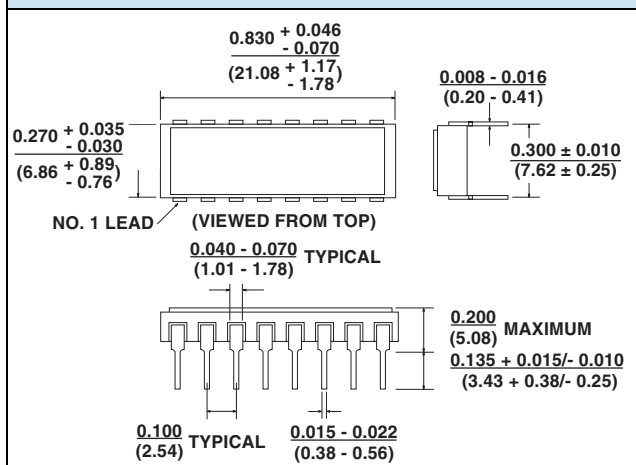

FEATURES

- Hermetically Sealed for maximum environmental protection - 100 % leak protection
 Gross Leak: No bubbles
 Fine Leak: $< 5 \times 10^{-7}$ cc/sec
 (MIL-STD-220, Method 112, Test C, Procedure 111A)
- Tested per MIL-PRF-83401
- Ceramic Package: 94 % Alumina (Al₂O₃)
- Lid: Gold plated Kovar
- Solder: Tin/Gold
- Leads: Alloy 42 (Iron Nickel) with 100 μ Inches gold plating (MIL-STD-1276, Type G-21-A)
- Gold ball wire bonding
- Foil Chips V15X5

ADDITIONAL TESTING TO MIL SPEC

Group A testing to MIL-PRF-83401 imposes the following:

1. Thermal shock 100 %
 5X from - 65 to + 125 °C
2. Power conditioning 100 %
 2. 1 100 hours at 25 °C, full power
 2. 2 ΔR and ΔRatio calculation
3. Visual and Mechanical after the above tests (sample plan)
 3. 1 Conformity to physical size
 3. 2 Workmanship
 3. 3 Damage due to the above tests
4. 10 % PDA or one piece whichever is greater
5. Solderability (sample plan)

Group B sample testing to MIL-PRF-83401 imposes the following:

1. Temperature Coefficient of Resistance (sample plan)
2. Resistance to solvents (sample plan)

TABLE 1 - TCR CHARACTERISTIC			
Qualification to Characteristic "C" allows Vishay to supply to the following characteristics ¹ .			
CHARACTERISTIC	TCR ABSOLUTE	TCR TRACK	SEAL
C	± 50	± 5	Hermetic
V	± 50	± 5	Non-Hermetic
H	± 50	N.A.	Non-Hermetic
K	± 100	N.A.	Non-Hermetic
M	± 300	N.A.	Non-Hermetic

NOTE:

1. For characteristics H, K and M the "C" power rating must be acceptable.

TABLE 2 - RESISTANCE VALUE
A four digit designator in which the first three digits are significant figures and the fourth digit indicates the number of zeros to follow.
Example: 1002 = 10K

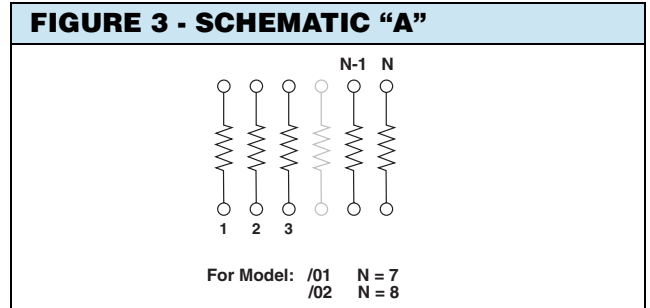


TABLE 3 - MIL-PRF-83401 PERFORMANCE SPECIFICATIONS								
TEST OR CONDITION	MIL-PRF-83401							
	Y	R	C	V	H	K	M	
Resistance Temp Characteristic ppm/°C	± 5	± 25	± 50	± 50	± 50	± 100	± 300	
Tracking To Reference Element (- 55 to + 125 °C) ppm/°C	± 5	± 5	± 5	± 5	NA	NA	NA	
Max Ambient Temp at Rated Wattage	+ 70 °C							
Max Ambient Temp at Zero Power	+ 125 °C							
Thermal Shock and Power Conditioning	± 0.02 % ± 0.01 %	± 0.08 % ± 0.04 %	± 0.25 % ± 0.03 %	± 0.25 % ± 0.03 %	± 0.50 % NA	± 0.70 % NA	± 0.70 % NA	
Low Temperature Operation ΔR	± 0.02 %	± 0.03 %	± 0.10 %	± 0.10 %	± 0.10 %	± 0.25 %	± 0.50 %	
Short Time Overload ΔR	± 0.02 %	± 0.03 %	± 0.10 %	± 0.10 %	± 0.10 %	± 0.25 %	± 0.50 %	
Terminal Strength ΔR	± 0.01 %	± 0.03 %	± 0.10 %	± 0.10 %	± 0.25 %	± 0.25 %	± 0.25 %	
Resistance to Soldering Heat ΔR	± 0.01 %	± 0.05 %	± 0.10 %	± 0.10 %	± 0.10 %	± 0.25 %	± 0.25 %	
Moisture Resistance ΔR	± 0.02 %	± 0.05 %	± 0.20 %	± 0.20 %	± 0.40 %	± 0.50 %	± 0.50 %	
Shock (Specified Pulse) ΔR	± 0.02 %	± 0.03 %	± 0.25 %	± 0.25 %	± 0.25 %	± 0.25 %	± 0.25 %	
Vibration, High Frequency ΔR	± 0.02 %	± 0.03 %	± 0.25 %	± 0.25 %	± 0.25 %	± 0.25 %	± 0.25 %	
Load Life (+ 70 °C, Full Power, 1000 hours) ΔR	± 0.05 %	± 0.1 %	± 0.10 %	± 0.10 %	± 0.50 %	± 0.50 %	± 2.00 %	
+ 25 °C Power Rating (1000 hrs.) ΔR	± 0.05 %	± 0.1 %	± 0.10 %	± 0.10 %	± 0.50 %	± 0.50 %	± 2.00 %	
High Temperature Exposure (+ 125 °C, 100 hours) ΔR	± 0.02 %	± 0.05 %	± 0.10 %	± 0.10 %	± 0.20 %	± 0.50 %	± 1.00 %	
Low Temperature Storage ΔR	± 0.01 %	± 0.03 %	± 0.10 %	± 0.10 %	± 0.10 %	± 0.25 %	± 0.50 %	
Insulation Resistance	10 000 MΩ							
Resistance Tolerance and, when applicable, Resistance Ratio Accuracy	± 0.005(V) ± 0.01(T) ± 0.05(A) ± 0.1(B) ± 0.5(D) ± 1.0(F)	± 0.05(A) ± 0.1(B) ± 0.5(D)	± 0.1 %(B) ± 0.5 %(D) ± 1.0 %(F)	± 0.1 %(B) ± 0.5 %(D) ± 1.0 %(F)	± 0.1 %(B) ± 0.5 %(D) ± 1.0 %(F)	± 0.5 %(D) ± 1.0 %(F) ± 2.0 %(G)	± 1.0 %(F) ± 2.0 %(G) ± 5.0 %(J)	

NOTE:

1. ΔR's are not cumulative. For purposes of determining reliability calculations, consider the characteristics shown as figures of merit and allow no more than ± 0.05 % ΔR lifetime. Allow proportionately less if the severity of anticipated environmental stress is small compared to the tests as defined in MIL-PRF-83401.

TABLE 4 - ORDERING INFORMATION - VISHAY QUALIFIED M83401 SERIES (MIL-PRF-83401) NETWORKS

M83401	01	C	1002	B	A
MILITARY SPECIFICATION	SLASH SHEET	TCR CHARACTERISTIC	RESISTANCE VALUE	RESISTANCE TOLERANCE	SCHEMATIC ²⁾
MIL-PRF-83401	Vishay is qualified to the following slash sheets: /01 14 pin DIP, Vishay P/N 1445Q /02 16 pin DIP, Vishay P/N 1446Q	Vishay is qualified to Characteristic C (see Table 1)	Vishay is qualified from 100 Ω through 10 kΩ (see Table 2)	Vishay is qualified to the following tolerances: B = 0.1 % D = 0.5 % ¹⁾ F = 1.0 % ¹⁾ G = 2.0 % J = 5.0 %	Vishay is qualified to schematic "A". (see Figure 3)

NOTE:

- For standard values by tolerance see Table III of MIL-PRF-83401.
All values are considered standard when the specified tolerance is tighter than 0.10 %.
- What to do if QPL is required and no schematic is available:
 - Schematic "X" - Additional special schematics may be identified as "X" schematic and described fully in the detailed specifications.
 - DSCC Drawings - Anyone can request DSCC Drawings if the part is to be used on a military contract. Submit either a catalog sheet or SCD to DSCC or call Vishay for more information.
- Hot solder dip leads are available upon request.

Example:

14 Pin, 7 Resistor, 10K000, 0.1 % Tolerance

Military Specification: M83401

Slash Sheet: 01

TCR Characteristic: C

Resistance Value: 1002

Resistance Tolerance: B

Schematic: A

16 Pin, 8 Resistor, 100R00, 0.1 % Tolerance

Military Specification: M83401

Slash Sheet: 02

TCR Characteristic: C

Resistance Value: 1000

Resistance Tolerance: F

Schematic: A

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.