


ROADRUNNER™ Platform Wheel Weigher

SI Onboard

ROADRUNNER™ Platform Wheel Weigher

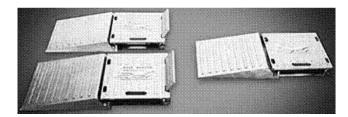


FEATURES

- \pm 0.1% of applied load or \pm 0.02% of channel capacity, whichever is greater
- 7,500 to 60,000 lbs. capacity
- 1 to 4 channels of input for weighing
- Operates on 10 to 32 Volts DC or 115/230 VAC
- RS-232 for PC Data storage
- Cast aluminum Platform with Non-Slip Surface
- Stainless Steel load cells
- **OPTIONS**
- Printer
- External battery charger

DESCRIPTION

The Roadrunner Wheel Weigher System provides fast and accurate weight readings for a variety of light to medium applications. Each system is designed for easy transportation and quick setup in a matter of minutes. Using the digital indicator, the operator can display the weight of each pad individually or the sum of any combination of pads.

SYSTEM BLOCK DIAGRAM

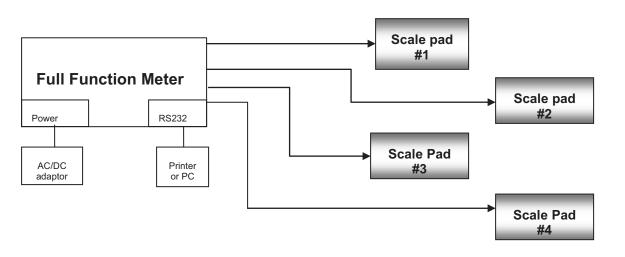

- APPLICATIONS
- Aircraft
- Helicopters
- Race cars

ROADRUNNER™ Platform Wheel Weigher

SI Onboard



ROADRUNNER[™] Platform Wheel Weigher

SPECIFICATIONS	
PARAMETERS	DESCRIPTION
Accuracy	\pm 0.1% of applied load or \pm 0.02% of channel capacity, whichever is greater
Capacity (GVW)	7,500 to 60,000 lbs
METER	
Digit Size	0.4", 2 Line
Display Type	LCD, 1" x 4"
Display modes	Gross weight, Channel weight, Lb. or kg
Communications	RS232
Number of channels	1 to 4
Operating voltage	10 to 32 Vdc or 115/230 Vac (with charger)
Operating temperature	14 °F to 120 °F
Size of Meter	9" W x 6" T x 6" Deep
Size of Scale Pad 2.5K	12" W x 13" Deep x 3" tall
Size of Scale Pad 6K, 10K, 15K	17" W x 17" Deep x 3.5" tall



Vishay Precision Group

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.