

## Precision Linear Transducers, Designed for Mounting in Hydraulic or Pneumatic Cylinder, Conductive Plastic Element (Unsealed Series/Ø 16 mm)


**FEATURES**

- Large range of strokes from 25 to 2000 mm
- High accuracy
- Very good repeatability
- Continuous resolution
- Easy mounting



These unsealed sensors are suitable for installation in the high pressure chamber of cylinders.

<b>ELECTRICAL SPECIFICATIONS</b>	
Theoretical Electrical Travel (TET) = E	From 25 mm to 2000 mm in increments of 25 mm
Independent Linearity (over TET) On Request	$\leq \pm 1\%$ ; $\leq \pm 0.1\%$ $\leq \pm 0.05\%$ if $E \geq 100$ mm, $\leq \pm 0.025\%$ if $E \geq 200$ mm
Actual Electrical Travel (AET)	TET + 6 mm $\pm$ 0.5
Total Resistance $R_T$	150 $\Omega$ /cm
Resistance Tolerance at 20 °C	$\pm 20\%$
Repeatability	$\leq 0.01\%$
Maximum Power Rating	0.05 W/cm at 70 °C, 0 W at 125 °C
Wiper Current	Recommended: a few $\mu$ A - 1 mA max. (continuous)
Load Impedance	1000 times $R_T$ minimum
Insulation Resistance	> 1000 M $\Omega$ , 500 V <sub>DC</sub>
Dielectric Strength	> 300 V <sub>RMS</sub> at 50 Hz

<b>MECHANICAL SPECIFICATIONS</b>	
Mechanical Travel (MT)	MT = TET
Body	Anodized aluminum
Rod Internal Diameter	16 LH: Ø 18 mm
Support	2 screws
Operating Force	1 N typical
Electrical Outputs	Wires 300 mm long
Oil	Insulating mineral hydraulic
Pressure	300 bars continuous, 1000 bars accidentally
Wiper	Precious metal multifinger


<b>PERFORMANCE</b>	
Life	25 million cycles typical/1 Hz/T° = 20 °C $\pm$ 5 °C/80 % TET
Temperature Limits	- 20 °C to + 80 °C
Speed at 20 °C	1.5 m/s max.

# Series REC 16 LH



Vishay Sfernice Precision Linear Transducers, Designed for Mounting in Hydraulic or Pneumatic Cylinder, Conductive Plastic Element (Unsealed Series/Ø 16 mm)


## DIMENSIONS in millimeters, general tolerance $\pm 1$ mm

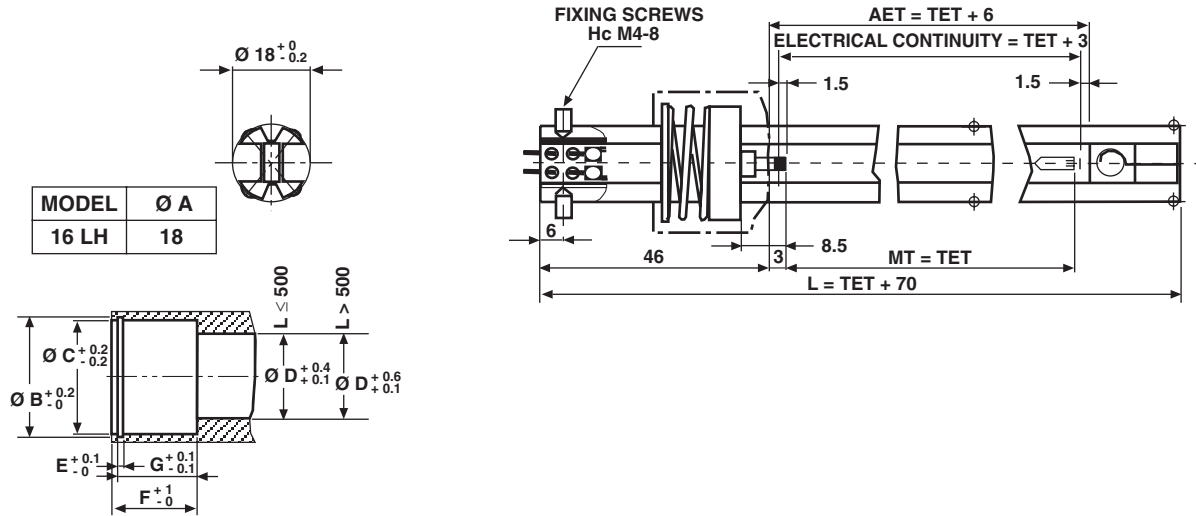

MODEL	Ø A
16 LH	18


MODEL	B	C	D	E	F	G
16 LH	25.2	24	18	1.3	17.8	16.3

## MOUNTING IN ACTUATOR

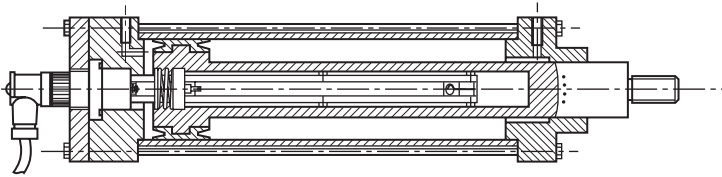

On these models:  
Cylinder sealing and electrical connections required

## ELECTRICAL CONNECTIONS

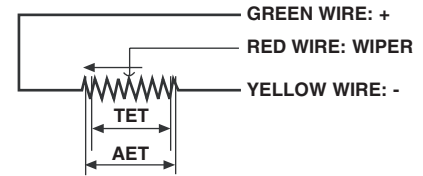

TET = THEORETICAL ELECTRICAL TRAVEL  
AET = ACTUAL ELECTRICAL TRAVEL

## ORDERING INFORMATION/DESCRIPTION

REC SERIES	16 MODEL	LH TYPE	4 THEORETICAL ELECTRICAL	D LINEARITY	152 RESISTANCE	W... MODIFICATIONS	e. LEAD FINISH
		Unsealed	Times 25 mm	A: $\leq \pm 1\%$ D: $\leq \pm 0.1\%$ E: $\leq \pm 0.05\%$ F: $\leq \pm 0.025\%$	First 2 digits are significant numbers 3rd digit indicates number of zeros	Special feature code number	

## SAP PART NUMBERING GUIDELINES

RE SERIES	16 LH MODEL	4 TET	D LINEARITY	152 OHMIC VALUE	W... SPECIAL FEATURES
-----------	-------------	-------	-------------	-----------------	-----------------------



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.