



TANTALUM CAPACITOR SOLUTIONS

For Automotive Applications

CAPACITORS

MARKET SOLUTIONS





AUTOMOTIVE APPLICATIONS SOLUTIONS

Using Tantalum Capacitors from Vishay

Tantalum Capacitors for Automotive Applications

Vishay is one of a respected echelon of component manufacturers whose reputation for reliability and quality is complemented by a decades-long record of service to the automotive industry. The company's products are used in every electronic control unit of the typical vehicle to provide functions including power management; electric motor control; data / audio / video signal switching; infrared (IR) signal transmission; protection against overtemperature conditions; airbag ignition; and lighting.


Typical Applications

Body Electric and Comfort Electric

- Sensors
- Immobilizer and Security Systems
- Door / Window / Sunroof Control
- Seat Adjust and Memory
- HVAC (Heating, Ventilating, Air Conditioning)
- Climate Control
- Dashboard and Interior Illumination
- Passive Safety (Airbag, Restraint Systems)
- Reversible Wiper Drives
- Keyless Entry, Passive Entry, Passive Start, Bluetooth Communication
- Car TV and DVD Systems (Multimedia)

Chassis Electric

- Active Safety (ESP, ABS, ASR, USC)
- EPB (Electric Park Brake)
- Electrical Transmission (CVT, ASG, Double Clutch Shifting)
- EAGR, Electrical Catalytic Converter, Diesel Particle Filter
- Active Suspension, Dynamic Control
- Sensors
- Tire Pressure Monitoring
- Electrical Hydraulic Power Steering (EHPS)
- Electrical Power Steering (EPS)

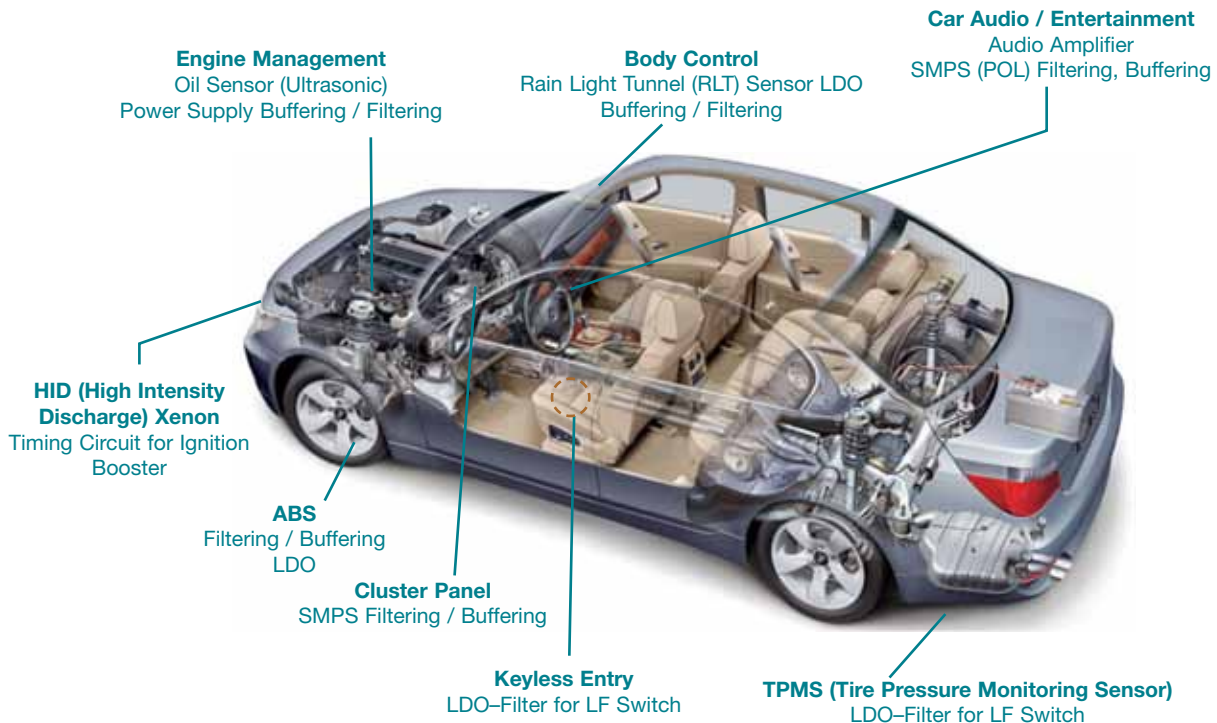

Powertrain (Underhood)

- Common Rail Diesel Electrical Control
- Piezoelectric-Injection Driver
- Engine Control Unit (ECU)
- Turbo Charger Control Unit
- Ignition Electrical Drive
- Engine Sensors
- Electrical Water Pump
- ISG (Integrated Starter Generator 14 V / 42 V)
- Board Load-Control Unit
- Boardnet Management
- Engine Cooling (Electrical Fan Control)

Driver Information

- Driver Information System
- Bluetooth Communication
- GPS Car Navigation and Audio System
- SDARS / Antenna / Amplifier System

Lighting Systems

- Sensors (ACC, LIDAR)
- Headlight Leveling Control and Advanced Front Lighting Headlight Cleaning System
- LED Lighting (Front and Rear)
- HID Electrical (Xenon Driver)
- Sensors (Night Vision Systems, Fog Detection)
- Ambient Lighting

Select Application Examples

Power Management and Conversion

Tantalum capacitor options include devices in a broad variety of case sizes and with the high temperature ratings required by the automotive environment. Tantalum capacitors are available in radial, axial, and SMD formats to provide effective filtering in switchmode power supplies at temperatures up to 150 °C and vibration levels up to 20 G. Molded tantalum capacitors deliver exceptionally stable, high-capacitance performance over a long life and in high-temperature (under-the-hood) environments.

Solid tantalum capacitors in EIA-size SMD packages make an ideal solution for high-volume PCB and hybrid automotive applications. Tantalum molded SMD capacitors in tape-and-reel packaging are widely used for filtering low frequency noise. Vishay also offers a complete line of tantalum capacitors that can be used in through-hole board applications.

Whatever the automotive application, Vishay's extensive tantalum capacitor product offering includes the right part for the job. Throughout automotive electronic systems, Vishay supplies designers and manufacturers with reliable, high-performing, and space-saving capacitors that improve the quality of today's automobiles.

Energy Storage

Today's automotive circuitry requires stability under various loads and peak power requirements. Vishay tantalum capacitors provide a low cost bulk energy storage solution for power bus hold-up applications.







Coupling








Automotive analog circuitry, including audio, sensor, and telematics applications, requires a coupling capacitor to connect two circuits so that only the AC signal passes from the first circuit to the next. The capacitor, often called a blocking capacitor, blocks the DC signal, isolating the DC bias of the two coupled circuits. Vishay tantalum capacitors offer the requisite capacitance, DC leakage current, and stability over temperature and time for automotive analog coupling.



AUTOMOTIVE APPLICATIONS SOLUTIONS

Using Tantalum Capacitors from Vishay

Tantalum Capacitors Selector Guide					
Surface-Mount Series	Case Codes	EIA Sizes	Max. Dimensions L x W x H (mm)	Voltage Range	Features
293D 	A B C D E V	3216-18 3528-21 6032-28 7343-31 7343-43 7343-20	3.4 x 1.8 x 1.8 3.7 x 3.0 x 2.1 6.3 x 6.5 x 2.8 7.6 x 4.6 x 3.1 7.6 x 4.6 x 4.3 7.3 x 4.3 x 2.0	4 V to 63 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 µF to 1000 µF 100 % surge current test (D and E sizes) Lead (Pb)-free, RoHS-compliant
TR3 	A B C D E V	3216-18 3528-21 6032-28 7343-31 7343-43 7343-20	3.4 x 1.8 x 1.8 3.7 x 3.0 x 2.1 6.3 x 6.5 x 2.8 7.6 x 4.6 x 3.1 7.6 x 4.6 x 4.3 7.3 x 4.3 x 2.0	4 V to 63 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.47 µF to 1000 µF Low ESR 100 % surge current test (C, D, E, and V sizes) Lead (Pb)-free, RoHS-compliant
TH3  	A B C D E	3216-18 3528-21 6032-28 7343-31 7343-43	3.4 x 1.8 x 1.8 3.7 x 3.0 x 2.1 6.3 x 6.5 x 2.8 7.6 x 4.6 x 3.1 7.6 x 4.6 x 4.3	6.3 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 150 °C 0.33 µF to 220 µF High temperature 100 % surge current test (B,C, D and E sizes) Lead (Pb)-free, RoHS-compliant AEC-Q200 qualified
TP3  	A B C D E	3216-18 3528-21 6032-28 7343-31 7343-43	3.4 x 1.8 x 1.8 3.7 x 3.0 x 2.1 6.3 x 6.5 x 2.8 7.6 x 4.6 x 3.1 7.6 x 4.6 x 4.3	4 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 µF to 680 µF Low ESR 100 % surge current test (B,C, D and E sizes) Lead (Pb)-free, RoHS-compliant AEC-Q200 qualified

Tantalum Capacitors Selector Guide				
Through-Hole Product	Case Codes	Max. Height Range (mm)	Voltage Range	Features
173D 	U, V, W, X, Y	2.41 to 7.1	2 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 μF to 330 μF Miniature axial-leaded Flame retardant molded case construction Lead (Pb)-free, RoHS-compliant
790D 	A, B, C, D	7.3 to 10.5	6.3 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 μF to 330 μF Standoffs on all radial leaded cases Flame retardant molded case construction Lead (Pb)-free, RoHS-compliant
199D 	A, B, C, D, E, F	7.11 to 16.50	3 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 μF to 680 μF Low leakage, low dissipation factor Epoxy coated radial-leaded Lead (Pb)-free, RoHS-compliant
299D (TriPole) 	A, B, C, D, E, F	9.14 to 15.74	3 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 μF to 680 μF Triple-Lead design allows reverse installations Epoxy coated radial-leaded Lead (Pb)-free, RoHS-compliant
489D/499D 	A, B, C, D, E, F, H, M, N, R	7.0 to 22.0	3 V to 50 V	<ul style="list-style-type: none"> 489D (- 55 °C to + 85 °C) 499D (- 55 °C to + 125 °C) 0.1 μF to 680 μF Low Z and ESR at high frequencies Epoxy coated radial-leaded Lead (Pb)-free, RoHS-compliant
ETQW (EU style) 	1, 2, 3, 4, 5, 6	7.5 to 20.0	3 V to 50 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.1 μF to 470 μF Flame retardant epoxy resin construction Lead (Pb)-free, RoHS-compliant
150D 	A, B, R, S	3.85 to 9.32	6.3 V to 125 V	<ul style="list-style-type: none"> - 55 °C to + 125 °C 0.47 μF to 330 μF Low leakage, low dissipation factor Exceptional operating stability Hermetically sealed metal case construction Lead (Pb)-free, RoHS-compliant



NOTES

DISCLAIMER All product specifications and data are subject to change without notice. Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

SEMICONDUCTORS:

Rectifiers • High-Power Diodes and Thyristors • Small-Signal Diodes • Zener and Suppressor Diodes
• FETs • Optoelectronics • ICs • Modules

PASSIVE COMPONENTS:

Resistive Products • Magnetics • Capacitors



One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY ASIA PTE LTD.
37A TAMPINES STREET 92 #07-00
SINGAPORE 528886
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY CHINA CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258 5000
FAX: +86-21-5258 7979

JAPAN

VISHAY JAPAN CO., LTD.
SHIBUYA PRESTIGE BLDG. 4F
3-12-22, SHIBUYA
SHIBUYA-KU
TOKYO 150-0002
JAPAN
PH: +81-3-5466-7150
FAX: +81-3-5466-7160

EUROPE

GERMANY

VISHAY ELECTRONIC GMBH
GEHEIMRAT-ROSENTHAL-STR. 100
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BLVD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2727
FAX: +33-4-9337-2726

UNITED KINGDOM

VISHAY LTD.
SUITE 6C, TOWER HOUSE
ST. CATHERINE'S COURT
SUNDERLAND ENTERPRISE PARK
SUNDERLAND SR5 3XJ
UNITED KINGDOM
PH: +44-191-516-8584
FAX: +44-191-549-9556

Build **Vishay**
into your **Design**

www.vishay.com

VMN-PL0376-1008