



CHIP RESISTORS AND RESISTOR NETWORKS

RMKHT (CNHT)



High-Temperature (215 °C) Wirebondable Chip Resistors and Resistor Networks

KEY BENEFITS

- Operating temperature range (- 55 °C to + 215 °C)
- Storage temperature (- 55 °C to + 230 °C)
- Temperature coefficient down to 25 ppm (- 55 °C to + 215 °C)
- Tolerance down to 0.05 %
- Wirebondable (aluminum pads)
- Custom network available (CNHT)
- Metalized backside option
- Wide ohmic range (10R to 6M)
- Load life stability: 0.5 % after 1000 h at P_n at 215 °C

APPLICATIONS

- Down-hole drilling instruments
- Aircraft braking systems

High Temperature (215 °C) Wirebondable Chip Resistors and Resistor Networks



FEATURES

- Operating temperature range: - 55 °C; + 215 °C
- Storage temperature: - 55 °C; + 230 °C
- Wirebondable (aluminum pads)
- Large selection of sizes available
- Custom networks available on request (CNHT)
- Temperature coefficient down to 25 ppm (- 55 °C; + 215 °C)
- Tolerance down to 0.05 %
- Compliant to RoHS directive 2002/95/EC



INTRODUCTION

For applications such as down hole applications, the need for parts able to withstand very severe conditions (temperature as high as 215 °C powered or up to 230 °C un-powered) has leaded Vishay Sfernice to push out the limit of the thin film technology.

Designers might read the application note "Power Dissipation Considerations in High Precision Vishay Sfernice Thin Film Chip Resistors and Arrays (P, PPA etc...) (High Temperature Application) www.vishay.com/doc?53047 in conjunction with this datasheet to help them to properly design their PCBs and get the best performances of the RMKHT.


Vishay Sfernice research and development engineers will be willing to support any customer design considerations.

TYPICAL PERFORMANCE

	ABS TRACKING (1)
TCR	25 ppm/°C
TOL.	0.05 %
	RATIO (1)
	0.02 %

Note
(1) When applicable (networks only)

SCHEMATIC AND PATTERN

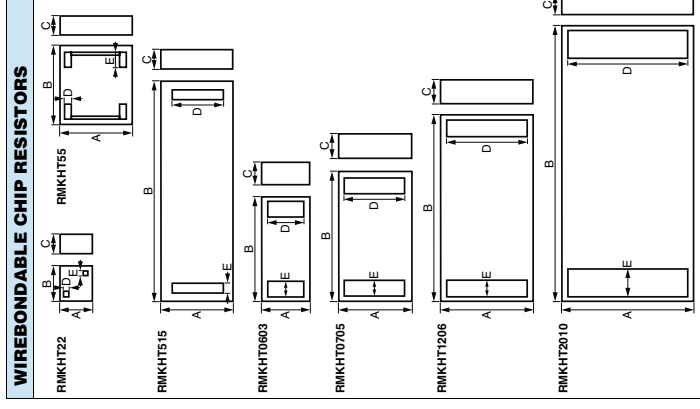

DIMENSIONS in millimeters					
SERIES	A	B	C	D	E
RMKHT22	± 0.1	0.61	0.4 max.	0.08	0.08
RMKHT55	1.345	1.345	0.4 max.	0.11	0.26
RMKHT15	1.345	3.775	0.4 max.	0.96	0.16
RMKHT603	0.9	1.8	0.4 max.	0.68	0.265
RMKHT0805	1.25	2.05	0.4 max.	1.03	0.265
RMKHT1206	1.725	3.2	0.4 max.	1.505	0.29
RMKHT2010	2.64	5.23	0.4 max.	2.42	0.518

DIMENSIONS in millimeters					
SERIES	A	B	C	D	E
RMKHT33	± 0.1	± 0.1	0.855	0.4 max.	0.08
RMKHT48	2	2	0.4 max.	0.1	0.39
RMKHT408	1.6	2.6	0.4 max.	0.11	0.36
RMKHT506	1.7	3.4	0.4 max.	0.13	0.25

Revision 28-Jan-10

MECHANICAL SPECIFICATIONS	
Resistive element	Nichrome (NiCr)
Substrate material	Silicon (size 22, 33, 55, 15) - alumina (other sizes)
Bonding pads	Aluminum (Al)
Passivation	Silicon nitride (Si ₃ N ₄)
Back metallization (1)	Gold on nickel barrier

Note
(1) When applicable (only on alumina substrate)

** Please see document "Vishay Material Category Policy": www.vishay.com/doc?29592

DISCLAIMER All product specifications and data are subject to change without notice. Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or omissions contained herein or in any other disclosure relating to any product. Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed herein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

For technical questions, contact sfer@vishay.com

Build Vishay into your Design