


MINIQFN-8L CARRIER TAPE

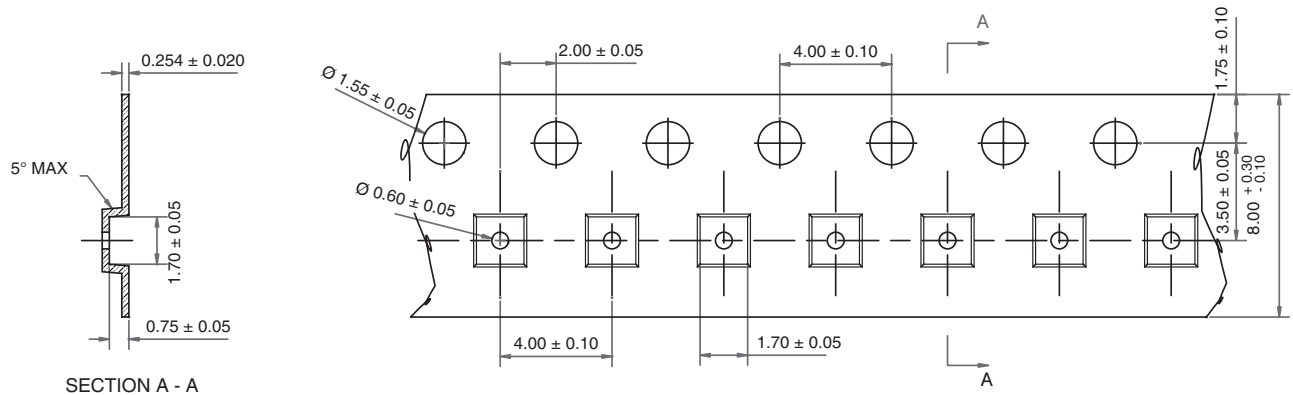

Notes:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm
2. Camber not to exceed 1 mm in 100 mm
3. Material: Black conductive poly carbonate
4. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole
5. Pocket center and pocket hole center must be same position
6. General tolerance ± 0.2

ECN C-07565-Rev. A, 24-Sep-07
 DWG: 93-5256-X