




**MICRO FOOT® 3x2: 0.5-mm PITCH, 0.165-mm BUMP HEIGHT
(DG3000-T1, DG3001-T1, DG3003-T1, DG3003-T1)**

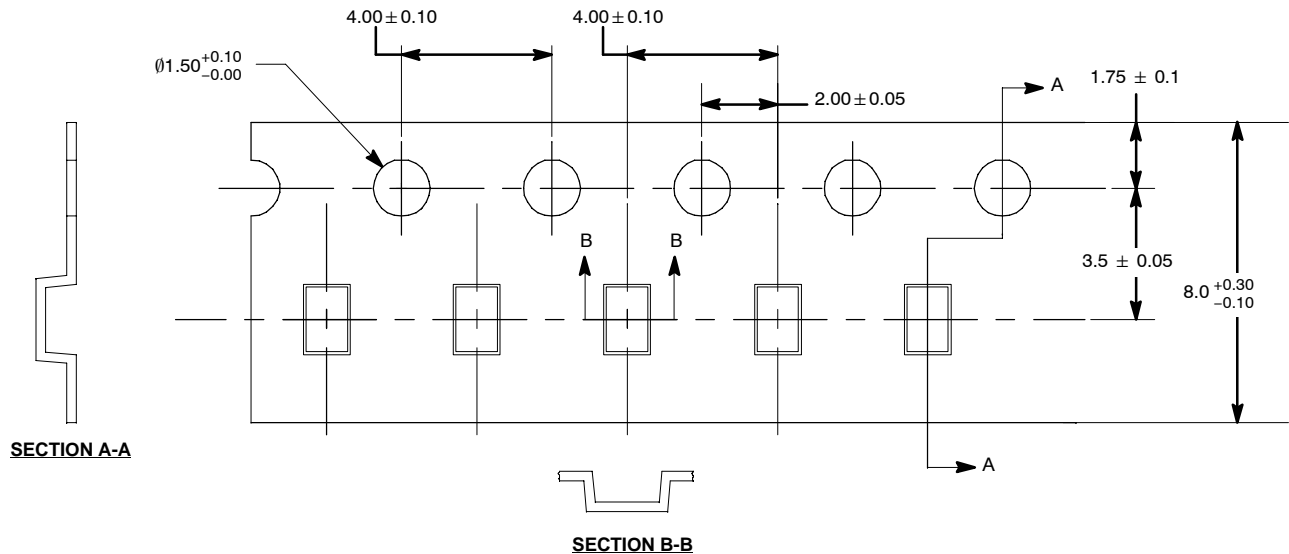

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative
4. It should be measured from:
 - a. sprocket hole to pocket center and
 - b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Use seal tape with 9.3-mm width (See Note 8, drawing 92-5210-x)

QUANTITY PER REEL	
T1	3000
ECN: T-05350—Rev. E, 13-Jun-04 DWG: 93-5221-x	