


## TO-263 (D<sup>2</sup>PAK): 3-LEAD

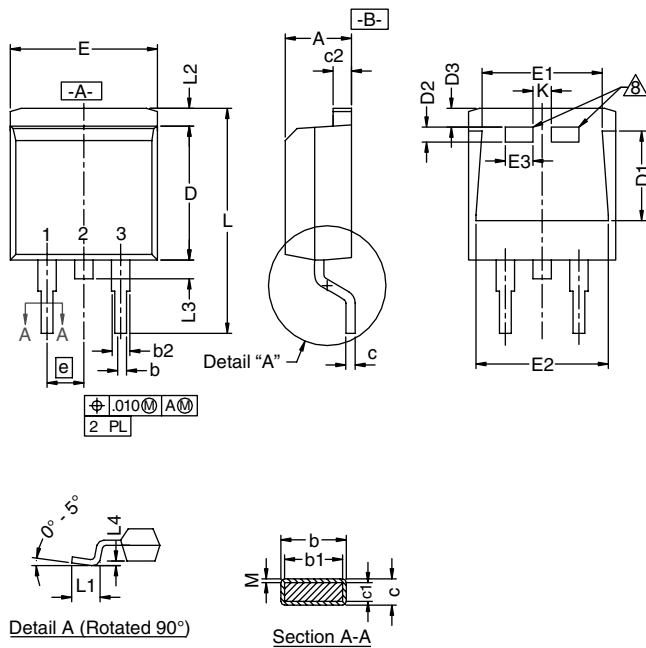

DIM	INCHES		MILLIMETERS		
	Min	Max	Min	Max	
A	0.160	0.190	4.064	4.826	
b	0.020	0.039	0.508	0.990	
b1	0.020	0.035	0.508	0.889	
b2	0.045	0.055	1.143	1.397	
c*	SUB	0.012	0.018	0.305	0.457
	SUM	0.022	0.028	0.559	0.711
c1	0.018	0.025	0.457	0.635	
c2	0.045	0.055	1.143	1.397	
D	0.340	0.380	8.636	9.652	
D1	0.220	0.240	5.588	6.096	
D2	0.038	0.042	0.965	1.067	
D3	0.045	0.055	1.143	1.397	
E	0.380	0.410	9.652	10.414	
E1	0.245	-	6.223	-	
E2	0.355	0.375	9.017	9.525	
E3	0.027	0.078	1.829	1.981	
e	0.100 BSC		2.54 BSC		
K	0.045	0.055	1.143	1.397	
L	0.575	0.625	14.605	15.875	
L1	0.090	0.110	2.286	2.794	
L2	0.040	0.055	1.016	1.397	
L3	0.050	0.070	1.270	1.778	
L4	0.010 BSC		0.254 BSC		
M	-	0.002	-	0.050	
ECN: T-07476-Rev. I, 06-Aug-07					
DWG: 5843					

**Notes:**

- Plane B includes maximum features of heat sink tab and plastic.
- No more than 25 % of L1 can fall above seating plane by maximum 8 mils.
- Pin-to-pin coplanarity maximum 4 mils.
- Lead thickness 25 mils
- \* For SUM part numbers lead thickness is 24 ~ 29 mil.
- \*\* For reference only.
- Use inches as the primary measurement.
- This feature is only for SUM.