


### SC-70: 3-LEADS (T1-METHOD)

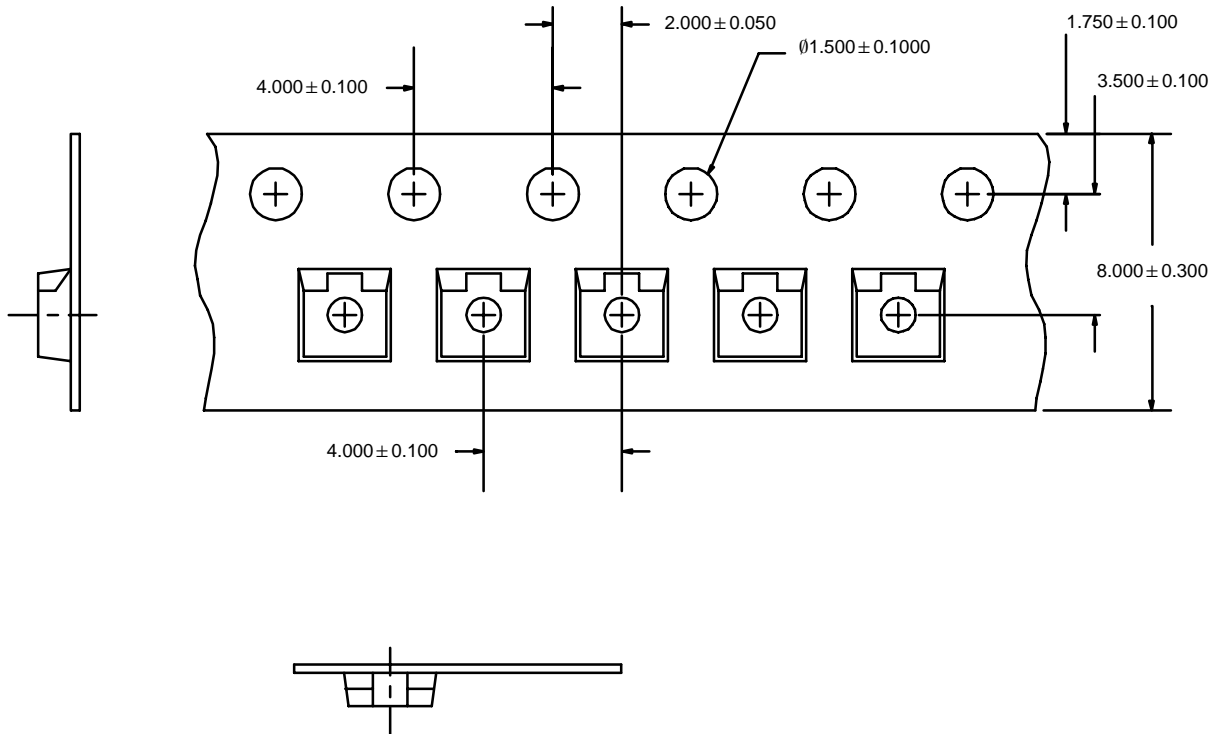

#### NOTES:

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.2$ .
2. Camber not to exceed 1 mm in 100 mm.
3. Material PS + C.
4. Pocket position relative to sprocket hold measured as the true position of pocket, not pocket hole.
5. All size in mm unless specified.

QUANTITY PER REEL	
T1	3,000
ECN: S-40346—Rev. E, 15-Mar-04 DWG: 93-5214-1	