


SC-70: 5- AND 6-LEADS (T1 AND T3 METHODS)

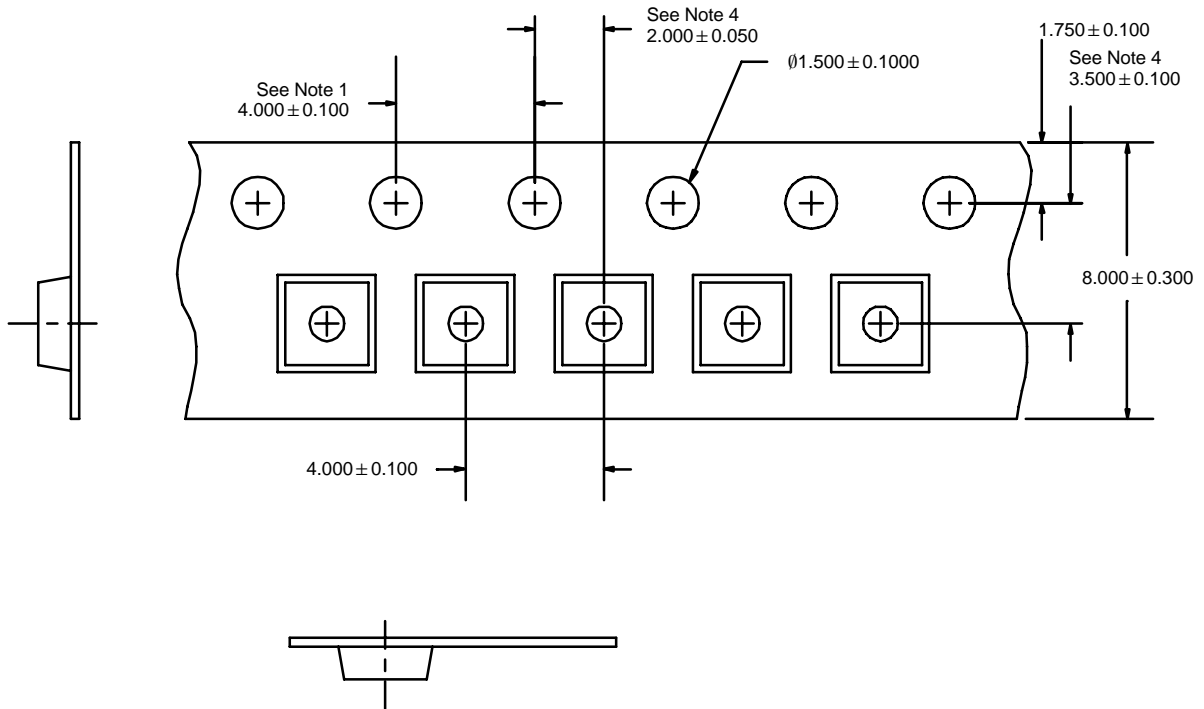

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative.
4. Should be measured from: a) sprocket hole to pocket center, and, b) sprocket hole to pocket hole.
5. All size in mm unless specified.
6. Tolerances will be ± 0.1 mm unless specified.

QUANTITY PER REEL	
T1	3,000
T3*	10,000
ECN: S-40346—Rev. H, 15-Mar-04 DWG: 93-5213-1	

*Not a standard offering. Please contact local sales office for availability.