




TSSOP: 8 LEAD (16 MM)

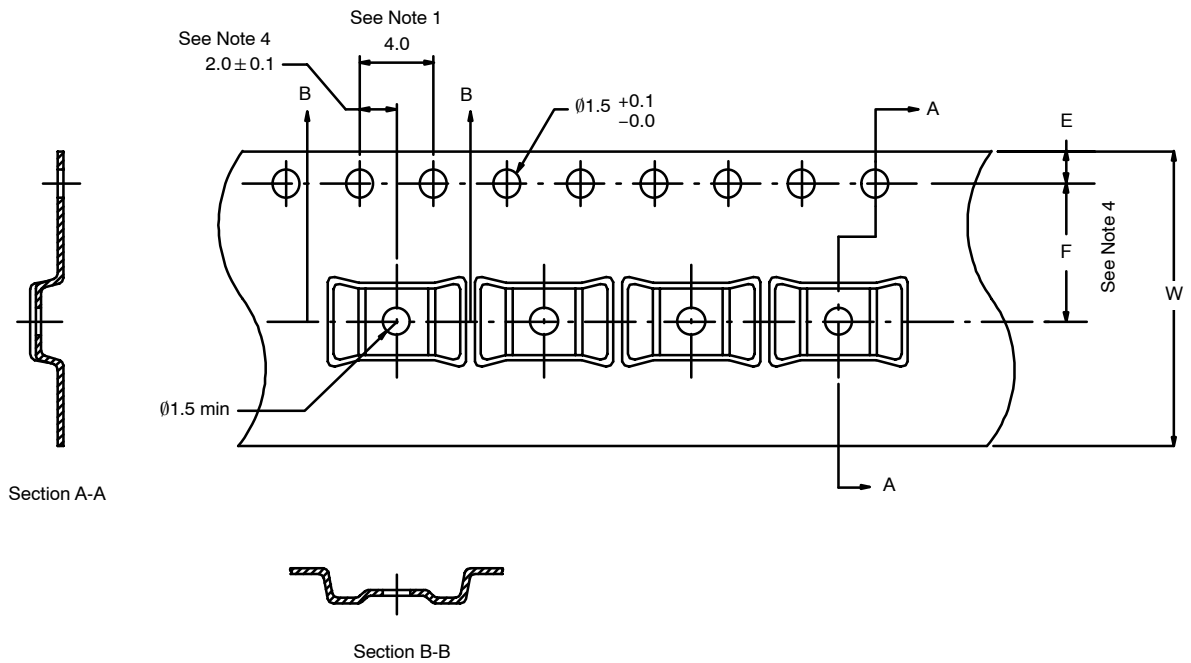

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative
4. It should be measured from:
 - a. sprocket hole to pocket center
 - and
 - b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Tolerances will be ± 0.1 mm unless specified.

QUANTITY PER REEL	
T1	3,000
ECN: S-40501—Rev. I, 17-May-04 DWG: 90-2345-x	