


## PowerPAK® 1212

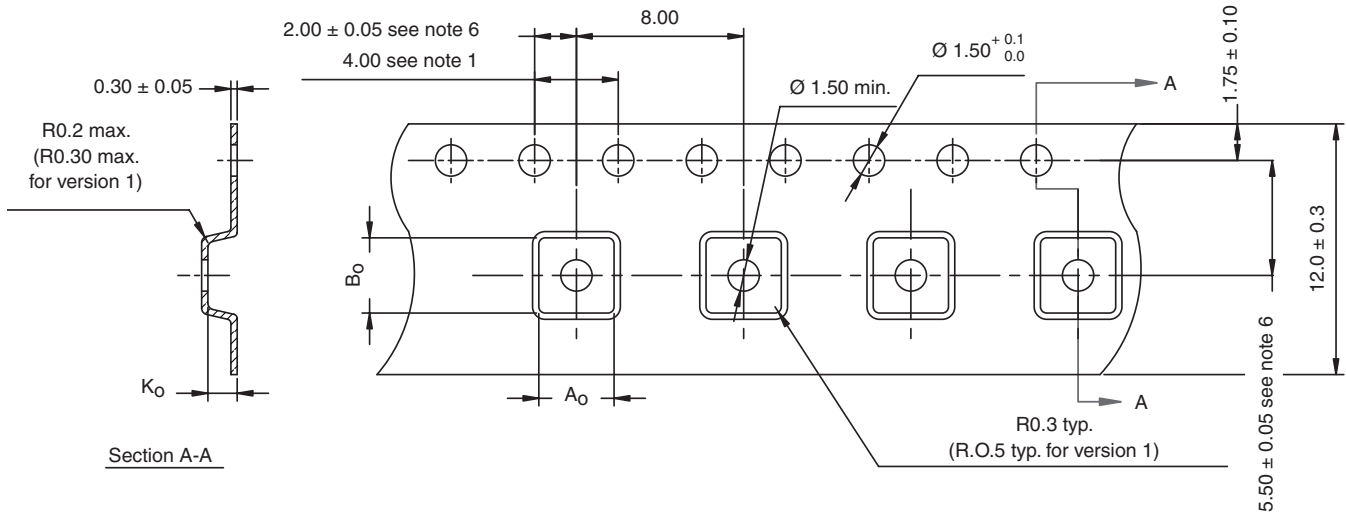

Version	A <sub>0</sub>	B <sub>0</sub>	K <sub>0</sub>
- 1	3.7 ± 0.1	3.7 ± 0.1	1.4 ± 0.1
- 2 (TW only)	3.6 ± 0.1	3.6 ± 0.1	1.4 ± 0.1

### Notes

- 10 sprocket hole pitch cumulative tolerance ± 0.2.
- Camber not to exceed 1 mm in 100 mm.
- Material: black advantek polystyrene.
- A<sub>0</sub> and B<sub>0</sub> measured on a plane 0.3 mm above the bottom of the pocket.
- K<sub>0</sub> measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- It should be measured from:
  - sprocket hole to pocket center
  - sprocket hole to pocket hole
- All sizes in mm unless specified.
- Tolerances will be ± 0.1 mm unless specified.

QUANTITY PER REEL	
T1	3000
ECN: T-08006-Rev. D, 11-Feb-08 DWG: 90-2379-x	