




**MICRO FOOT® 2x3: 0.8-mm PITCH, 0.275-mm BUMP HEIGHT
(Si8407DB-T2, Si8902EDB-T2)**

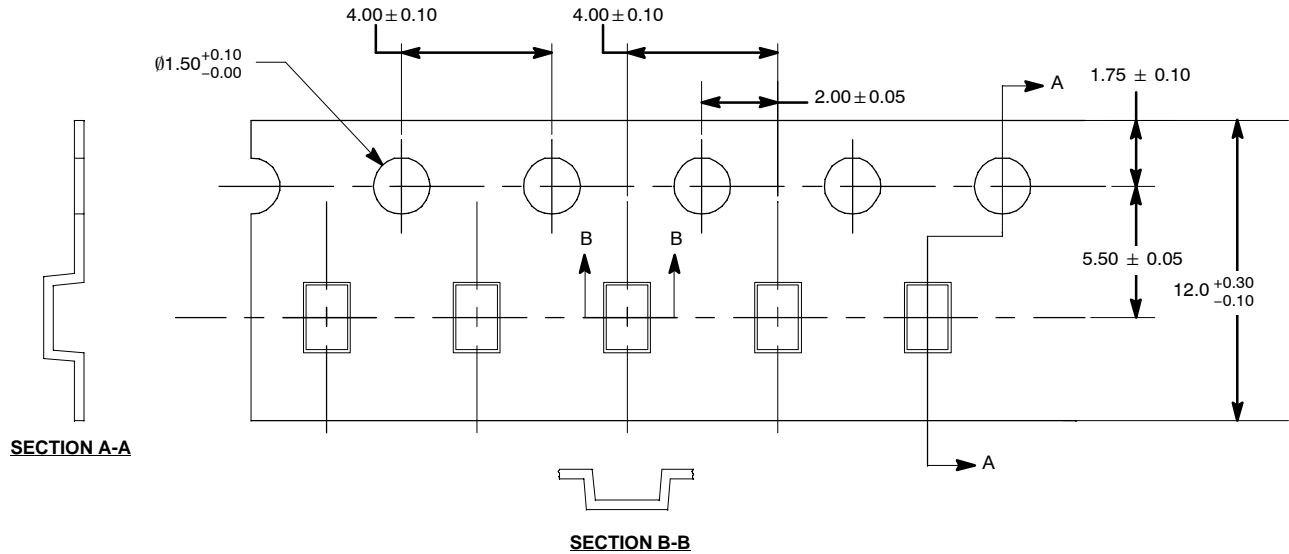

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative
4. It should be measured from:
 - a. sprocket hole to pocket center
 - and
 - b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Use seal tape with 9.3-mm width (See Note 7, drawing 92-5210-x)

QUANTITY PER REEL	
T2	3000
ECN: S-40510—Rev. C, 17-May-04 DWG: 93-5223-X	